


Ceramic Disc Capacitors (Straight Leads) Gap-Kap 1 kV to 3 kV

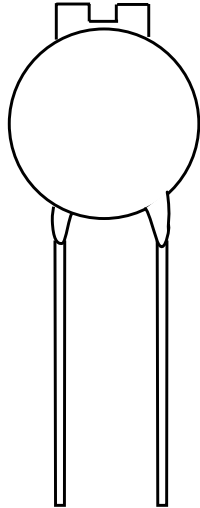

Simplified Outline

FEATURES

- High reliability
- Straight leads
- Lead (Pb)-free available

APPLICATIONS

- Monitors
- Color TV

DESIGN

The capacitors consist of a ceramic disc both sides of which are silver-plated. Connection leads are made of tinned copper having a diameter of 0.8 mm.

The capacitors are supplied with straight leads and lead spacings from 5.0 mm to 10.0 mm. Encapsulation is phenolic resin coated, flammable resistant in accordance with "UL94V-0".

INTRODUCTION

BCcomponents Gap-Kap capacitors provide a safe reliable discharge path for stray transient overvoltages and static voltage build-up. Combination of capacitor-spark-gap construction allows the circuit designer to specify lower voltage components and consequently lower cost, with assurance that overvoltage conditions will be prevented.

The Gap-Kap capacitor is ideally suited for many industrial commercial equipment applications. A typical application in color TV monitors utilizes a minimum capacitance Gap-Kap which is inserted between the grid lead and chassis ground. This protects the components of control circuitry by providing a low impedance path to ground for transient voltages of 1500 volts and above.

CAPACITANCE RANGE:

At 1 kHz, 1 ± 0.2 V (RMS); 0.75 to 22 000 pF

RATED DC VOLTAGE:

1 kV; 1.5 kV; 3 kV

INSULATION RESISTANCE AT 500 V (DC):

$\geq 10\,000$ M Ω min.

TOLERANCE ON CAPACITANCE:

± 10 %; ± 20 %

DISSIPATION FACTOR:

At 1 kHz, 1 ± 0.2 V (RMS); 2.5 % max



RoHS
COMPLIANT

TEMPERATURE COEFFICIENTS:

EIA code Z5P or Z5U

SECTIONAL SPECIFICATIONS:

Class 2 IEC 60 384-9,

EIA 198

OPERATING TEMPERATURE RANGE:

- 30 to + 85 °C

MARKING

Marking indicates capacitance value and tolerance in accordance with "EIA 198" and voltage marks.

The capacitors meet the essential requirements of IEC 60 384-9 and EIA 198. Unless stated otherwise all electrical values apply at an ambient temperature of 25 ± 3 °C, at normal atmospheric conditions.



ORDERING INFORMATION							
C (pF)	TOL. (%)	VOLTAGE		D _{max} (mm)	T _{max} (mm)	LEAD SPACING S (mm)	CLEAR TEXT CODE 16 th DIGIT: R = RoHS COMPLIANT
		WORKING (kV _{DC})	ARC (kV _{DC})				
0.75	max	1.0	1.0 - 2.0	11.0	5.0	5.0	S758X43000183L5.
						6.4	S758X43000183L6.
1000	± 20	1.5	2.0 - 3.0	11.0	4.5	5.0	S102M43Z5P283L5.
						6.4	S102M43Z5P283L6.
4700	± 20	3.0	4.0 - 6.0	24.5	6.0	10.0	S472M96Z5P483L0.
10 000	± 20	1.5	2.0 - 3.0	17.5	5.0	10.0	S103M69Z5U283L0.
22 000	± 20	1.5	2.0 - 3.0	24.5	4.5	10.0	S223M96Z5U283L0.

PACKAGING					
PACKAGING TYPE	SIZE CODE	LEAD SPACE (mm)	VOLTAGE (VDC)	SPQ	BOX DIMENSIONS L × W × H (mm)
Bulk (long lead L ≥ 25.4 mm)	20 to 47	all	all	1000	245 x 120 x 65
				1000	
	1000				
	500				
	84 to 96			250	

Note

The capacitors are supplied in bulk packaging (cardboard boxes).



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.