


Capacitor, tantalum, 330 uF, 7343, +/-10% Tol, 10V@85C

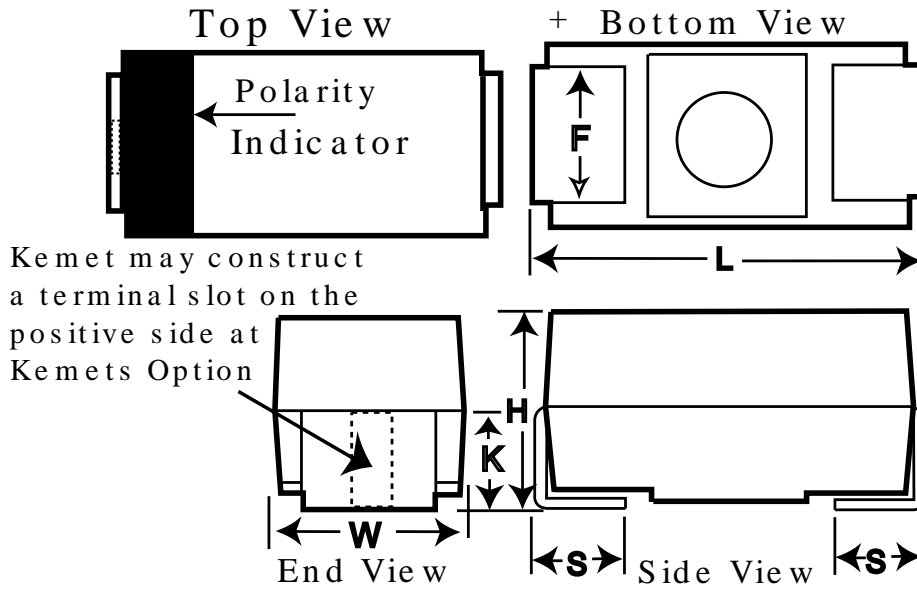

Dimensions (mm)

Specifications

| ID | Dimension | Tolerance | Manufacturer: | KEMET |
|----|-----------|-----------|---------------------|-----------------|
| L | 7.3 | +/-0.3 | Capacitance: | 330 uF |
| W | 4.3 | +/-0.3 | Voltage DC @ 85C: | 10V |
| H | 4.1 | +/-0.3 | Voltage DC @ 105C: | 8.2V |
| K | 1.8 | nom | Voltage DC @ 125C: | 6.3V |
| F | 2.4 | +/-0.1 | Tolerance: | +/-10% |
| S | 1.3 | +/-0.3 | Application: | General Purpose |
| | | | Body Type: | Molded Chip |
| | | | Temperature Range: | -55/+125C |
| | | | Footprint: | 7343 |
| | | | Termination: | Tin |
| | | | Leakage Current: | 33 uA |
| | | | Dissipation Factor: | 10% |
| | | | Impedance @ 100kHz: | 600 mOhm |
| | | | Package Kind: | T&R |
| | | | Package Quantity: | 1800 |

Notes:

-E