

SuperTan[®] Extended (STE) Capacitors Wet Tantalum with Hermetic Seal



FEATURES

Vishay SuperTan[®] Extended (STE) represents a major breakthrough in wet tantalum capacitor technology. Its unique cathode system, also used in the ST, provides the highest capacitance per unit volume available. The STE combines the inherent reliability of wet tantalum with the capacitance stability of solid tantalum, and there are no circuit impedance restrictions. The range is exceptionally well suited for low voltage filtering and energy storage applications. Ideal for designs targeting the military and aerospace industry.



RoHS*
COMPLIANT

The SuperTan[®] Extended (STE) is housed in an all tantalum, hermetically sealed case and is manufactured to withstand high stress and hazardous environments.

- Terminations: Standard tin/lead (Sn/Pb) 100 % tin available terminations
- Compliant to RoHS directive 2002/95/EC

PERFORMANCE CHARACTERISTICS

Operating Temperature: - 55 °C to + 85 °C (to + 125 °C with voltage derating)

Capacitance Tolerance: At 120 Hz, + 25 °C. ± 20 % standard.
± 10 % available as special.

DC Leakage Current (DCL Max.): At + 25 °C and above: Leakage current shall not exceed the values listed in the Standard Ratings Tables.

Life Test: Capacitors are capable of withstanding a 2000 h life test at a temperature of + 85 °C at the applicable rated DC working voltage.


ORDERING INFORMATION						
STE	6000	16	T4	M	I	E3
TYPE	CAPACITANCE μF	DC VOLTAGE RATING AT + 85 °C	CASE SIZE	CAPACITANCE TOLERANCE	INSULATING SLEEVE	RoHS COMPLIANT
				M = ± 20 % K = ± 10 %	I = Insulated X = Uninsulated	E3 = 100 % tin termination (RoHS compliant) Blank = SnPb termination (standard design)

Note

Packaging: The use of formed plastic trays for packaging this type of axial lead component is standard. Tape and reel is not recommended due to the unit weight.

* Pb containing terminations are not RoHS compliant, exemptions may apply

DIMENSIONS in inches [millimeters]

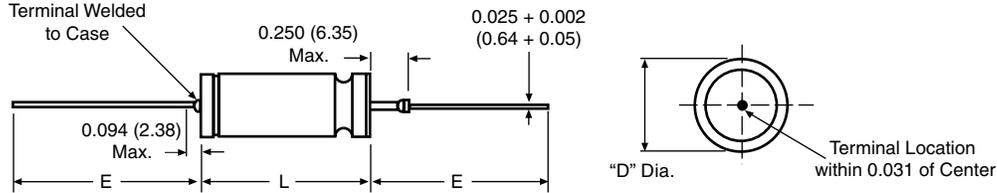

CASE CODE	D MAX. INSULATED	D ± 0.016 (0.41)	L + 0.031 (0.79) UNINSULATED	E ± 0.250 (6.35) MAX.
T1	0.219 (5.56)	0.188 (4.78)	0.453 (11.51)	1.500 (38.10)
T2	0.312 (7.92)	0.281 (7.14)	0.641 (16.28)	2.250 (57.15)
T3	0.406 (10.31)	0.375 (9.52)	0.766 (19.46)	2.250 (57.15)
T4	0.406 (10.31)	0.375 (9.52)	1.062 (26.97)	2.250 (57.15)

Notes

- Material at egress is tantalum
- Insulation sleeving will lap over the ends of the capacitor case
- Tinned nickel leads, solderable and weldable

Approx. Weight

- T1: 2.3 g, T2: 5.7 g
- T3: 9.4 g, T4: 14.8 g

STANDARD RATINGS

CAP. (µF)	VOLTAGE	CASE CODE	PART NUMBER	MAX. ESR AT +25 °C 120 Hz (Ω)	TYP. ESR AT +25 °C 1 kHz (Ω)	MAX. DCL AT		MAX. CAPACITANCE CHANGE AT			MAX. IMP. AT -55 °C 120 Hz (Ω)	AC RIPPLE 85 °C 40 kHz mA RMS
						+25 °C (µA)	+85 °C / +125 °C (µA)	-55 °C (%)	+85 °C (%)	+125 °C (%)		
10 WVDC at +85 °C. . .												
4700	10	T3	STE4700-10T3MI	0.35	0.20	16	100	-80	+10	+20	3.5	4000
10 000	10	T4	STE10000-10T4MI	0.25	0.100	25	150	-85	+20	+35	3.0	5000
16 WVDC at +85 °C. . . 11 WVDC at +125 °C												
3300	16	T3	STE3300-16T3MI	0.35	0.20	16	100	-80	+10	+15	3.5	4000
6000	16	T4	STE6000-16T4MI	0.3	0.15	25	150	-80	+15	+20	3.0	4500
25 WVDC at +85 °C... 15 WVDC at +125 °C...												
4000	25	T4	STE4000-25T4MI	0.35	0.15	25	125	-80	+15	+20	5.0	4250
30 WVDC at +85 °C... 20 WVDC at +125 °C...												
3300	30	T4	<i>Preliminary value, contact marketing</i>									
35 WVDC at +85 °C... 22 WVDC at +125 °C...												
2800	35	T4	<i>Preliminary value, contact marketing</i>									
50 WVDC at +85 °C... 30 WVDC at +125 °C...												
1500	50	T4	STE1500-50T4MI	0.45	0.23	15	110	-70	+20	+20	6.0	3500
60 WVDC at +85 °C. . . 40 WVDC at +125 °C												
1000	60	T4	STE1000-60T4MI	0.5	0.30	20	120	-40	+10	+15	5.5	3500
75 WVDC at +85 °C... 50 WVDC at +125 °C...												
180	75	T2	STE180-75T2MI	1.50	0.50	5	25	-35	15	+20	30	2000
470	75	T3	STE470-75T3MI	0.6	0.33	25	100	-45	+10	+25	10	3000
750	75	T4	STE750-75T4MI	0.5	0.40	20	120	-35	+10	+15	6.5	3500
100 WVDC at +85 °C. . . 65 WVDC at +125 °C												
400	100	T4	STE400-100T4MI	0.70	0.40	10	120	-40	+6	+12	15	3000
125 WVDC at +85 °C... 85 WVDC at +125 °C...												
270	125	T4	<i>Preliminary value, contact marketing</i>									



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.