

AVX is a leading worldwide manufacturer and supplier of a broad line of passive electronic components and Interconnects.

AVX enjoys significant competitive advantages including the benefit of having research, manufacturing, and customer support facilities in 15 countries around the world. This assures customers of the most efficient balance of delivery and production capability in response to their just-in-time inventory requirements. With major research and development centers in five locations around the world, AVX has fostered customer relationships involving the design and technology for new and advanced products to fulfill their special end product requirements.

AVX research and development has anticipated and adapted products that help fuel the explosive growth in communications technology.

Tantalum Capacitors/ Niobium Oxide Capacitors Series Guide

Resin-Molded									
Standard									
General (Standard)		Low Profile		Low ESR			Face-Down		
F93	TAJ	F92	TAJ	F91	TPS	TPM	F98	F98-AS1	
Small Case	High Voltage	Small Case	High Voltage	Small Case	High Voltage	Multi anode	Small Case High Capacitance	Fused	
High Reliability									
General (High Reliability)		Small Case High Capacitance		Low ESR			High Temperature		
F97	TRJ	F93-AJ6		F91-AJ6	TRM		F97-HT3	THJ	
Small Case	High Voltage			Small Case High Capacitance	Multi anode		Small Case	High Voltage	

Conductive Polymer					
Ultra Small Case High Capacitance		Small Case High Capacitance		High Voltage	Low ESR
F38		TCN		TCJ	TCM

Conformal Coated			
Small Case Low Profile		Low Profile	High Capacitance
F95-AM1 (AUDIO) F95		F72	F75

Niobium Oxide Capacitors OxiCap®			
General		Low ESR	Multianode
NOJ		NOS	NOM

TAP
Leaded

* Option

Tantalum Capacitors Product Line-up

Series	Resin-Molded (Standard)				
	F93	TAJ	F92	TAJ (Low Profile)	F91
Features	- General - Small Case	- General - High Voltage	- Low Profile - Small Case	- Low Profile - High Voltage	- Low ESR - Small Case
Appearance					
Type	Resin-Molded Chip	Resin-Molded Chip	Resin-Molded Chip	Resin-Molded Chip	Resin-Molded Chip
Operating Temperature Range (°C)	-55 to +125	-55 to +125	-55 to +125	-55 to +125	-55 to +125
Voltage Range (V)	4 to 35	2.5 to 50	4 to 35	2.5 to 50	4 to 35
Capacitance (μF)	0.68 to 680	0.1 to 2200	0.22 to 150	0.1 to 1000	6.8 to 680
Tolerance (%)	±20, ±10	±20, ±10	±20	±20, ±10	±20, ±10
Leakage Current (μA)	0.01CV or 0.5 max.	0.5 to 60	0.01CV to 0.1CV or 0.5 max.	0.5 to 28.2	0.01CV or 0.5 max.
Dissipation Factor (%)	4 to 40 max.	4 to 60 max.	4 to 30 max.	4 to 30 max.	6 to 18 max.
Failure Rate Level	at 85°C Rated Voltage Applied 1% / 1000 hours	at 85°C Rated Voltage Applied 1% / 1000 hours	at 85°C Rated Voltage Applied 1% / 1000 hours	at 85°C Rated Voltage Applied 1% / 1000 hours	at 85°C Rated Voltage Applied 1% / 1000 hours
Typical applications*	Consumer products, Industrial equipments				

Series	Resin-Molded (Standard)		Resin-Molded (High Reliability)		
	TPS/ TPM	F98/ F98-AS1	F97	TRJ	F93-AJ6
Features	- Low ESR - High Voltage - Multinode (TPM)	- Face-Down Terminal - Small Case - High Capacitance - Fused type (F98-AS1)	- General - Small Case	- General - High Voltage	- Small Case - High Capacitance
Appearance					
Type	Resin-Molded Chip	Resin-Molded Chip	Resin-Molded Chip	Resin-Molded Chip	Resin-Molded Chip
Operating Temperature Range (°C)	-55 to +125	-55 to +125	-55 to +125	-55 to +125	-55 to +125
Voltage Range (V)	2.5 to 50	4 to 25 (F98) 10 to 35 (F98-AS1)	6.3 to 35	6.3 to 50	4 to 35
Capacitance (μF)	0.15 to 2200	1 to 220 (F98) 1 to 47 (F98-AS1)	0.33 to 150	0.1 to 680	1 to 680
Tolerance (%)	±20, ±10	±20	±20, ±10	±20, ±10	±20, ±10
Leakage Current (μA)	0.5 to 63	0.01CV to 0.2CV or 0.5 max.	0.01CV or 0.5 max.	0.3 to 39	0.01CV or 0.5 max.
Dissipation Factor (%)	4 to 60 max.	6 to 80 max. (F98) 18 to 30 max. (F98-AS1)	4 to 15 max.	4 to 30 max.	4 to 30 max.
Failure Rate Level	at 85°C Rated Voltage Applied 1% / 1000 hours	at 85°C Rated Voltage Applied 1% / 1000 hours	at 85°C Rated Voltage Applied 0.5% / 1000 hours	at 85°C Rated Voltage Applied 0.5% / 1000 hours	at 85°C Rated Voltage Applied 1% / 1000 hours
Typical applications*	Consumer products, Industrial equipments		Automotive products, Industrial equipments		

Series	Resin-Molded (High Reliability)			
	F91-AJ6	TRM	F97-HT3	THJ
Features	- Low ESR - Small Case - High Capacitance	- Low ESR - Multinode	- Temperature 135°C - Small Case - High Capacitance	- Temperature 175°C, 200°C - High Voltage
Appearance				
Type	Resin-Molded Chip	Resin-Molded Chip	Resin-Molded Chip	Resin-Molded Chip
Operating Temperature Range (°C)	-55 to +125	-55 to +125	-55 to +135	-55 to +175, +200
Voltage Range (V)	6.3 to 16	2.5 to 50	6.3 to 35	6.3 to 50
Capacitance (μF)	10 to 47	4.7 to 1500	0.33 to 100	0.1 to 220
Tolerance (%)	±20, ±10	±20, ±10	±20, ±10	±20, ±10
Leakage Current (μA)	0.01CV or 0.5 max.	1.8 to 30	0.01CV or 0.5 max.	0.5 to 22
Dissipation Factor (%)	6 to 12 max.	6 to 8 max.	4 to 15 max.	3 to 10 max.
Failure Rate Level	at 85°C Rated Voltage Applied 1% / 1000 hours	at 85°C Rated Voltage Applied 0.5% / 1000 hours	at 95°C Rated Voltage Applied 0.5% / 1000 hours	at 85°C Rated Voltage Applied 0.5% / 1000 hours
Typical applications*	Automotive products, Industrial equipments			

* This table is not intended to limit the applications. Please see each page of products for detailed specifications.

Tantalum Capacitors Product Line-up

Series	Conductive Polymer			
	F38	TCN	TCJ	TCM
Features	•Ultra Small case •High Capacitance •Face-Down Terminal •Low ESR •High Ripple	•Small case •High Capacitance •Face-Down Terminal •Low ESR •High Ripple	•High Voltage •Low ESR •High Ripple	•Ultra Low ESR •High Ripple •Multianode
Appearance				
Type	Conductive Polymer Resin Molded Chip	Conductive Polymer Resin Molded Chip	Conductive Polymer Resin Molded Chip	Conductive Polymer Resin Molded Chip
Operating Temperature Range (°C)	-55 to +105	-55 to +105	-55 to +85, +105, +125	-55 to +105
Voltage Range (V)	6.3 to 10	6.3 to 35	2.5 to 125	4 to 100
Capacitance (μF)	2.2 to 68	4.7 to 1000	0.47 to 470	10 to 1000
Tolerance (%)	±20	±20	±20	±20
Leakage Current (μA)	0.2CV or 10 max.	35 to 600	2.5 to 282	77 to 408
Dissipation Factor (%)	6 to 15 max	6 to 30 max.	6 to 12 max.	8 max.
Failure Rate Level	at 85°C Rated Voltage Applied 1% / 1000 hours	at 85°C Rated Voltage Applied 1% / 1000 hours	at 85°C Rated Voltage Applied 1% / 1000 hours	at 85°C Rated Voltage Applied 1% / 1000 hours
Typical applications*	Consumer products, Industrial equipments			

Series	Conformal Coated		
	F95-AM1/ F95	F72	F75
Features	•For Audio Equipment (F95-AM1) •Small Rectangular •Low ESR/ impedance, Excellent High Frequency Characteristics	•Low Profile •High Capacitance •Low ESR/ impedance, Excellent High Frequency Characteristics	•High Capacitance •Low ESR/ impedance, Excellent High Frequency Characteristics
Appearance			
Type	Coformal Coated Chip	Coformal Coated Chip	Coformal Coated Chip
Operating Temperature Range (°C)	-55 to +125	-55 to +125	-55 to +125
Voltage Range (V)	4 to 10 (F95-AM1) / 4 to 35 (F95)	4 to 16	4 to 16
Capacitance (μF)	68 to 470 (F95-AM1) / 1 to 470 (F95)	33 to 1500	68 to 2200
Tolerance (%)	±20, ±10	±20, ±10	±20, ±10
Leakage Current (μA)	0.01CV to 0.02CV or 0.5 max.	0.01CV to 0.02CV or 0.5 max.	0.01CV to 0.02CV or 0.5 max.
Dissipation Factor (%)	10 to 40 max. (F95-AM1) / 4 to 40 max (F95)	6 to 45 max.	10 to 45 max.
Failure Rate Level	at 85°C Rated Voltage Applied 1% / 1000 hours	at 85°C Rated Voltage Applied 1% / 1000 hours	at 85°C Rated Voltage Applied 1% / 1000 hours
Typical applications*	Consumer products, Industrial equipments		

Niobium Oxide Capacitors OxiCap® Product Line-up


Series	Niobium Oxide Capacitors OxiCap®	
	NOJ	NOS/ NOM
Features	•Non burn safe technology •General	•Non burn safe technology •Low ESR •Multianode (NOM)
Appearance		
Type	Resin-Molded Chip	Resin-Molded Chip
Operating Temperature Range (°C)	-55 to +105	-55 to +125
Voltage Range (V)	1.8 to 10	1.8 to 6.3
Capacitance (μF)	4.7 to 1000	10 to 1000
Tolerance (%)	±20	±20
Leakage Current (μA)	1.1 to 80	1.1 to 56.4
Dissipation Factor (%)	6 to 20 max.	6 to 16 max.
Failure Rate Level	at 85°C Rated Voltage Applied 0.5% / 1000 hours	at 85°C Rated Voltage Applied 0.2% / 1000 hours
Typical applications*	Automotive products, Industrial equipments, Consumer products	

Compliance with RoHS Directive

Compliance with RoHS Directive	Compliant
Leaded (Pb) Chromium(VI) Mercury Cadmium PBB PBDE	Dose not contain
MSL (IPC/ JEDC J-STD-020)	* LEVEL 1 to LEVEL 3

* If you need detailed information about MSL LEVEL, please contact us.

* This table is not intended to limit the applications. Please see each page of products for detailed specifications.

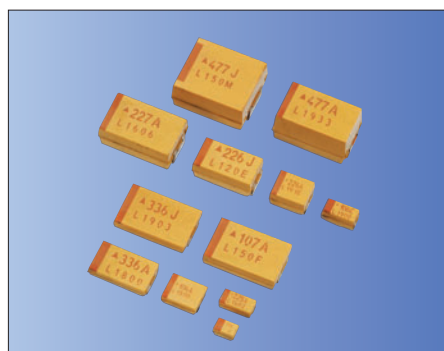

RoHS Compliant

Features

- 50V type is available
 - 2200 μ F/ 2.5V (V case) is available
 - 25m Ω ESR type is available
- 50 for TPS series

Applications

- Electronic Equipment in General
- CPU's
- Power Supply Circuit

How to Order

TAJ B 107 M 010 R NJ

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

TPS B 107 M 010 R 0400 ☐

① ② ③ ④ ⑤ ⑥ ⑧ ⑨

TPM E 108 M 004 R 0018
 (1) (2) (3) (4) (5) (6) (8)

- ① Series
- ② Case Size (See Table)
- ③ Capacitance (pF)
(Code: 2 Significant Digits and Number of Zeros)

- ④ Tolerance

K	$\pm 10\%$	M	$\pm 20\%$
----------	------------	----------	------------

- ⑤ Rated DC Voltage

ex.		006	6.3VDC
002	2.5VDC	016	16VDC

- ⑥ Packaging

R	Plastic Tape (7" Reel)
----------	------------------------

- ### ⑦ Specification

NJ	Standard
-----------	----------

- ⑧ ESR

ex.	0100	100mΩ
-----	------	-------


- ⑨ Option

V	Dry pack
----------	----------

Note: Dry pack is standard for TPM Series.

Case Dimensions

(Unit: mm)

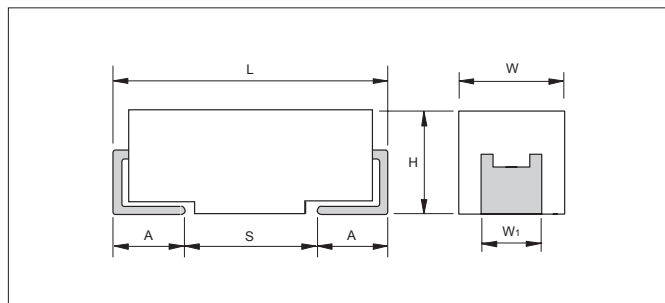

Case size	L	W	H	W ₁	A	S min.
A	3.2±0.2	1.6 ^{+0.2} _{-0.1}	1.6 ^{+0.2} _{-0.1}	1.2±0.2	0.8 ^{+0.3} _{-0.2}	1.1
B	3.5±0.2	2.8 ^{+0.2} _{-0.1}	1.9 ^{+0.2} _{-0.1}	2.2±0.2	0.8 ^{+0.3} _{-0.2}	1.4
C	6.0±0.2	3.2 ^{+0.2} _{-0.1}	2.6 ^{+0.2} _{-0.1}	2.2±0.2	1.3 ^{+0.3} _{-0.2}	2.9
D	7.3±0.2	4.3 ^{+0.2} _{-0.1}	2.9 ^{+0.2} _{-0.1}	2.4±0.2	1.3 ^{+0.3} _{-0.2}	4.4
E	7.3±0.2	4.3 ^{+0.2} _{-0.1}	4.1 ^{+0.2} _{-0.1}	2.4±0.2	1.3 ^{+0.3} _{-0.2}	4.4
U	7.3±0.2	6.1 ^{+0.2} _{-0.1}	4.1 ^{+0.2} _{-0.1}	3.1±0.2	1.3 ^{+0.3} _{-0.2}	4.4
V	7.3±0.2	6.1 ^{+0.2} _{-0.1}	3.55 ^{+0.2} _{-0.1}	3.1±0.2	1.3 ^{+0.3} _{-0.2}	4.4
F	6.0±0.2	3.2 ^{+0.2} _{-0.1}	2.0 max.	2.2±0.2	1.3 ^{+0.3} _{-0.2}	2.9
H	3.5±0.2	2.8 ^{+0.2} _{-0.1}	1.5 max.	2.2±0.2	0.8 ^{+0.3} _{-0.2}	1.4
K	3.2±0.2	1.6 ^{+0.2} _{-0.1}	1.0 max.	1.2±0.2	0.8 ^{+0.3} _{-0.2}	1.1
P	2.05±0.2	1.35 ^{+0.2} _{-0.1}	1.5 max.	1.0±0.1	0.5 ^{+0.3} _{-0.2}	0.85
R	2.05±0.2	1.3 ^{+0.2} _{-0.1}	1.2 max.	1.0±0.1	0.5 ^{+0.3} _{-0.2}	0.85
S	3.2±0.2	1.6 ^{+0.2} _{-0.1}	1.2 max.	1.2±0.2	0.8 ^{+0.3} _{-0.2}	1.1
T	3.5±0.2	2.8 ^{+0.2} _{-0.1}	1.2 max.	2.2±0.2	0.8 ^{+0.3} _{-0.2}	1.4
W	6.0±0.2	3.2 ^{+0.2} _{-0.1}	1.5 max.	2.2±0.2	1.3 ^{+0.3} _{-0.2}	2.9
X	7.3±0.2	4.3 ^{+0.2} _{-0.1}	1.5 max.	2.4±0.2	1.3 ^{+0.3} _{-0.2}	4.4
Y	7.3±0.2	4.3 ^{+0.2} _{-0.1}	2.0 max.	2.4±0.2	1.3 ^{+0.3} _{-0.2}	4.4

Specifications

Rated Voltage (V _R) + 85°C	2.5	4	6.3	10	16	20	25	35	50	
Category Voltage (V _C) +125°C	1.7	2.7	4	7	10	13	17	23	33	
Surge Voltage (V _S)	+ 85°C	3.3	5.2	8	13	20	26	32	46	65
	+125°C	2.2	3.4	5	8	13	16	20	28	40
Operating Temperature Range	-55°C to +125°C									
Failure Rate	1%/ 1000H (85°C, Rated Voltage, 0.1Ω/ V), 60% confidence level									

Capacitance and Voltage Range

μF	V CODE	2.5	4	6.3	10	16	20	25	35	50
		e	G	J	A	C	D	E	V	T
0.10	104								A	A
0.15	154								A	A/ B
0.22	224								A	A/ B
0.33	334								A	A/ B
0.47	474							A	A/ B	A/ B/ C
0.68	684							A	A/ B	A/ B/ C
1.0	105						A	A	A/ B	A/ B/ C
1.5	155						A	A/ B	A/ B/ C	B/ C/ D
2.2	225					A	A/ B	A/ B	A/ B/ C	B/ C/ D
3.3	335					A/ B	A/ B	A/ B	B/ C	C/ D
4.7	475				A	A/ B	A/ B	A/ B	B/ C/ D	C/ D
6.8	685				A	A/ B	A/ B/ C	B/ C	C/ D	C/ D
10	106			A	A	A/ B/ C	B/ C	B/ C/ D	C/ D/ E	D/ E/ V
15	156			A	A/ B	A/ B/ C	B/ C	C/ D	C/ D	D/ E/ V
22	226			A	A/ B	B/ C/ D	B/ C/ D	C/ D	D/ E	V
33	336	A	A	A	A/ B/ C	B/ C/ D	C/ D	C/ D/ E	D/ E/ V	
47	476	A	A	A/ B/ C	B/ C	C/ D	C/ D/ E	D/ E	E/ V	
68	686	A	A/ B	B/ C	B/ C	C/ D	C/ D/ E	D/ E/ V	V	
100	107	A/ B	A/ B	B/ C	B/ C/ D	C/ D/ E	D/ E/ V	E/ V		
150	157	B	B/ C	B/ C/ D	C/ D/ E	D/ E/ V	E/ V	<u>V</u>		
220	227	B/ D	B/ C/ D	C/ D/ E	C/ D/ E	E/ V				
330	337	D	C/ D	C/ D/ E	D/ E/ V	<u>E</u>				
470	477	C/ D	C/ D/ E	D/ E/ V	E/ U/ V					
680	687	C/ D/ E	D/ E	E/ V						
1000	108	<u>D/ E</u>	D/ E/ V	<u>E/ V</u>						
1500	158	D/ E/ <u>V</u>	E/ <u>V</u>							
2200	228	<u>V</u>								

Note: Voltage ratings are minimum values. AVX reserves the right to supply higher voltage ratings in the same case size, to the same reliability standards.
Only M tolerance available for underlined parts.

Capacitance and Voltage Range (Low Profile)

μF	V CODE	2.5	4	6.3	10	16	20	25	35	50
		e	G	J	A	C	D	E	V	T
0.10	104						R/ S		R/ S	S
0.15	154						R/ S	R	R/ S	S
0.22	224						R/ S	R	R/ S	P/ R/ S
0.33	334						R/ S	R	R/ S	P/ R/ S/ T
0.47	474						R/ S	R/ S	R/ S/ T	S/ T
0.68	684					R/ S	R/ S/ T	R/ S	P/ S/ T	
1.0	105				R/ S	R/ S/ T	R/ S/ T	P/ R/ S	P/ S/ T	W
1.5	155			R/ S	R/ S	R/ S	P/ R/ S/ T	P/ S/ T	T	W
2.2	225		R/ S	R/ S	R/ S	R/ S/ T	P/ R/ S/ T	T	T	W
3.3	335		R/ S	R/ S	R/ S/ T	R/ S/ T	T	T/ W	W	Y
4.7	475	R	R/ S	R/ S/ T	R/ S/ T	K/ P/ S/ T	T	T/ W	W	Y
6.8	685	R	R/ S/ T	R/ S/ T	P/ R/ S/ T	S/ T	T	W	Y	Y
10	106	R/ S	R/ S/ T	P/ R/ S/ T	K/ P/ B/ S/ T	T/ W	W	W	X/ Y	
15	156	R	R/ S/ T	K/ P/ R/ S/ T	S/ T/ W	I/ W	W	Y	Y	
22	226	P/ R	K/ P/ R/ S/ T	K/ P/ S/ T/ W	T/ W	W	W/ Y	Y	Y	
33	336	K/ P/ S	K/ P/ S/ T/ W	T/ W	W	W/ Y	X/ Y	Y		
47	476	P/ S	T/ W	T/ W	H/ W/ Y	W/ X/ Y	X/ Y	Y		
68	686	T	T/ W	W	W/ Y	F/ X/ Y	Y			
100	107	T/ W	I/ W	W/ Y	W/ X/ Y	E/ Y				
150	157	I/ W	W/ Y	W/ X/ Y	F/ X/ Y	<u>Y</u>				
220	227	W/ Y	W/ X/ Y	F/ X/ Y	Y					
330	337	<u>W/ Y</u>	F/ X/ Y	Y						
470	477	F/ Y	Y	Y						
680	687	Y	<u>Y</u>							
1000	108	<u>Y</u>								

Note: Voltage ratings are minimum values. AVX reserves the right to supply higher voltage ratings in the same case size, to the same reliability standards.
Only M tolerance available for underlined parts.

Capacitance and Voltage Range <TPS Series>

μF	V	2.5	4	6.3	10	16	20	25	35	50
	CODE	e	G	J	A	C	D	E	V	T
0.15	154									A (9000)
0.22	224								A (6000)	A (7000)
0.33	334								A (6000)	A (7000)
0.47	474							A (7000)	A (6000) B (4000)	A (6500) B (6000) C (2300)
0.68	684							A (6000)	A (6000)	B (4000)
1.0	105				R (9000)		A (3000) R (6000) S (6000) T (2000)	A (4000) R (2500, 4000)	A (3000) B (2000)	B (3000) C (2500)
1.5	155						A (3000)	A (3000) B (1800)	A (3000) B (2500)	C (1500, 2000)
2.2	225			R (7000)	A (1800)	A (1800, 3500) T (2000)	A (3000) B (1700)	A (2500) B (900, 1200, 2500)	A (1500) B (750, 1500, 2000) C (1000)	C (1500) D (1200)
3.3	335				T (1500)	A (3500) B (2500)	A (2500) B (1300)	A (1000, 1500) B (750, 1500, 2000)	B (1000) C (700)	C (1000) D (800)
4.7	475			S (4000)	A (1400) R (3000, 5000)	A (2000) B (800, 1500)	A (1800) B (750, 1000)	B (700, 900, 1500) C (700)	B (700, 1500) C (600) D (700)	C (800) D (250, 300, 500, 700)
6.8	685			A (1800)	A (1800) T (1800)	A (1500) B (600, 1200)	A (1000) B (600, 1000) C (700)	B (700) C (500, 600, 700)	C (350) D (150, 400, 500)	D (200, 300, 500, 600)
10	106		R (3000)	A (1500) R (1000, 1500, 3000) T (1000)	A (900, 1800) B (1000) P (2000) S (900) T (1000, 2000)	A (1000) B (500, 800) C (500) T (800, 1000) W (500, 600)	B (500, 1000) C (500, 700) W (250, 500)	B (1800) C (300, 500) D (500)	C (600) D (125, 300) E (200) Y (250)	D (500) E (250, 300, 400, 500)
15	156			A (700, 1500)	A (1000) B (450, 600) T (1200)	B (500, 800) C (300, 700)	B (500) C (400, 450)	C (220, 300) D (100, 300)	C (350, 450) D (100, 300) Y (250)	E (250) V (250)
22	226			A (500, 900) B (375, 600) S (900)	A (900) B (400, 500, 700) C (300) T (800)	B (400, 600) C (150, 250, 300, 375) W (500)	B (400, 600) C (100, 150, 400) D (200, 300)	C (275, 400) D (100, 200, 300)	D (125, 200, 300, 400) E (125, 200, 300) Y (200)	
33	336			A (600) B (250, 350, 450, 600) T (800)	A (700) B (250, 425, 500, 650) C (150, 375, 500) W (350)	B (350, 500) C (100, 150, 225, 300) D (200) W (140, 175, 250, 400, 500) Y (300, 400)	C (300) D (100, 200)	C (400) D (100, 200, 300) E (100, 175, 200, 300) Y (200)	D (200, 300) E (100, 250, 300) V (200)	
47	476		A (500)	A (800) B (250, 350, 500) C (300) T (1200)	B (250, 350, 500, 650) C (200, 350) D (100) W (125, 150, 250)	C (110, 350) D (80, 100, 150, 200) W (200) X (180) Y (250)	D (75, 100, 200) E (70, 125, 150, 200, 250) X (200)	D (125, 150, 250) E (80, 100, 125) Y (250)	E (200, 250) V (150, 200)	
68	686			B (250, 350, 500) C (150, 200) W (110, 125, 250)	B (600) C (80, 100, 200, 300) D (100, 150) W (100, 150) Y (100, 200)	C (125, 200) D (70, 100, 150) F (200) X (150) Y (150, 200, 250)	D (70, 150, 200, 300) E (125, 150, 200) Y (200)	D (150, 200, 300) E (125, 200) V (80, 95, 150, 200)	V (150, 200)	
100	107	B (200)	B (200, 250, 350, 500) W (100)	B (250, 400) C (75, 150) D (300) W (100, 150) Y (100)	B (400) C (75, 100, 150, 200) D (60, 85, 80, 100, 125, 150) E (125) W (150) X (85, 150, 200) Y (100, 150, 200)	C (200) D (60, 100, 125, 150) E (55, 100, 125, 150) F (150, 200) Y (100, 150, 200)	D (85, 100, 150) E (100, 150, 200) V (60, 85, 100, 200)	E (150) V (100)		
150	157	B (150)	B (250) C (70, 80)	C (50, 90, 150, 200, 250) D (50, 125) Y (40, 50)	C (150) D (50, 85, 100) E (100) F (200) X (100) Y (100, 150, 200)	C (60, 85, 100, 125, 150) E (100) V (45, 75) Y (200)	V (80)	V (150)		
220	227	B (150, 200, 600) D (45)	D (40, 50, 100) Y (40, 50, 75)	C (70, 100, 125, 250) D (50, 100, 125) E (100) F (200) Y (100, 150)	D (40, 50, 100, 150) E (50, 60, 70, 100, 125, 150) Y (100, 150, 200)	E (100, 150) V (50, 75, 100, 150)				
330	337	Y (40)	C (100) D (35, 45, 100) F (200) X (100)	C (80, 100) D (45, 50, 70, 100) E (50, 100, 125, 150) V (100) Y (75, 100, 150)	D (50, 65, 100, 150) E (40, 50, 60, 100) V (40, 60, 100)	E (200)				
470	477	D (35) F (200) Y (100)	D (45, 100) E (35, 45, 100)	D (45, 60, 100, 200) E (45, 50, 60, 100, 200) V (40, 55, 100) Y (150)	E (45, 50, 60, 100, 200) V (40, 60, 100)					
680	687	D (35, 50) E (35, 50) Y (100)	D (45, 60, 100) E (40, 60, 100)	E (45, 60, 100) V (35, 40, 50)						
1000	108	E (30, 40) Y (100)	E (40, 60) V (25, 35, 40, 50)	E (100) V (40, 50)						
1500	158	D (100) E (50) V (30, 40)	E (50, 75) V (50, 75)							

Note: Voltage ratings are minimum values. AVX reserves the right to supply higher voltage ratings in the same case size, to the same reliability standards.

Only M tolerance available for underlined parts.

Capacitance and Voltage Range <TPM Series>

μ F \ V	V	2.5	4	6.3	10	16	20	25	35	50
	CODE	e	G	J	A	C	D	E	V	T
10	106									D (140) E (120)
15	156									E (75, 100)
22	226								D (70) E (60, 100)	E (75, 100)
33	336							D (65)	E (50, 65)	
47	476					D (100)	D (45, 55)	D (55) E (65)	E (55, 65)	
68	686					D (40, 50)		E (45, 55)		
100	107				<u>Y (45)</u>	D (40, 50)	E (35, 45)			
150	157				<u>Y (45)</u>	E (30, 40)	E (35)			
220	227			<u>Y (30)</u>	D (35)	E (25, 40)				
330	337		D (25, 35)	D (25, 35)	D (35) E (23, 35)					
470	477		D (25, 35)	D (30) E (18, 23, 30)	E (23, 30)					
680	687		D (25) E (18, 23)	E (18, 23) V (23)						
1000	108	D (25)	D (25, 45) E (18, 23) V (18)	<u>E (25)</u> <u>V (20)</u>						
1500	158	E (12, 15, 18)	E (15, 18)							
2200	228	<u>E (18)</u>								

Note: Voltage ratings are minimum values. AVX reserves the right to supply higher voltage ratings in the same case size, to the same reliability standards.
Only M tolerance available for underlined parts.




Tantalum Capacitors Niobium Oxide Capacitors (OxiCap®) Packaging



• Reel

(Unit: mm)

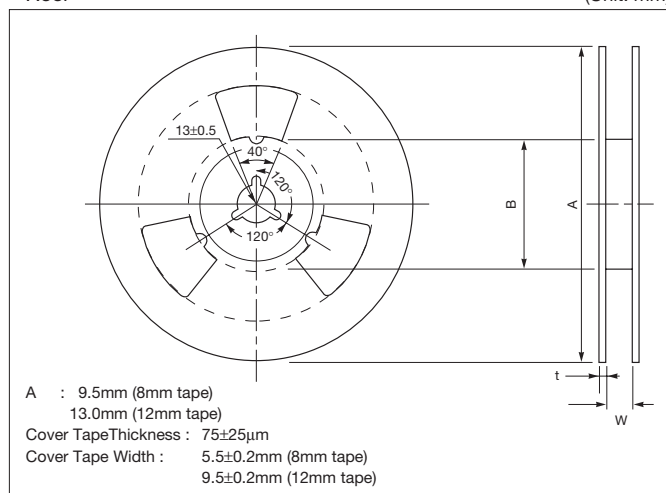

Reel Size	Tape width (mm)	A	B	C	W	t
180mm (7")	12	180±2.00	50 min.	13.0±0.50	12.4±1.5/-0	2.0±0.50
180mm (7")	8	180±2.00	50 min.	13.0±0.50	8.4±1.5/-0	2.0±0.50


• Taping

Series	Case Size	Tape Width (mm)	P (mm)	7" Reel (pcs.)
TAJ TPS TPM TCJ TRJ THJ TRM TCN TCM NOJ NOS NOM	A	8	4	2000
	B	8	4	2000
	C	12	8	500
	D	12	8	500
	E	12	8	400
	U	16	8	400
	V	12	8	400
	F	12	8	1000
	G	8	4	2500
	H	8	4	2500
	K	8	4	3000
	L	8	4	2500
	N	8	4	3000
	P	8	4	2500
	R	8	4	2500
	S	8	4	2500
	T	8	4	2500
	W	12	8	1000
	X	12	8	1000
	Y	12	8	1000

• Moisture Sensitive Level (MSL)

Series	MSL
TAJ TPS THJ	1
TRJ	• For U case size : 3 • For case sizes other than the above : 1
NOJ	• For D, E, V, X and Y case sizes : 3 • For case sizes other than the above : 1 (MSL = 3 only for Low ESR)

• Carrier Tape

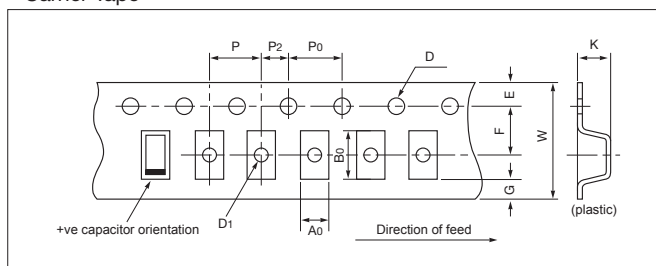

Tape dimensions comply to EIA 481 A.

Dimensions A0 and B0 of the pocket and the tape thickness, K, are dependent on the components size.

Tape material do not affect component solderability during storage.

Carrier tape thickness < 0.4mm

For 16mm tape and 24mm tape, please contact factory.

(Unit: mm)

Code	8mm tape	12mm tape
P	4±0.1	8±0.1
G	0.75 min.	0.75 min.
F	3.5±0.05	5.5±0.05
E	1.75±0.1	1.75±0.1
W	8±0.3	12±0.3
P2	2±0.05	2±0.05
P0	4±0.1	4±0.1
D	1.5 ^{+0.2} _{-0.0}	1.5 ^{+0.2} _{-0.0}
D1	1.0 min.	1.5 min.


• Carrier Tape

(Unit: mm)

Series	Case Size	A0	B0	K
TAJ TPS TPM TCJ TRJ THJ TRM TCN TCM NOJ NOS NOM	A	1.83±0.1	3.57±0.1	1.87±0.1
	B	3.15±0.1	3.77±0.1	2.22±0.1
	C	3.45±0.1	6.4±0.1	2.92±0.1
	D	4.48±0.1	7.62±0.1	3.22±0.1
	E	4.5±0.1	7.5±0.1	4.5±0.1
	U	6.19±0.1	7.66±0.1	4.72±0.1
	V	6.43±0.1	7.44±0.1	3.84±0.1
	F	3.35±0.1	6.4±0.1	2.2±0.1
	G	1.83±0.1	3.57±0.1	1.65±0.1
	H	3.15±0.1	3.77±0.1	1.66±0.1
	K	1.95±0.1	3.55±0.1	1.15±0.1
	L	3.10±0.1	3.80±0.1	1.30±0.1
	N	1.60±0.1	2.30±0.1	1.10±0.1
	P	1.65±0.1	2.45±0.1	1.6±0.1
	R	1.65±0.1	2.45±0.1	1.3±0.1
	S	1.95±0.1	3.55±0.1	1.3±0.1
	T	3.2±0.1	3.8±0.1	1.3±0.1
	W	3.57±0.1	6.4±0.1	1.65±0.1
	X	4.67±0.1	7.62±0.1	1.65±0.1
	Y	4.67±0.1	7.62±0.1	2.15±0.1



Recommended Land Pattern

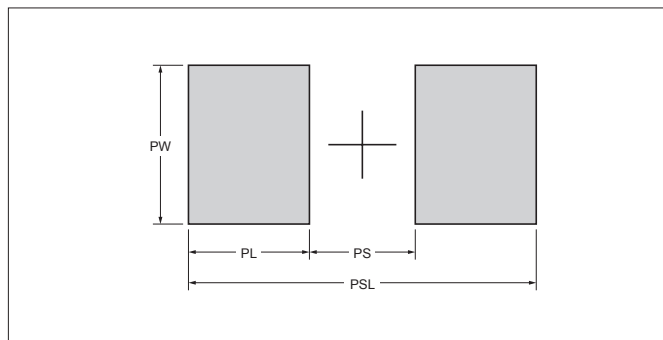


(Unit: mm)

Series	Case Size	PSL	PL	PS	PW
TAJ TPS TPM TCJ TRJ THJ TRM TCM NOJ NOS NOM	A	4.00	1.40	1.20	1.80
	B	4.00	1.40	1.20	2.80
	C	6.50	2.00	2.50	2.80
	D	8.00	2.00	4.00	3.00
	E	8.00	2.00	4.00	3.00
	U	8.00	2.00	4.00	3.70
	V	8.00	2.00	4.00	3.70
	F	6.50	2.00	2.50	2.80
	G	4.00	1.40	1.20	1.80
	H	4.00	1.40	1.20	2.80
	K	4.00	1.40	1.20	1.80
	N	2.70	0.95	0.80	1.60
	P	2.70	0.95	0.80	1.60
	R	2.70	0.95	0.80	1.60
	S	4.00	1.40	1.20	1.80
	T	4.00	1.40	1.20	2.80
TCN	W	6.50	2.00	2.50	2.80
	X	8.00	2.00	4.00	3.00
	Y	8.00	2.00	4.00	3.00
	K	4.00	1.40	1.20	1.80
	L	3.50	1.15	1.20	2.40
	S	3.50	1.15	1.20	1.20
	T	3.50	1.15	1.20	2.40
	X	7.20	1.50	4.20	2.50

Recommended Reflow Profile for Lead-Free Product

Allowable range of peak temp./ time combination for IR reflow

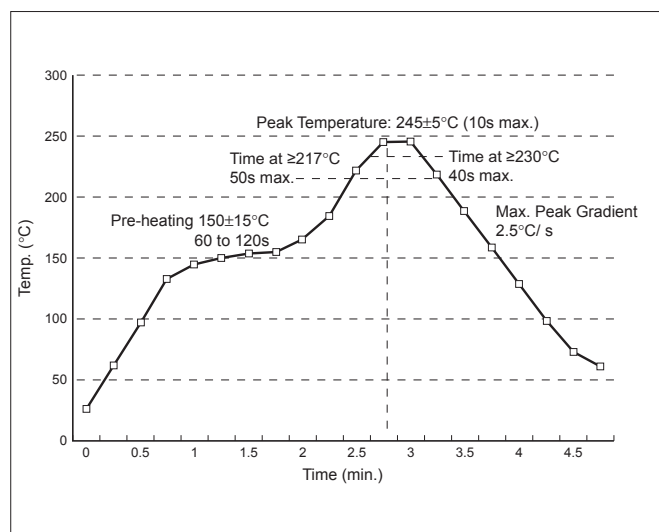

Please contact us for Lead-Free Products.

Manual Soldering Using Soldering Iron

Item	Condition
Max. Tip Temperature	370°C max.
Max. Exposure Time	3 sec. max.

Technical Summary

1. Voltage Derating

We can offer to use AVX software "Select-a-Cap" to select a part number for safety use.

2. Surge Current

As a general rule of thumb, the maximum current a tantalum capacitor can withstand is given by the following equation.

$$I_{max} = V_{rated} / (0.45 + \text{Catalog ESR})$$

So for example for TAJD226M035 (Catalog ESR = 0.9 Ohms)

This would be :

$$I_{max} = 35 / (0.45 + 0.9) \div 25.9A$$

3. If more aggressive mounting techniques are to be used, please contact AVX Tantalum for guidance.

4. Reverse Voltage

The values quoted are not intended to cover continuous reverse operation.

The peak reverse voltage applied to the capacitor must not exceed.

- 10% of rated DC voltage to a maximum of 1V at 25°C.
- 3% of rated DC voltage to a maximum of 0.5V at 85°C.
- 1% of rated DC voltage to a maximum of 0.1V at 105°C.
- 1% of category DC voltage to a maximum of 0.1V at 125°C.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

TPSB227M002Y0600	TPSB106K016Y0800	TPSA475K010Y1400	TPSE226M035Y0200	TPSE476K025Y0125
TPSE686K020Y0150	TPST106K010Y2000	TPSV107M025Y0100	TPSY157M010Y0200	TPSE226K035Y0200
TPSE227K016Y0100	TPSA106K010Y1800	TPSB226K016Y0600	TPSE107K020Y0150	TPSE107M016Y0100
TPSE107M016Y0125	TPSE107M016Y0150	TPSE107M020Y0200	TPSE226M035Y0300	TPSE227K010Y0100
TPSE227M010Y0100	TPSE337K006Y0100	TPSE337K010Y0040	TPSV158M002Y0030	TPSV337K010Y0100
TPSV686K025Y0150	TPSW107M010Y0150	TPSW336M016Y0400	TPSW686K006Y0125	TPSW686K006Y0250
TPSY107K010Y0200	TPSY227M010Y0150	TPSA105K035Y3000	TPSA224K035Y6000	TPSA225K010Y1800
TPSA335K016Y3500	TPSA474K025Y7000	TPSA684K035Y6000	TPSA685K010Y1800	TPSB106K020Y0500
TPSB106K020Y1000	TPSB106M020Y1000	TPSB157M004Y0250	TPSB226K010Y0400	TPSB226K010Y0700
TPSB475K035Y1500	TPSB475M025Y1500	TPSB476M006Y0250	TPSB476M010Y0500	TPSB686M006Y0500
TPSE106M050Y0400	TPSE107K016Y0100	TPSE107K016Y0125	TPSE108M004Y0060	TPSE226K035Y0300
TPSE227M016Y0100	TPSE337K010Y0100	TPSE337M006Y0100	TPSE337M010Y0100	TPSE476M035Y0200
TPSE477K010Y0045	TPSE477M010Y0050	TPSE477M010Y0100	TPSR106K006Y3000	TPSV107M020Y0060
TPSV107M020Y0085	TPSV227M016Y0050	TPSV337M010Y0060	TPSV337M010Y0100	TPSA225M010Y1800
TPSA225M016Y1800	TPSA226M006Y0500	TPSE227K016Y0150	TPSY157K006Y0050	TPSY157K010Y0150
TPSY157M006Y0050				