


SPECIFICATIONS				
CONTACT CARRIER MATERIAL	TPU			
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED			
RATED CURRENT [A]	10.0 A			
RATED VOLTAGE [V]	600 V			
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS	3x16 AWG			
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67			

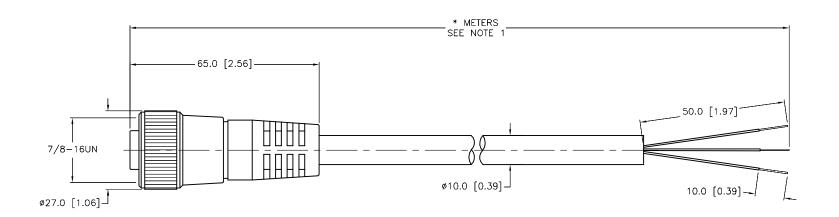

· · · · · · · · · · · · · · · · · · ·					
CABLE LENGTH	TOLERANCE *				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE *				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNLESS OTHERWISE SPECIFIED					

NOTEC

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

D	UPDATE CABLE O.D.	RDS	01/14/15	47541
REV	DESCRIPTION	BY	DATE	ECO NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	Sensors and Automation Controls	3000 CAMPUS MINNEAPOLIS, MN 1-800-544- (763) 553-7 (763) 553-0 turck.com	1 55441 7769 300 708 fax
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS	DRFT RDS	DATE 01/04/06 SCALE 1=1.3	RKV 35-*M		
FINISH	DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		rev D
	INFORMATION	DO NOT SCALE THIS DRAWING		FILE: 777012340	SHEET	1 OF 1