

TWA Series



COTS-Plus Wet Electrolytic Tantalum Capacitor




The TWA series is an axial leaded wet electrolytic tantalum capacitor with a unique cathode system that promotes very high CV (Capacitance/Voltage) per cc in traditional MIL-PRF-39006 case sizes.

The series also utilizes a welded tantalum can and header assembly to provide a hermetic seal and subsequent long operating lifetime.

The construction is similar to DSCC 93026 with capability of meeting harsh shock and vibration conditions.

OUTLINE DIMENSIONS

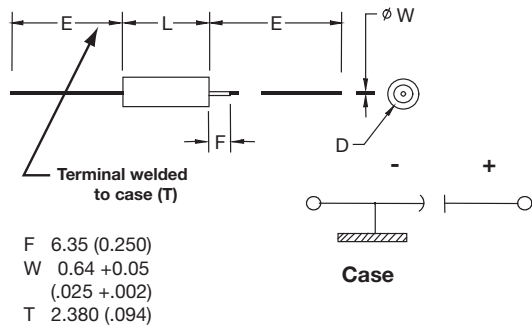

CASE DIMENSIONS: millimeters (inches)

DSCC Case Size	AVX Case Size	L +0.79 (0.031) -0.41 (0.016)	D Without Insulating Sleeve ±0.41 (0.016)	D With Insulating Sleeve Max	E ±6.35 (0.250)
T1	A	11.51 (0.453)	4.78 (0.188)	5.56 (0.219)	38.10 (1.500)
T2	B	16.28 (0.641)	7.14 (0.281)	7.92 (0.312)	57.15 (2.250)
T3	D	19.46 (0.766)	9.52 (0.375)	10.31 (0.406)	57.15 (2.250)
T4	E	26.97 (1.062)	9.52 (0.375)	10.31 (0.406)	57.15 (2.250)

VOLTAGE RATINGS (Operating Temperature -55°C to 125°C)

Voltage (DC)									
Rated Voltage: (V _R)	85°C	15	25	30	50	60	75	100	125
Derated Voltage: (V _C)	125°C	10	15	20	30	40	50	65	85
Surge Voltage: (V _S)	85°C	17.3	28.8	34.5	57.5	69	86.3	115	144

TWA Series



COTS-Plus Wet Electrolytic Tantalum Capacitor

HOW TO ORDER

AVX PART NUMBER:

TWA	E	407	*	100	□	B	S	Z	0	^	00
Type	Case Size	Capacitance Code	Capacitance Tolerance	Voltage Code	Insulation Sleeve	Packaging	Qualification	Reliability	Qualification Level	Termination Finish	Custom Test Options
		pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)	K = ±10% M = ±20%		C = Without Sleeve S = With Sleeve	B = Tray Pack	E = Extended range S = COTS+ L = Group A	Z = Non-ER	0 = N/A	0 = Sn/Pb 60/40 7 = Matte tin	00 = Standard 01 = Random vibration*



For RoHS compliant products, please select correct termination style.

* Please contact the factory for additional details and availability.

RIPPLE CURRENT MULTIPLIERS vs. Frequency, temperature and applied voltage^{1/ 2/}

Frequency of Applied Ripple Current		120Hz				800Hz				1kHz			
Ambient Still Air Temperature (°C)		≤55	85	105	125	≤55	85	105	125	≤55	85	105	125
% of	100%	0.60	0.39	—	—	0.71	0.43	—	—	0.72	0.45	—	—
85°C	90%	0.60	0.46	—	—	0.71	0.55	—	—	0.72	0.55	—	—
Rated	80%	0.60	0.52	0.35	—	0.71	0.62	0.42	—	0.72	0.62	0.42	—
Peak	70%	0.60	0.58	0.44	—	0.71	0.69	0.52	—	0.72	0.70	0.52	—
Voltage	66-2/3%	0.60	0.60	0.46	0.27	0.71	0.71	0.55	0.32	0.72	0.72	0.55	0.32

Frequency of Applied Ripple Current		10kHz				40kHz				100kHz			
Ambient Still Air Temperature (°C)		≤55	85	105	125	≤55	85	105	125	≤55	85	105	125
% of	100%	0.88	0.55	—	—	1.00	0.63	—	—	1.10	0.69	—	—
85°C	90%	0.88	0.67	—	—	1.00	0.77	—	—	1.10	0.85	—	—
Rated	80%	0.88	0.76	0.52	—	1.00	0.87	0.59	—	1.10	0.96	0.65	—
Peak	70%	0.88	0.85	0.64	—	1.00	0.97	0.73	—	1.10	1.07	0.80	—
Voltage	66-2/3%	0.88	0.88	0.68	0.40	1.00	1.00	0.77	0.45	1.10	1.10	0.85	0.50

1/ At 125°C the rated voltage of the capacitors decreases to 66 2/3 of the 85°C rated voltage.

2/ The peak of the applied ac ripple voltage plus the applied dc voltage must not exceed the dc voltage rating of the capacitors.

COTS-Plus Wet Electrolytic Tantalum Capacitor

CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Rated Voltage DC (V_R) to 85°C							
μF	Code	15V	25V	30V	50V	60V	75V	100V	125V
10	106				A*				A
15	156							A	
22	226		A*			A*	A*		
33	336						A		
47	476				A*,B	A			B
68	686		A		A			B	
100	107			A		B	B		D
110	117						B		
120	127		A		A*,B				D
150	157				B	B	D*	D	E
220	227			B	B	D*	D*,E	D,E	E
270	277		B						
330	337		B	D*	D*,E	E*	D,E	E	
390	397	D				D			
400	407							E	
470	477			B,D*	D,E		E	E ^(M)	
560	567		B,D*	D*		E			
680	687		D*,E	D,E	E	E	E		
750	757		D,E	D,E	E	E	E	E	
1000	108		D,E	D,E	D,E	E	E		
1200	128		D		E				
1500	158		E	E					
1800	188		E						
2200	228		E			E ^(M)			
3000	308				E				
4700	478		E						
5600	568		E*						

Available Ratings ^(M tolerance only)

Engineering samples - please contact manufacturer

*Codes under development

COTS-Plus Wet Electrolytic Tantalum Capacitor

RATINGS & PART NUMBER REFERENCE

AVX Part Number	Cap (µF) 25°C at 120Hz	DC Rated Voltage (V) at 85°C	ESR Max (Ohms) at 120Hz	DC Leakage max (µA)		Impedance max (Ohms)	Maximum Capacitance Change (%)			AC Ripple (mA rms)	Case Size	
				+25°C	+85 & +125°C	-55°C at 120Hz	-55°C	+85°C	+125°C	85°C at 40kHz	AVX	DSCC
15 VDC at 85°C 10 VDC at 125°C												
TWAD397*015□BSZ0^00	390	15	1.7	7	28	48	-70	25	25	1396	D	T3
25 VDC at 85°C 15 VDC at 125°C												
TWAA686*025□BEZ0^00	68	25	2.5	0.6	3	45	-40	12	15	850	A	T1
TWAA127*025□BSZ0000	120	25	1.3	1	5	25	-42	8	12	1250	A	T1
TWAA127*025□BEZ0^00*	120	25	2.3	2	10	35	-42	20	25	1250	A	T1
TWAB277*025□BEZ0^00	270	25	0.9	4	20	17.5	-50	8	15	1800	B	T2
TWAB337*025□BEZ0^00	330	25	1.3	2	20	25	-60	10	15	1550	B	T2
TWAB567*025□BSZ0^00	560	25	0.83	2	10	12	-65	10	15	2100	B	T2
TWAE687*025□BEZ0^00	680	25	0.75	3	12	12	-50	8	15	2100	E	T4
TWAD757*025□BSZ0^00	750	25	1	3	25	15	-50	8	15	2000	D	T3
TWAE757*025□BEZ0^00	750	25	0.75	3.5	16	9	-55	10	18	2200	E	T4
TWAD108*025□BEZ0^00	1000	25	1	4	30	15	-50	8	15	2300	D	T3
TWAE108*025□BEZ0^00	1000	25	0.7	4	20	9	-55	10	18	2400	E	T4
TWAD128*025□BSZ0000	1200	25	0.65	5	20	7	-70	12	18	2600	D	T3
TWAD128*025□BEZ0^00*	1200	25	1.4	7	35	12	-85	40	50	2600	D	T3
TWAE158*025□BEZ0^00	1500	25	0.5	6	24	7	-65	15	20	2850	E	T4
TWAE188*025□BSZ0000	1800	25	0.5	6	25	7	-75	12	20	3100	E	T4
TWAE228*025□BSZ0000	2200	25	0.5	10	80	10	-90	30	50	3200	E	T4
TWAE478*025□BSZ0^00	4700	25	0.5	30	180	5	-90	60	80	4250	E	T4
TWAE478*025□BEZ0^00*	4700	25	0.5	30	180	5	-90	60	80	4250	E	T4
30 VDC at 85°C 20 VDC at 125°C												
TWAA107*030□BSZ0000	100	30	1.3	1	5	25	-38	8	12	1200	A	T1
TWAA107*030□BEZ0^00*	100	30	2.3	2	10	35	-38	20	25	1200	A	T1
TWAB227*030□BEZ0^00	220	30	2	1.9	10	40	-40	8	15	1200	B	T2
TWAB477*030□BSZ0^00	470	30	0.85	2	10	15	-65	10	18	1800	B	T2
TWAD687*030□BEZ0^00	680	30	1	3.3	25	15	-50	8	15	1900	D	T3
TWAE687*030□BEZ0^00	680	30	0.8	4.5	18	10	-60	8	15	2100	E	T4
TWAD757*030□BEZ0^00	750	30	1	3.6	30	15	-50	8	15	2000	D	T3
TWAE757*030□BEZ0^00	750	30	0.8	5	20	10	-65	10	18	2200	E	T4
TWAD108*030□BSZ0000	1000	30	0.7	7	25	7	-70	10	18	2500	D	T3
TWAD108*030□BEZ0^00*	1000	30	1.4	10	50	12	-85	40	50	2500	D	T3
TWAE108*030□BEZ0^00	1000	30	0.7	5	20	7	-70	10	18	2500	E	T4
TWAE158*030□BSZ0000	1500	30	0.6	12	35	6	-72	10	20	3000	E	T4
50 VDC at 85°C 30 VDC at 125°C												
TWAB476*050□BSZ0^00	47	50	3	0.8	8	70	-28	13	15	1155	B	T2
TWAA686*050□BSZ0000	68	50	1.5	1	5	35	-25	8	15	1050	A	T1
TWAA686*050□BEZ0^00*	68	50	2.5	2	10	45	-25	20	25	1050	A	T1
TWAB127*050□BEZ0^00	120	50	2	2	10	40	-45	8	15	1200	B	T2
TWAB157*050□BEZ0^00	150	50	2	2	10	25	-50	8	15	1400	B	T2
TWAB227*050□BSZ0000	220	50	0.9	2	10	17.5	-50	8	15	1800	B	T2
TWAB227*050□BEZ0^00*	220	50	0.9	4	20	17.5	-50	8	15	1800	B	T2
TWAE337*050□BEZ0^00	330	50	0.8	2.5	25	15	-50	8	15	1900	E	T4
TWAD477*050□BSZ0000	470	50	0.75	3	25	10	-50	8	15	2100	D	T3
TWAD477*050□BEZ0^00*	470	50	1	3	25	11	-50	8	15	2100	D	T3
TWAE477*050□BEZ0^00	470	50	0.75	3	30	10	-50	8	15	2200	E	T4
TWAE687*050□BSZ0000	680	50	0.7	5	40	8	-58	10	20	2750	E	T4
TWAE687*050□BEZ0^00*	680	50	0.7	5	40	8	-58	10	20	2750	E	T4
TWAE757*050□BEZ0^00	750	50	0.6	12	60	8	-50	15	20	2800	E	T4
TWAD108*050□BEZ0^00	1000	50	1.5	20	125	12	-90	100	140	2500	D	T3
TWAE108*050□BSZ0^00	1000	50	1.0	12	90	20	-90	30	50	3200	E	T4
TWAE108*050□BEZ0^00*	1000	50	0.7	11	110	20	-70	30	40	3200	E	T4
TWAE128*050□BSZ0^00	1200	50	1.0	12	90	20	-90	30	50	3200	E	T4
TWAE308*050□BSZ0^00	3000	50	0.3	30	150	3.5	-80	60	85	3100	E	T4
TWAE308*050□BEZ0^00*	3000	50	0.3	30	150	3.5	-80	60	85	3100	E	T4
60 VDC at 85°C 40 VDC at 125°C												
TWAA476*060□BSZ0000	47	60	2	1	5	44	-25	8	12	1050	A	T1
TWAA476*060□BEZ0^00*	47	60	2	2	10	55	-25	15	25	1050	A	T1
TWAB107*060□BEZ0^00	100	60	2.5	1.7	10	40	-40	8	15	1100	B	T2
TWAB157*060□BSZ0000	150	60	1.1	2	10	20	-40	8	15	1650	B	T2
TWAB157*060□BEZ0^00*	150	60	1.5	2	10	30	-35	12	20	1650	B	T2
TWAD397*060□BSZ0000	390	60	0.9	3	25	15	-60	8	15	2100	D	T3
TWAD397*060□BEZ0^00*	390	60	0.9	3	25	15	-60	8	15	2100	D	T3
TWAE567*060□BSZ0000	560	60	0.8	5	40	10	-58	8	15	2750	E	T4
TWAE567*060□BEZ0^00*	560	60	0.8	5	40	10	-58	8	15	2750	E	T4
TWAE687*060□BEZ0^00	680	60	0.6	13	65	8	-50	15	20	2800	E	T4

COTS-Plus Wet Electrolytic Tantalum Capacitor

RATINGS & PART NUMBER REFERENCE

AVX Part Number	Cap (μF) 25°C at 120Hz	DC Rated Voltage (V) at 85°C	ESR Max (Ohms) at 120Hz	DC Leakage max (μA)		Impedance max (Ohms) -55°C at 120Hz	Maximum Capacitance Change (%)			AC Ripple (mA rms) 85°C at 40kHz	Case Size	
				+25°C	+85 & +125°C		-55°C	+85°C	+125°C		AVX	DSCC
TWAE757*060□BEZ0^00	750	60	0.6	15	75	8	-50	15	20	2800	E	T4
TWAE108*060□BSZ0000	1000	60	1	12	90	20	-90	30	50	3200	E	T4
TWAE108*060□BEZ0^00*	1000	60	0.5	20	60	4.5	-70	30	60	3200	E	T4
TWAE228*060□BEZ0^00	2200	60	0.5	40	120	3.0	-80	60	80	3000	E	T4
75 VDC at 85°C 50 VDC at 125°C												
TWAA336*075□BSZ0000	33	75	2.5	1	5	66	-25	5	9	1050	A	T1
TWAA336*075□BEZ0^00*	33	75	2.5	2	10	70	-25	15	25	1050	A	T1
TWAB107*075□BEZ0^00	100	75	2.5	2	10	40	-35	6	10	1400	B	T2
TWAB117*075□BSZ0000	110	75	1.3	2	10	24	-35	6	10	1650	B	T2
TWAB117*075□BEZ0^00*	110	75	1.5	2	10	30	-35	12	20	1650	B	T2
TWAE227*075□BEZ0^00	220	75	1.1	2.5	30	20	-50	6	10	1800	E	T4
TWAD337*075□BSZ0000	330	75	1	3	30	12	-45	6	10	2100	D	T3
TWAD337*075□BEZ0^00*	330	75	1.2	3	30	15	-60	10	20	2100	D	T3
TWAE337*075□BEZ0^00	330	75	1	3	40	12	-50	6	10	2200	E	T4
TWAE477*075□BSZ0000	470	75	0.9	5	50	12	-55	6	10	2750	E	T4
TWAE477*075□BEZ0^00*	470	75	0.9	5	50	12	-55	6	10	2750	E	T4
TWAE687*075□BEZ0^00	680	75	0.9	11	110	10	-70	30	40	2750	E	T4
TWAE757*075□BEZ0^00	750	75	0.7	12	120	10	-70	30	40	3800	E	T4
TWAE108*075□BEZ0^00	1000	75	0.5	30	90	4.5	-70	30	60	3500	E	T4
100 VDC at 85°C 65 VDC at 125°C												
TWAA156*100□BSZ0000	15	100	3.5	1	5	125	-18	3	10	1050	A	T1
TWAB686*100□BSZ0000	68	100	2.1	2	10	37	-30	4	12	1650	B	T2
TWAB686*100□BEZ0^00*	68	100	2.5	2	10	37	-30	4	12	1650	B	T2
TWAD157*100□BSZ0000	150	100	1.6	3	25	22	-35	6	12	2100	D	T3
TWAD157*100□BEZ0^00*	150	100	1.6	3	25	22	-35	6	12	2100	D	T3
TWAD227*100□BEZ0^00	220	100	1.4	5	25	18	-50	10	15	2500	D	T3
TWAE227*100□BSZ0000	220	100	1.2	5	50	15	-40	6	12	2750	E	T4
TWAE227*100□BEZ0^00*	220	100	1.2	5	50	15	-40	6	12	2750	E	T4
TWAE337*100□BSZ0^00	330	100	0.8	6	60	10	-45	7	20	3600	E	T4
TWAE337*100□BEZ0^00*	330	100	0.8	6	60	10	-45	7	20	3600	E	T4
TWAE407*100□BSZ0^00	400	100	0.8	10	150	10	-50	10	35	4100	E	T4
TWAE407*100□BEZ0^00*	400	100	0.8	10	150	10	-50	10	35	4100	E	T4
TWAE477M100□BEZ0^00	470	100	0.7	25	250	10	-50	10	35	4100	E	T4
TWAE757*100□BEZ0^00	750	100	0.6	30	150	5	-60	30	80	6700	E	T4
125 VDC at 85°C 85 VDC at 125°C												
TWAA106*125□BSZ0000	10	125	5.5	1	5	175	-15	3	10	1050	A	T1
TWAB476*125□BSZ0000	47	125	2.3	2	10	47	-25	5	12	1650	B	T2
TWAB476*125□BEZ0^00*	47	125	2.3	2	10	47	-25	5	12	1650	B	T2
TWAD107*125□BSZ0000	100	125	1.8	3	25	35	-35	5	12	2100	D	T3
TWAD107*125□BEZ0^00*	100	125	1.8	3	25	35	-35	5	12	2100	D	T3
TWAD127*125□BEZ0^00	120	125	1.8	3	25	35	-35	5	12	2100	D	T3
TWAE157*125□BSZ0000	150	125	1.6	5	50	20	-35	6	12	2750	E	T4
TWAE157*125□BEZ0^00*	150	125	1.6	5	50	20	-35	6	16	2750	E	T4
TWAE227*125□BEZ0^00	220	125	1.4	10	50	12	-40	8	15	3600	E	T4

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2V.
DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the rights to supply higher voltage rating in the same case size, to the same reliability standards.

*Not recommended for new designs, for new design use part number with Inspection level "S" – COTS-Plus

$$DF = 2\pi fC \times (ESR)$$

$$2\pi = 6.28$$

$$f = 120\text{Hz}$$

C = Actual measured capacitance

ESR = Actual measured ESR

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

TWAE108K060CBSZ0000	TWAE687K050CBSZ0000	TWAA156K100CBSZ0000	TWAB227K050CBSZ0000
TWAD107K125CBSZ0000	TWAB567K025CBSZ0000	TWAA476K060CBSZ0000	TWAE157K125CBSZ0000
TWAB157K060CBSZ0000	TWAD108K030CBSZ0000	TWAB477K030CBSZ0000	TWAE228K025CBSZ0000
TWAE158K030CBSZ0000	TWAD477K050CBSZ0000	TWAE227K100CBSZ0000	TWAB117K075CBSZ0000
TWAB686K100CBSZ0000	TWAB476K125CBSZ0000	TWAD157K100CBSZ0000	TWAD128K025CBSZ0000
TWAD337K075CBSZ0000	TWAE567K060CBSZ0000	TWAA686K050CBSZ0000	TWAE188K025CBSZ0000
TWAE477K075CBSZ0000	TWAA336K075CBSZ0000	TWAD397K060CBSZ0000	TWAA106K125CBSZ0000
TWAA107K030CBSZ0000	TWAA127K025CBSZ0000	TWAE687K050CBDZ0000	TWAE227K100CBDZ0000
TWAD157K100CBDZ0000	TWAB157K060SBDZ0000	TWAA476K060SBDZ0000	TWAE567K060CBDZ0000
TWAA127K025CBDZ0000	TWAA686K050SBDZ0000	TWAB476K125CBDZ0000	TWAE477K075CBDZ0000
TWAE157K125SBDZ0000	TWAD337K075CBDZ0000	TWAE157K125CBDZ0000	TWAB117K075CBDZ0000
TWAB567K025SBDZ0000	TWAB227K050CBDZ0000	TWAE157M125CBSZ0000	TWAE158K050CBSZ0000
TWAE567K060SBDZ0000	TWAA336K075SBDZ0000	TWAE477K075SBDZ0000	TWAA107K030SBDZ0000
TWAA336K075SBSZ0000	TWAA336M075SBDZ0000	TWAA686M050SBDZ0000	TWAB157K060SBSZ0000
TWAB227M050SBDZ0000	TWAB476K125SBDZ0000	TWAB686K100SBDZ0000	TWAD107K125SBSZ0000
TWAD108K030SBDZ0000	TWAD337M075SBDZ0000	TWAD397K060SBDZ0000	TWAD397K060SBSZ0000
TWAE108K050SBSZ0000	TWAE108K060SBDZ0000	TWAE108M060CTSZ0000	TWAE109K010SBSZ0000
TWAE157M125SBDZ0000	TWAE158K030SBDZ0000	TWAE227M100SBSZ0000	TWAE477K075SBSZ0000
TWAE687K050SBDZ0000	TWAE227M100SBDZ0000	TWAD477M050SBDZ0000	TWAB117K075SBDZ0000
TWAB227K050SBDZ0000	TWAD107K125SBDZ0000	TWAD128K025SBDZ0000	TWAD157K100SBDZ0000
TWAD337K075SBDZ0000	TWAD477K050SBDZ0000	TWAE227K100SBDZ0000	TWAE108K060SBSZ0000
TWAB117M075CBSZ0000	TWAB686M100CBSZ0000	TWAD108M060CBSZ0000	TWAD397M060CBSZ0000
TWAE108M060CBSZ0000	TWAE228M025CBSZ0000	TWAE687M050CBSZ0000	TWAD337M075CBSZ0000
TWAB157M060CBSZ0000	TWAB567M025CBSZ0000	TWAD157M100CBSZ0000	TWAE128K050CBSZ0000
TWAA106M125CBSZ0000	TWAA476M060CBSZ0000	TWAB476M125CBSZ0000	TWAE757K075SBSZ0000