




Metal Oxide Power Resistors (RoHS Compliant) MO-RC Series


FEATURES

- Temperature Range: -55°C ~ +235°C (derated over 70°C)
- ±5% tolerance
- Excellent flame retardant coating
- Stable performance in diverse environments
- High purity ceramic core
- Other values may be available on request

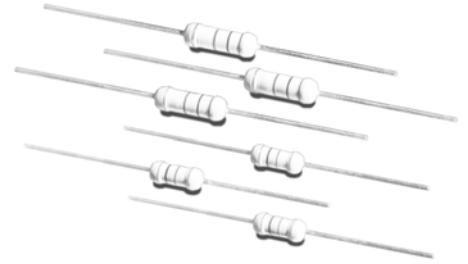

Environmental Commitment

DERATING CURVE

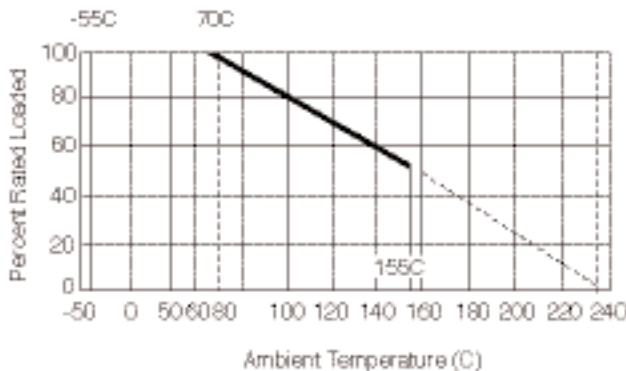

Suffix Code:	Package:
(blank)	Bulk
REEL	Tape and Reel

PART NUMBERING SYSTEM



SERIES, SIZE, WATTAGE, RANGE OF VALUES, VOLTAGE, AND DIMENSIONS



Series	Case Size	Watts (W)	Standard Range of Values	Voltage (V) (max.) @ 70°C			Dimensions (mm)			
				Working	Overload	Withstanding	L (max.)	D (max.)	H ±3	d, ±.05
281	Small	1	0.1 ~ 1.0M	350	600	350	10	3.5	28	0.54
282	Small	2	0.1 ~ 1.0M	350	600	350	12	5	25	0.7
283	Small	3	0.1 ~ 1.0M	350	600	350	16	5.5	28	0.7
286	Small	5	0.22 ~ 560K	500	800	500	25	8	38	0.75
261	Standard	1	0.1 ~ 1.0M	350	600	350	12	5	25	0.7
262	Standard	2	0.1 ~ 1.0M	350	600	350	16	5.5	28	0.7

STANDARD STOCKED VALUES (Ω)

0.47	0.82	1.6	3.3	6.2	12	24	47	91	180	360	680	1.3K	2.7K	5.1K	10K	20K	39K	75K	150K	300K	560K
0.5	0.91	1.8	3.6	6.8	13	27	51	100	200	390	750	1.5K	3.0K	5.6K	11K	22K	43K	82K	160K	330K	620K
0.51	1.0	2.0	3.9	7.5	15	30	56	110	220	430	820	1.6K	3.3K	6.2K	12K	24K	47K	91K	180K	360K	680K
0.56	1.1	2.2	4.3	8.2	16	33	62	120	240	470	910	1.8K	3.6K	6.8K	13K	27K	51K	100K	200K	390K	750K
0.62	1.2	2.4	4.7	9.1	18	36	68	130	270	510	1.0K	2.0K	3.9K	7.5K	15K	30K	56K	110K	220K	430K	820K
0.68	1.3	2.7	5.1	10	20	39	75	150	300	560	1.1K	2.2K	4.3K	8.2K	16K	33K	62K	120K	240K	470K	910K
0.75	1.5	3.0	5.6	11	22	43	82	160	330	620	1.2K	2.4K	4.7K	9.1K	18K	36K	68K	130K	270K	510K	1.0M



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Xicon:

[262-220-RC](#) [261-220-RC](#) [262-1.5/REEL-RC](#) [282-1.5/REEL-RC](#) [261-820K-RC](#) [262-560-RC](#) [282-1.8K/REEL-RC](#)
[281-1.8K/REEL-RC](#) [261-560-RC](#) [282-1.1/REEL-RC](#) [262-1.1/REEL-RC](#) [262-39/REEL-RC](#) [262-0.62-RC](#) [283-0.47-RC](#)
[261-3.0-RC](#) [261-0.51-RC](#) [262-1.8K/REEL-RC](#) [262-3.0-RC](#) [261-1.8K/REEL-RC](#) [281-51K-RC](#) [283-51K-RC](#) [282-](#)
[51K-RC](#) [286-51K-RC](#) [262-1.6/REEL-RC](#) [282-1.6/REEL-RC](#) [262-36/REEL-RC](#) [261-8.2/REEL-RC](#) [281-8.2/REEL-RC](#)
[282-1.2/REEL-RC](#) [262-1.2/REEL-RC](#) [262-0.51-RC](#) [282-13K/REEL-RC](#) [262-13K/REEL-RC](#) [262-560/REEL-RC](#) [282-](#)
[560/REEL-RC](#) [262-820K-RC](#) [282-1.8/REEL-RC](#) [262-1.8/REEL-RC](#) [262-30/REEL-RC](#) [286-5.6K-RC](#) [286-1.6K-RC](#)
[286-3.6K-RC](#) [262-1.0/REEL-RC](#) [282-1.0/REEL-RC](#) [282-0.47-RC](#) [282-1.6K-RC](#) [282-5.6K-RC](#) [282-3.6K-RC](#) [286-](#)
[0.47-RC](#) [261-0.62-RC](#) [261-51K-RC](#) [262-51K-RC](#) [281-330/REEL-RC](#) [261-330/REEL-RC](#) [281-100K/REEL-RC](#) [282-](#)
[100K/REEL-RC](#) [261-750K-RC](#) [261-150K-RC](#) [286-560K-RC](#) [282-7.5K-RC](#) [282-1.5K-RC](#) [262-100K/REEL-RC](#) [262-](#)
[270-RC](#) [261-100K/REEL-RC](#) [261-0.5/REEL-RC](#) [281-0.5/REEL-RC](#) [261-270-RC](#) [262-1.6-RC](#) [261-1.6-RC](#) [261-68K-](#)
[RC](#) [282-82/REEL-RC](#) [281-620/REEL-RC](#) [261-620/REEL-RC](#) [262-68K-RC](#) [282-160K-RC](#) [282-560K-RC](#) [282-360K-](#)
[RC](#) [286-1.5K-RC](#) [286-7.5K-RC](#) [261-180/REEL-RC](#) [281-180/REEL-RC](#) [261-330-RC](#) [262-330-RC](#) [282-2.0K/REEL-](#)
[RC](#) [283-270-RC](#) [281-270-RC](#) [282-270-RC](#) [286-270-RC](#) [281-1.6-RC](#) [262-2.0K/REEL-RC](#) [283-1.6-RC](#) [282-1.6-RC](#)
[282-68K-RC](#) [286-68K-RC](#) [281-68K-RC](#) [281-5.6K/REEL-RC](#) [283-68K-RC](#) [282-5.6K/REEL-RC](#) [262-5.6K/REEL-RC](#)
[261-5.6K/REEL-RC](#)