


- 1. CONNECTOR 1 : 850-004-103RLS1, MOLDED STRAIGHT HOOD, COLOR BLACK
- 2. CONNECTOR 2 : 850-004-103RLS1, MOLDED STRAIGHT HOOD, COLOR BLACK
- 3. WIRE : 28AWG, 2 TWISTED PAIRS, UL20276, FOIL/BRAID/DRAIN WIRE SHIELD, COLOR BLACK, 30V
- 4. CABLE DIAMETER : 0.146 [3.70] ±0.006 [±0.15]
- 5. PIN OUT :

WIRING SCHEMATIC

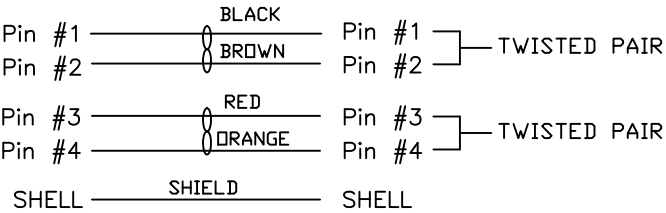

CCA-000-MYYR186

01 = 1 METER
02 = 2 METERS
03 = 3 METERS
04 = 4 METERS

**SEE PAGE 3 FOR CABLE SPECIFICATIONS


RoHS COMPLIANT

DO NOT SCALE FROM DRAWING

| | | | | | | | |
|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------------|---------|---------------|--------------------|----------|
| | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | DRAWN: M. SIGMON | DATE: 04-13-15 | NorComp | SCALE: NTS | SHEET 1 OF 3 | REV 4 |
| | | CHECKED: | DATE: | | DWG NO. | CCA-000-MYYR186 | |

ELECTRICAL CHARACTERISTICS

VOLTAGE RATING : 30V
TEMPERATURE RATING : 80°C
SPARK TEST : AC-500V/0.15 sec MIN.
DIELECTRIC STRENGTH : AC-750V/1 sec MIN.
INSULATION RESISTANCE : SR-PVC: DC-500V 10 MOHM/KM MIN. AT 20°C
CONDUCTOR RESISTANCE : 28AWG-244 OHM/KM MAX. AT 25°C

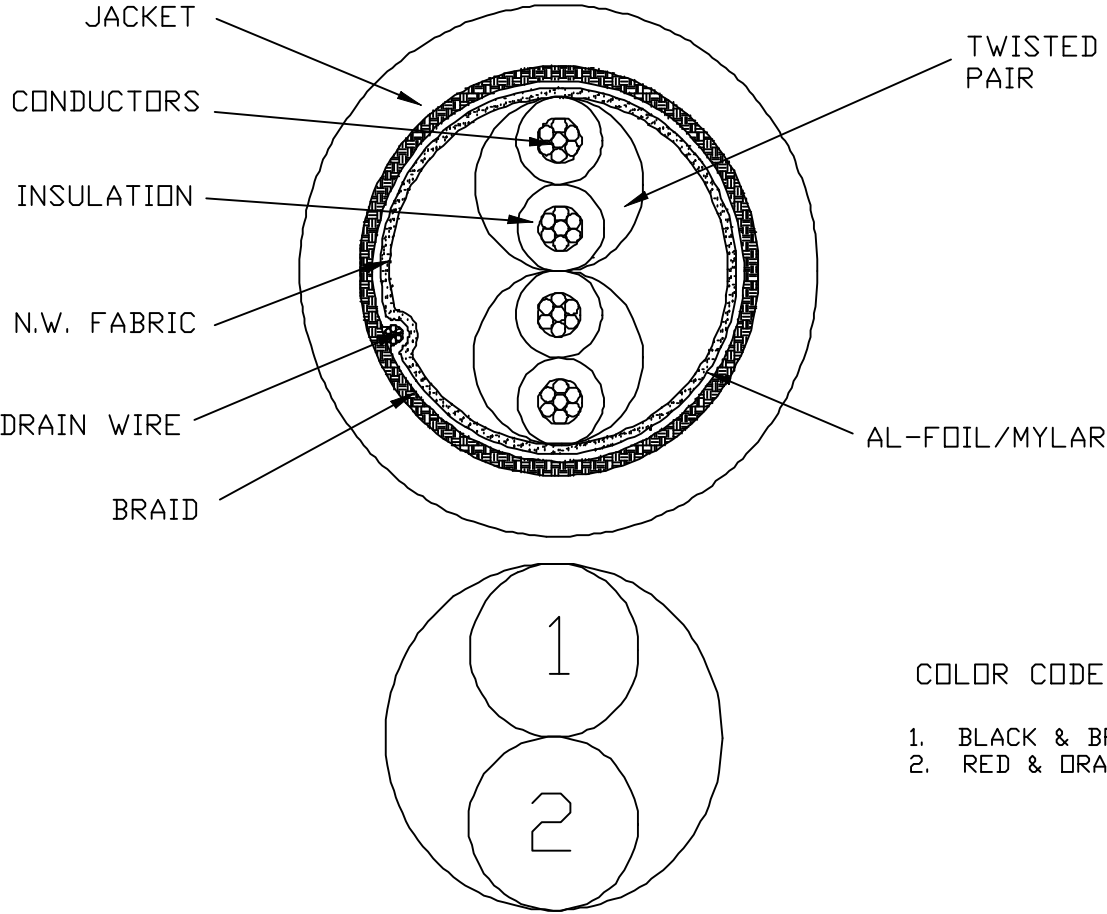

COLOR CODE

- 1. BLACK & BROWN (P570 & P571)
- 2. RED & ORANGE (P572 & P573)

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NorComp:

[CCA-000-M01R186](#) [CCA-000-M02R186](#) [CCA-000-M03R186](#)