

## Type 3R Wiring Trough *C3RWT Series*

### Application



- Designed for use to protect multiple wiring junctions in outdoor environments against the ingress of rain, sleet, snow and the external formation of ice.

### Standards

- UL870 Type 3R
- CSA Type 3R
- Complies with
  - NEMA Type 3R
  - IEC 60529, IP24




### Construction

- Formed and spot welded from 14 or 16 gauge galvanized steel
- Drip shield top design protects the enclosure against rain, snow or sleet
- Embossed mounting holes on back of enclosure
- Slip on removable front cover is secured with screws
- Padlocking hasp
- To fully comply with UL870 - 2008 requirements a bonding stud is provided on the cover and a ground stud is provided in the enclosure
- A #10 AWG - 12" grounding strap with crimped on ring terminals is also provided to comply with UL requirements

### Finish

- Enclosure and cover are finished in ANSI 61 gray powder coating.

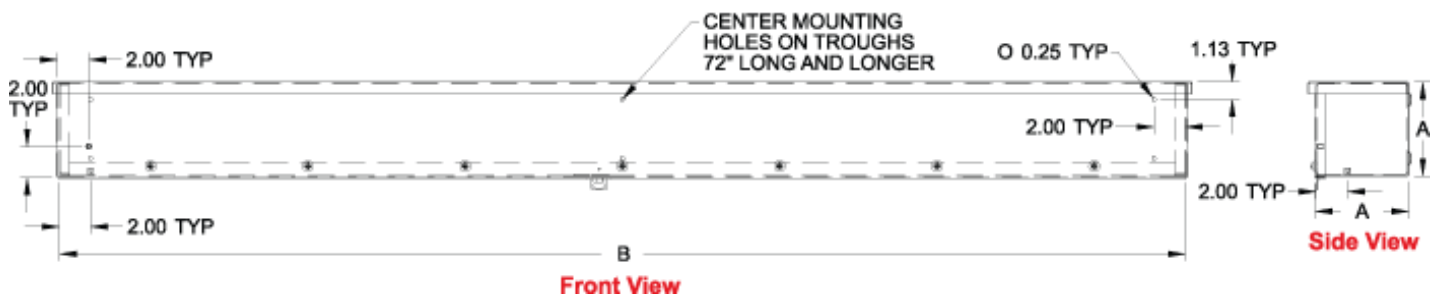

Part No.	A	B	Ship Wt. (lbs)
C3RWT412	4.00	12.00	5.5
C3RWT418	4.00	18.00	6.25
C3RWT424	4.00	24.00	9
C3RWT436	4.00	36.00	12.5
C3RWT448	4.00	48.00	16
C3RWT460	4.00	60.00	19.5

Part No.	A	B	Ship Wt. (lbs)
C3RWT872	8.00	72.00	55.5
C3RWT896	8.00	96.00	72.5
C3RWT8116	8.00	116.00	86.5
C3RWT1024	10.00	24.00	27
C3RWT1036	10.00	36.00	37.5
C3RWT1048	10.00	48.00	48

<b>Part No.</b>	<b>A</b>	<b>B</b>	<b>Ship Wt. (lbs)</b>
<b>C3RWT472</b>	4.00	72.00	23
<b>C3RWT612</b>	6.00	12.00	8
<b>C3RWT618</b>	6.00	18.00	10.5
<b>C3RWT624</b>	6.00	24.00	13
<b>C3RWT636</b>	6.00	36.00	18
<b>C3RWT648</b>	6.00	48.00	23
<b>C3RWT660</b>	6.00	60.00	28
<b>C3RWT672</b>	6.00	72.00	33
<b>C3RWT812</b>	8.00	12.00	13
<b>C3RWT824</b>	8.00	24.00	21.5
<b>C3RWT836</b>	8.00	36.00	30
<b>C3RWT848</b>	8.00	48.00	38.5
<b>C3RWT860</b>	8.00	60.00	47

<b>Part No.</b>	<b>A</b>	<b>B</b>	<b>Ship Wt. (lbs)</b>
<b>C3RWT1060</b>	10.00	60.00	58.5
<b>C3RWT1072</b>	10.00	72.00	69
<b>C3RWT1096</b>	10.00	96.00	90
<b>C3RWT10116</b>	10.00	116.00	107.5
<b>C3RWT1224</b>	12.00	24.00	33
<b>C3RWT1236</b>	12.00	36.00	45.5
<b>C3RWT1248</b>	12.00	48.00	58
<b>C3RWT1260</b>	12.00	60.00	70.5
<b>C3RWT1272</b>	12.00	72.00	83
<b>C3RWT1284</b>	12.00	84.00	95.5
<b>C3RWT1296</b>	12.00	96.00	108
<b>C3RWT12116</b>	12.00	116.00	128

*Data subject to change without notice*