


- Features:
- High power rating – up to 2W
 - Wide resistance range (0.001Ω – 0.6Ω)
 - Current handling up to 26 amps
 - TCR down to ±50 ppm/°C
 - Other resistance values may be available
 - RoHS compliant / lead-free

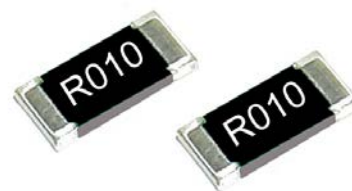


Electrical Specifications			
Type / Code	Power Rating (Watts)	Resistance Temperature Coefficient	Ohmic Range (Ω) and Tolerance
			1% and 5%
CSRF0402 ⁽²⁾	0.125W	±200 ppm/°C	0.003 - 0.015
CSRF0402...-HP	0.25W	±200 ppm/°C	0.003 - 0.02
CSRF0603 ⁽²⁾	0.25W	±150 ppm/°C	0.0025 - 0.009
		±75 ppm/°C	0.01 - 0.02
CSRF0603...-HP	0.5W	±200 ppm/°C	0.0025 - 0.009
		±75 ppm/°C	0.01 - 0.03
CSRF0805	0.5W	±100 ppm/°C	0.005 - 0.01
		±50 ppm/°C	0.011 - 0.03
CSRF1206 ⁽²⁾	1W	±100 ppm/°C	0.005 - 0.01
		±50 ppm/°C	0.011 - 0.05
CSRF0612	1.5W	±100 ppm/°C	0.003 - 0.004
		±75 ppm/°C	0.005 - 0.029
CSRF2010 ⁽¹⁾	1W	±100 ppm/°C	0.005, 0.006, 0.007, 0.008, 0.009, 0.01
CSRF2512	2W	±100 ppm/°C	0.001 - 0.01
		±50 ppm/°C	0.011 - 0.6

(1) For 2010 size, MOQ of 20Kpcs per value is required.

(2) Qualified to AEC-Q200

Please refer to the High Power Resistor Application Note (page 4) for more information on designing and implementing high power resistor types.

Power Derating Curve:

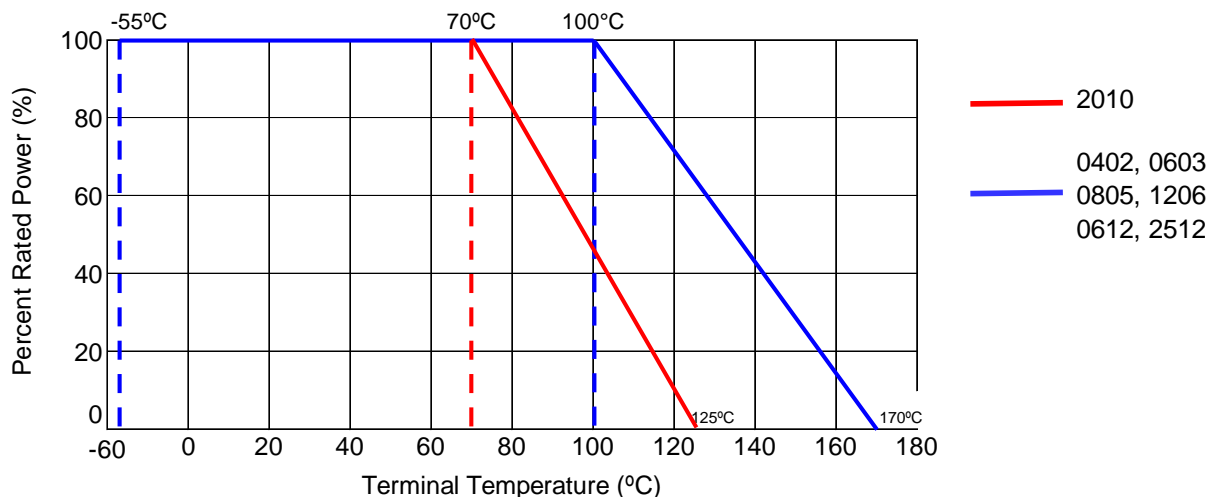

Mechanical Specifications

Fig.1




Fig.2




Fig.3





Fig.4



Type / Code	L Body Length	W Body Width	H Body Height	A Bottom Termination	Unit
CSRF0402 (Fig. 1)	0.039 ± 0.004 1.00 ± 0.10	0.022 ± 0.004 0.55 ± 0.10	0.018 ± 0.004 0.45 ± 0.10	0.010 ± 0.004 0.25 ± 0.10	inches mm
CSRF0603 (Fig. 1)	0.063 ± 0.004 1.60 ± 0.10	0.031 ± 0.004 0.80 ± 0.10	0.022 ± 0.006 0.55 ± 0.15	0.012 ± 0.008 0.30 ± 0.20	inches mm
CSRF0805 (Fig. 2)	0.083 ± 0.008 2.10 ± 0.20	0.051 ± 0.006 1.30 ± 0.15	0.028 ± 0.006 0.70 ± 0.15	0.018 ± 0.008 0.45 ± 0.20	inches mm
CSRF1206 (Fig. 2)	0.122 ± 0.008 3.10 ± 0.20	0.061 ± 0.008 1.55 ± 0.20	0.028 ± 0.006 0.70 ± 0.15	0.022 ± 0.008 0.55 ± 0.20	inches mm
CSRF0612 (Fig. 4)	0.063 ± 0.008 1.60 ± 0.20	0.126 ± 0.008 3.20 ± 0.20	0.024 ± 0.008 0.60 ± 0.20	0.012 ± 0.008 0.30 ± 0.20	inches mm
CSRF2010 (=5mΩ) (Fig. 3)	0.197 ± 0.008 5.00 ± 0.20	0.098 ± 0.008 2.50 ± 0.20	0.041 ± 0.006 1.05 ± 0.15	0.039 ± 0.006 1.00 ± 0.15	inches mm
CSRF2010 (>5mΩ) (Fig. 3)	0.197 ± 0.008 5.00 ± 0.20	0.098 ± 0.008 2.50 ± 0.20	0.031 ± 0.006 0.80 ± 0.15	0.039 ± 0.006 1.00 ± 0.15	inches mm
CSRF2512 (Fig. 2)	0.254 ± 0.008 6.45 ± 0.20	0.128 ± 0.008 3.25 ± 0.20	0.031 ± 0.006 0.80 ± 0.15	0.043 ± 0.010 1.10 ± 0.25	inches mm

Performance Characteristics

Test	Test Method	Test Specification	Typical
Load Life	MIL-STD-202F-Method 108A RCWV at 70°C; 1.5 h. ON; 0.5 h. OFF Total 1024 ± 24 hours	±1%	≤ 0.5%
Resistance to Soldering Heat	MIL-STD-202F-Method 210E 260 ± 5°C for 10 ± 1 seconds	±1%	≤ 0.3%
Solderability	MIL-STD-202F-Method 208H 245 ± 5°C for 2 ± 0.5 seconds	minimum 95% coverage	> 95%
Thermal Shock	MIL-STD-202F-Method 107G -55°C to 150°C, 100 cycles	±1%	≤ 0.3%
Short Time Overload	JIS-C-5202-5.5 5x rated power for 5 seconds	±1%	≤ 0.3%
High Temperature Exposure	125°C: 1000 hours	±1%	≤ 0.2%
Moisture Resistance	MIL-STD-202F-Method 106G	±1%	≤ 0.5%
Insulation Resistance	MIL-STD-202F-Method 302 Apply 100Vdc for 1 minute	1MΩ minimum	≥ 1MΩ

Operating Temperature Range: -55°C to +170°C


How to Order

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
C	S	R	F	0	4	0	2	F	T	8	L	0	0	-	H P
Product Series		Size	Power	Tolerance		Packaging				Resistance Value			Special		
CSRF	Foil / Ceramic	0402	0.125W	Code	Tol	T	7" Reel Paper Tape	0402	10,000	Four characters with the multiplier used as the decimal holder. "L" used as multiplier of 10 ⁻³ for any value under 0.1 ohm.. 0.005 ohm = 5L00 0.01 ohm = 10L0 0.1 ohm = R100			Code	Description	
		0402 HP	0.25W	F	1%			0603, 0805	5,000				HP	High Power	
		0603	0.25W	J	5%			0612	4,000						
		0603 HP	0.5W					1206	2,000						
		0805	0.5W					2010, 2512	2,000						
		1206	1W												
		0612	1.5W												
		2010	1W												
		2512	2W												

High Power Chip Resistors and Thermal Management

Stackpole has developed several surface mount resistor series in addition to our current sense resistors, which have had higher power ratings than standard resistor chips. This has caused some uncertainty and even confusion by users as to how to reliably use these resistors at the higher power ratings in their designs.

The data sheets for the RHC, RMCP, RNCP, CSR, CSRN, CSRF, CSS, and CSSH state that the rated power assumes an ambient temperature of no more than 100°C for the CSS / CSSH series and 70°C for all other high power resistor series. In addition, IPC and UL best practices dictate that the combined temperature on any resistor due to power dissipated and ambient air shall be no more than 105°C. At first glance this wouldn't seem too difficult, however the graph below shows typical heat rise for the CSR1206 100 milliohm at full rated power. The heat rise for the RMCP and RNCP would be similar. The RHC with its unique materials, design, and processes would have less heat rise and therefore would be easier to implement for any given customer.

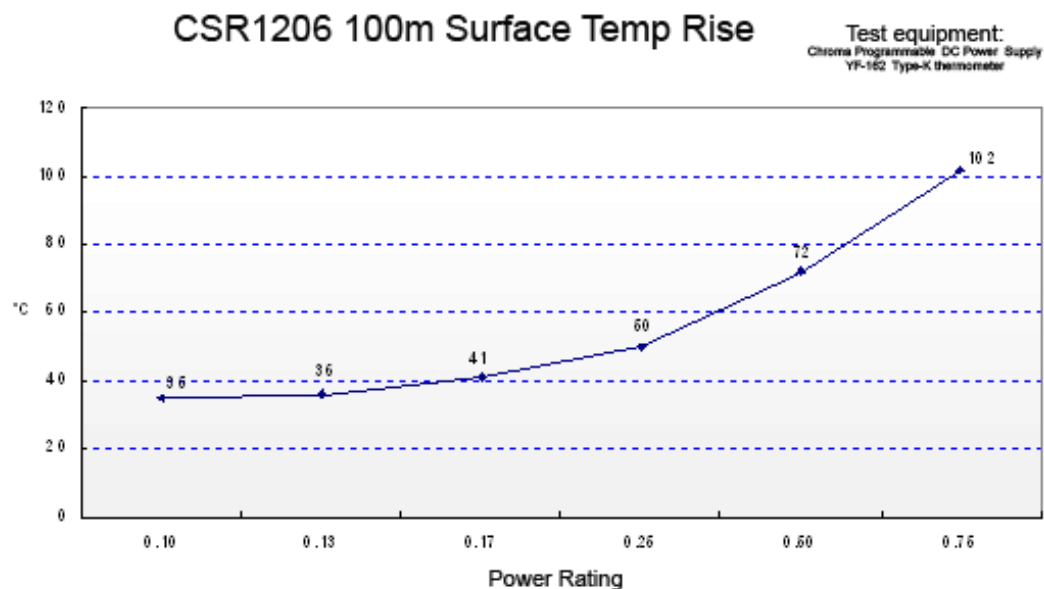

The 102°C heat rise shown here would indicate there will be additional thermal reduction techniques needed to keep this part under 105°C total hot spot temperature if this part is to be used at 0.75 watts of power. However, this same part at the usual power rating for this size would have a heat rise of around 72°C. This additional heat rise may be dealt with using wider conductor traces, larger solder pads and land patterns under the solder mask, heavier copper in the conductors, vias through PCB, air movement, and heat sinks, among many other techniques. Because of the variety of methods customers can use to lower the effective heat rise of the circuit, resistor manufacturers simply specify power ratings with the limitations on ambient air temperature and total hot spot temperatures and leave the details of how to best accomplish this to the design engineers. Design guidelines for products in various market segments can vary widely so it would be unnecessarily constraining for a resistor manufacturer to recommend the use of any of these methods over another.

Note: The final resistance value can be affected by the board layout and assembly process, especially the size of the mounting pads and the amount of solder used. This is especially notable for resistance values ≤ 50 m Ω . This should be taken into account when designing.