

(2,54 mm) .100"

SLW, CES SERIES

SLW-120-01-T-S

CES-115-01-T-S

SLW-110-01-T-D

CES-125-01-T-D

LOW PROFILE SOCKET STRIPS

SPECIFICATIONS

For complete specifications see www.samtec.com?SLW

Insulator Material:

Black G.F. Polyester

Contact Material:

Phosphor Bronze

Plating:

Au or Sn over

50µ" (1,27 µm) Ni

Voltage Rating:

550 VAC

Operating Temp Range:

-55°C to +125°C with Gold

-55°C to +105°C with Tin

Contact Resistance:

10 mΩ

Insertion Depth:

(2,16 mm) .085" to

(2,92 mm) .115"

Insertion Force:

(Single contact only)

(3,34 N) 12 oz. avg.

(0,64 mm) .025" SQ pin

Withdrawal Force:

(Single contact only)

(1,67 N) 6 oz. avg.

(0,64 mm) .025" SQ pin

RoHS Compliant:

Yes

Lead-Free Solderable:

Wave only



SLW


1

NO. PINS
PER ROW

01

PLATING
OPTIONROW
OPTION

01 thru 50

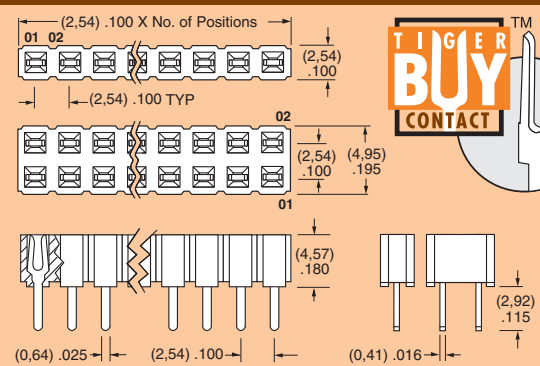

-F

= Gold flash on contact,
Matte Tin on tail

-L

= 10µ" (0,25 µm) Gold on contact,
Matte Tin on tail

-G

= 20µ" (0,51 µm) Gold on contact,
Gold flash on balance

-T

= Matte Tin

-S
= Single
Row-D
= Double
Row

Note: Other Gold
plating options available.
Contact Samtec.

CURRENT RATING (PER CONTACT)	
AMBIENT TEMP	SLW mated with TSW
20°C	7.1A
40°C	6.2A
60°C	5.8A
95°C	3.7A
6 POSITIONS (2x3) POWERED	

Note: Some lengths,
styles and options are
non-standard, non-returnable.

Mates with:

TLW, TSW, MTLW, MTSW,
HW, EW, ZW, HTSW, HMTSW, TSM

SPECIFICATIONS

For complete specifications see www.samtec.com?CES

Insulator Material:

Black G.F. Polyester

Contact Material:

Phosphor Bronze

Plating: Au or Sn over

50µ" (1,27 µm) Ni

Current Rating:

1A/Contact

Voltage Rating:

333 VAC

Operating Temp Range:

-55°C to +125°C with Gold

-55°C to +105°C with Tin

Contact Resistance:

10 mΩ

Insertion Depth:

(2,62 mm) .103" to

(4,06 mm) .160"

Insertion Force:

(Single contact only)

(2,22 N) 8 oz. avg.

(0,64 mm) .025" SQ pin

Withdrawal Force:

(Single contact only)

(1,11 N) 4 oz. avg.

(0,64 mm) .025" SQ pin

RoHS Compliant:

Yes

Lead-Free Solderable:

Wave only





CES

1

NO. PINS
PER ROWLEAD
STYLEPLATING
OPTIONROW
OPTIONRA
OPTION

01 thru 50

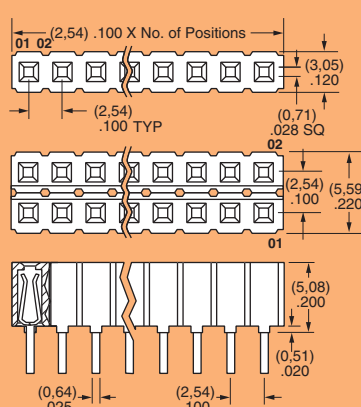-01
= (3,25 mm)
.128
"A" Dim.-02
= (5,66 mm)
.223
"A" Dim.

-L

= 10µ" (0,25 µm)
Gold contact,
Matte Tin on tail

-T

= Matte Tin

-S


= Single
Row

-D

= Double
Row

-RA
= Right Angle
version

Style -02 only
Single Row only




Note: Other Gold plating
options available.
Contact Samtec.

Note: Some lengths,
styles and options are
non-standard, non-returnable.

Mates with:

TLW, TSW, MTLW,
MTSW, HW, EW, ZW,
DW, HTSW, PHT, HMTSW



Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC NORTHERN CALIFORNIA • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-6083 3766
SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9580 0683