
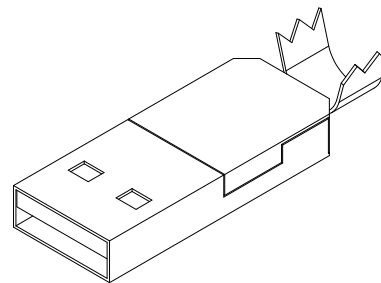

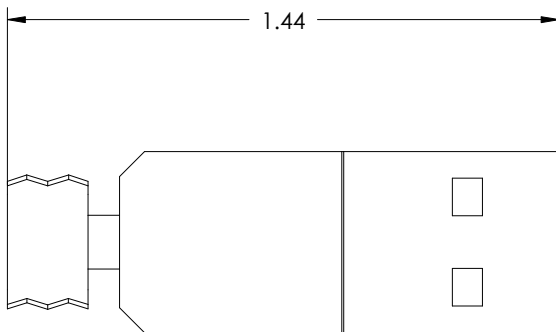



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/15/04	MCCORMICK



#### SPECIFICATIONS:

- UL94V-0 COMPLIANT (CONTACT HOUSING)

#### MATERIALS

- TOP & BOTTOM SHELL: STEEL – TIN/LEAD FINISH
- CONTACTS: COPPER ALLOY
- CONTACT PLATING: SELECTIVE GOLD PLATING

#### ELECTRICAL

##### RATING:

- VOLTAGE: 30 VAC (R.M.S.)

#### ENVIROMENTAL

- OPERATING TEMPERATURE RANGE: -55°C TO +85°C, UNLESS LIMITED BY CABLE OR OVERMOLD (-40°C TO +60°C STORAGE; +0°C TO +40°C OPERATING).

#### APPLICATION NOTES

- APPLICABLE CABLE DIAMETER:  $\phi$ .134 TO  $\phi$ .209

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONS ARE IN INCHES  
TOLERANCES ARE:  
.X  $\pm$ .1  
.XX  $\pm$ .05  
.XXX  $\pm$ .005  
CABLE LENGTH TOLERANCE  
<300"  $\pm$ 5% >300"  $\pm$ 2%

APPROVALS	DATE
DRAWN BY C.MCCORMICK	04/13/2004
CHECKED BY D.PARHAM	04/13/2004
APPROVED BY R.CARRICK	04/13/2004

CONFIGURATION DETAILS OF  
UNDIMENSIONED FEATURES  
MAY VARY

**L-com**  
CONNECTIVITY  
PRODUCTS

45 BEECHWOOD DRIVE  
NORTH ANDOVER, MA  
01845

PRODUCT DESCRIPTION			
USB PLUG - SERIES A w/o HOOD			
DRAWING TITLE			
OUTLINE DRAWING			
SIZE	FSCM NO.	DWG. NO.	REV
A	43321	CNUSB-A-OD1	A
SCALE: 2:1		CAD FILE: CNUSB-A-OD1.SLDDRW	SHEET 1 OF 1