
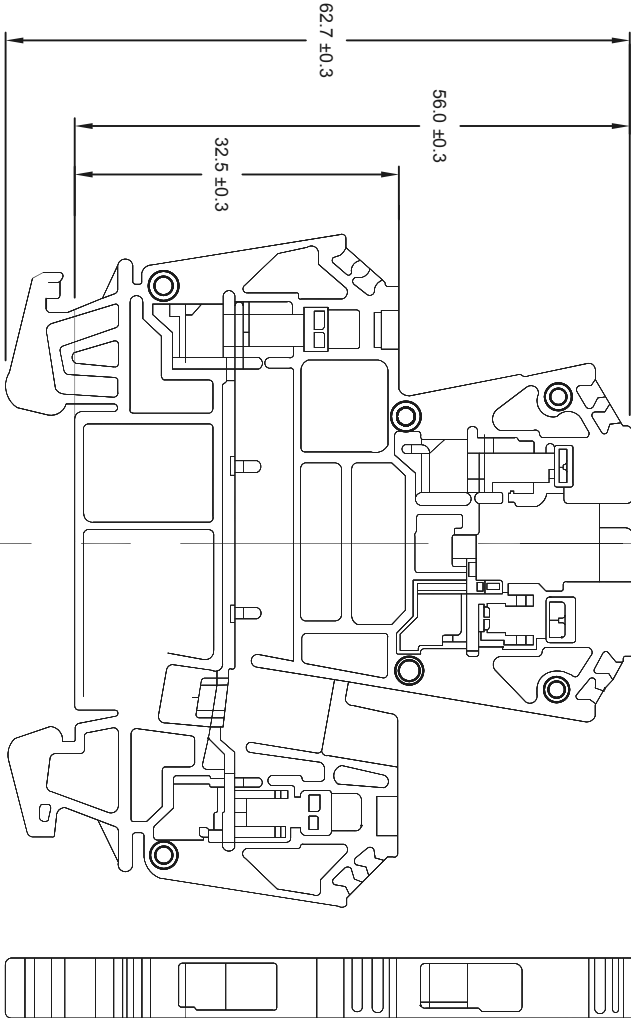


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG


REVISIONS				DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE	
			MRD	01-08-10	JAG	03-08-10	XXX	16-08-10	

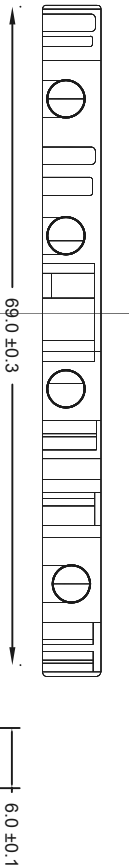

Dimensions : Millimeters

Specifications

Rated voltage : 600V
Rated current : 30A
Solid wire (AWG) : 10 ~ 22
Stranded wire (AWG) : 10 ~ 22
Insulating withstanding voltage : 6kV
Torque (lb-in) : 10
Screw : M3
Wire strip length : 6mm
Mounting rail : TS 35 x 7.5 / TS 35 x 15 / TS32



Description	Part Number
Din Terminal Block	CDK4

	Material	Plating/Finish	Remark
1	Insulating body	PA66 (UL94 V-0)	Grey
2	Screw	Steel M3	Zinc
3	Terminal	Phosphor Bronze	Tin plated
4	Cage Clamp	Steel	Zinc

DISCLAIMER:

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

MIRD

DATE:

01-08-10

CHECKED BY:

JAG

DATE:

03-08-10

APPROVED BY:

XXX

DRAWING TITLE:

Din Terminal Block

SIZE

A

DWG. NO.

04R6688

ELECTRONIC FILE

CDK4X

REV

A

SCALE:

NTS

U.O.M.: Millimeters

SHEET:

1

OF

1