



3651.3

ZRKS 2,5/1A/2S OG

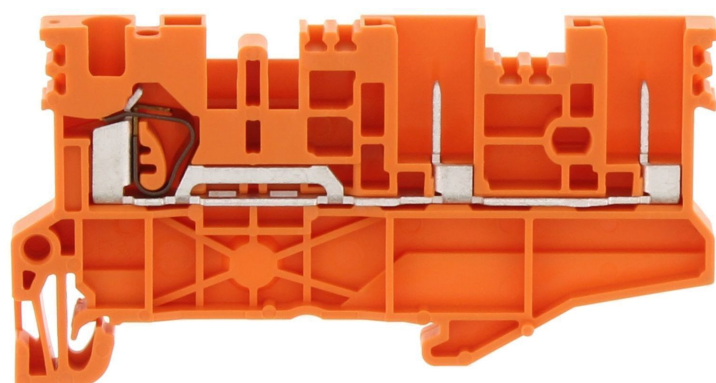

Feed-through terminal, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm², Width: 5.1 mm, Colour: Orange

Business data

Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	8 g
Weight per piece (including packaging)	8.5 g
Unit of weight	G
Customs number	85369010
Country of origin	CZ
Product description	Feed-through terminal

Technical data

Dimensions

Length	72.5 mm
Width	5.1 mm
Height	38.5 mm
Height TS 35/7.5	39.5 mm
Pitch	5 mm

Ratings

Rated voltage	500 V
Rated current	24 A
Rated cross-section	2.5 mm ²
Rated impulse voltage	6 kV
Overvoltage category	III
Contamination degree	3

Connection data

Connection principle	Tension-spring connection
Connection position	Top
Connections	3
Wire cross-section single-core (rigid) / stranded, min.	0.5 mm ²
Wire cross-section single core (rigid)/stranded, max.	4 mm ²
Wire cross-section stranded, min.	0.5 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.5 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Wire cross-section AWG, min.	20
Wire cross-section AWG, max.	12
Stripping length	10 mm

3651.3

ZRKS 2,5/1A/2S OG

Technical data

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

Further technical data

Mounting type	Mounting rail TS 35/7,5
Gauge plug acc. to EN 60 947-1	A3
Number of cross-connection channels	2
End plate required	✓
Number of test pick-off options	1

Print

Colour	Orange
--------	--------

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2021-01-09
REACH Candidate Substance Note	No
RoHS Conform	yes

3651.3

ZRKS 2,5/1A/2S OG

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	yes
----------------------	-----

CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	yes
----------------------	-----

CSA Usegroup C: rated voltage	300 V
-------------------------------	-------

CSA Usegroup C: rated current	20 A
-------------------------------	------

CSA wire cross-section AWG, min.	20
----------------------------------	----

CSA wire cross-section AWG, max.	12
----------------------------------	----

CSA stripping length	10 mm
----------------------	-------

CSAus approval

CSAus approval	UL 1059
----------------	---------

CSAus approval granted	yes
------------------------	-----

CSAus Usegroup C: rated voltage	300 V
---------------------------------	-------

CSAus Usegroup C: rated current	20 A
---------------------------------	------

CSAus wire cross-section AWG, min.	20
------------------------------------	----

CSAus wire cross-section AWG, max.	12
------------------------------------	----

CSAus stripping length	10 mm
------------------------	-------

Approvals

cUL Recognized

cUL approval	C22.2 No 158
cUL Usegroup B: rated voltage	300 V
cUL Usegroup B: rated current	20 A
cUL Usegroup C: rated voltage	300 V
cUL Usegroup C: rated current	20 A
cUL Usegroup D: rated voltage	300 V
cUL Usegroup D: rated current	20 A
cUL wire cross-section single-core (rigid) AWG, min.	20
cUL wire cross-section single-core (rigid) AWG, max.	12
cUL wire cross-section stranded AWG, min.	20
cUL wire cross-section stranded AWG, max.	12
cUL wire material	Cu
cUL Recognized	yes

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1:2009
KEMA KEUR approval granted	yes
KEMA rated voltage	500 V
KEMA rated current	24 A
KEMA rated impulse voltage	6 kV
KEMA wire cross-section single core (rigid), min.	0.5 mm ²
KEMA wire cross-section single-core (rigid), max.	4 mm ²
KEMA wire cross-section stranded, min.	0.5 mm ²
KEMA wire cross-section stranded, max.	4 mm ²

3651.3



ZRKS 2,5/1A/2S OG

Approvals

UL Recognized

UL approval	UL 1059
UL Usegroup B: rated voltage	300 V
UL Usegroup B: rated current	20 A
UL Usegroup C: rated voltage	300 V
UL Usegroup C: rated current	20 A
UL Usegroup D: rated voltage	300 V
UL Usegroup D: rated current	20 A
UL wire cross-section single-core (rigid) AWG, min.	20
UL wire cross-section single-core (rigid) AWG, max.	12
UL wire cross-section stranded AWG, min.	20
UL wire cross-section stranded AWG, max.	12
UL wire material	Cu
UL factory wiring	yes
UL field wiring	yes
UL Recognized	yes

Media

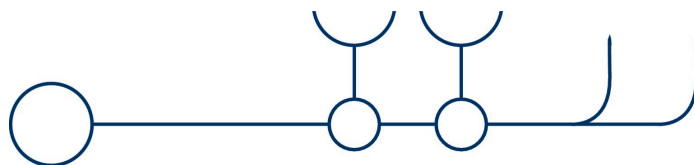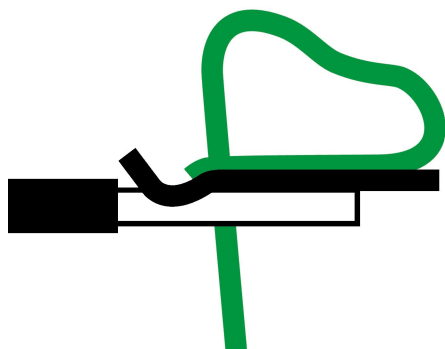

3651.3

ZRKS 2,5/1A/2S OG

Accessories

End plate



End plate, Width: 1.5 mm, Colour: Beige

detail.dataSheet.generalOrderData

Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
3681.2	ZAPS 2,5/1A/2S BG	4044211177591	500 ST

Actuating tool



Actuating tool, No. of poles: 1, Colour: Black

detail.dataSheet.generalOrderData


Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
3808.0	BWMA 1 (0,5 x 3,5 mm)	4044211078850	500 ST

3651.3

ZRKS 2,5/1A/2S OG

Accessories

Coding



Coding, Colour: Orange

detail.dataSheet.generalOrderData

Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
3689.3	ZST-C OG	4044211177805	500 ST

End stop



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 5 mm, Colour: Beige

detail.dataSheet.generalOrderData

Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
3811.2	ZES 35/2 BG	4044211080600	500 ST

3651.3

ZRKS 2,5/1A/2S OG

Accessories

Test adapter



Test adapter, Pitch size: 5.1 mm, Colour: Beige

detail.dataSheet.generalOrderData

Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
3740.2	ZTA 2,5 BG	4044211060497	500 ST

3651.3

ZRKS 2,5/1A/2S OG

Accessories

Insulated cross-connector



Insulated cross-connector, No. of poles: 7,
Mounting type: Plug in, Width: 34.6 mm,
Rated cross-section: 2.5 mm², Colour: Yellow

detail.dataSheet.generalOrderData


Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
3715.8	ZQI 2,5/7 YE	4044211060336	500 ST



Insulated cross-connector, No. of poles: 2,
Mounting type: Plug in, Width: 9.1 mm, Rated
cross-section: 2.5 mm², Colour: Yellow

detail.dataSheet.generalOrderData

Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
3710.8	ZQI 2,5/2 YE	4044211060282	500 ST

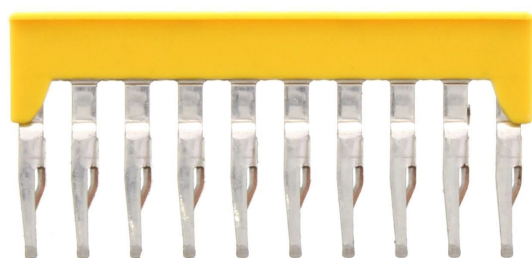

Insulated cross-connector, No. of poles: 10,
Mounting type: Plug in, Width: 49.9 mm,
Rated cross-section: 2.5 mm², Colour: Yellow

detail.dataSheet.generalOrderData

Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
3718.8	ZQI 2,5/10 YE	4044211060367	500 ST

Creation date 13.06.2021 22:56:12
Subject to technical changes

3651.3

ZRKS 2,5/1A/2S OG

Accessories

Insulated cross-connector



Insulated cross-connector, No. of poles: 3,
Mounting type: Plug in, Width: 14.2 mm,
Rated cross-section: 2.5 mm², Colour: Yellow

detail.dataSheet.generalOrderData

Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
3711.8	ZQI 2,5/3 YE	4044211060299	500 ST



Insulated cross-connector, No. of poles: 5,
Mounting type: Plug in, Width: 24.4 mm,
Rated cross-section: 2.5 mm², Colour: Yellow

detail.dataSheet.generalOrderData

Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
3713.8	ZQI 2,5/5 YE	4044211060312	500 ST



Insulated cross-connector, No. of poles: 8,
Mounting type: Plug in, Width: 39.7 mm,
Rated cross-section: 2.5 mm², Colour: Yellow

detail.dataSheet.generalOrderData

Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
3716.8	ZQI 2,5/8 YE	4044211060343	500 ST ¹²

3651.3

ZRKS 2,5/1A/2S OG

Accessories

Insulated cross-connector



Insulated cross-connector, No. of poles: 9,
Mounting type: Plug in, Width: 44.8 mm,
Rated cross-section: 2.5 mm², Colour: Yellow

detail.dataSheet.generalOrderData

Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
3717.8	ZQI 2,5/9 YE	4044211060350	500 ST



Insulated cross-connector, No. of poles: 4,
Mounting type: Plug in, Width: 19.3 mm,
Rated cross-section: 2.5 mm², Colour: Yellow

detail.dataSheet.generalOrderData

Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
3712.8	ZQI 2,5/4 YE	4044211060305	500 ST



Insulated cross-connector, No. of poles: 6,
Mounting type: Plug in, Width: 29.5 mm,
Rated cross-section: 2.5 mm², Colour: Yellow

detail.dataSheet.generalOrderData

Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
3714.8	ZQI 2,5/6 YE	4044211060329	500 ST 13

3651.3

ZRKS 2,5/1A/2S OG

Accessories

Insulated cross-connector




Insulated cross-connector, No. of poles: 99,
Mounting type: Plug in, Width: 500 mm,
Rated cross-section: 2.5 mm², Colour: Yellow

detail.dataSheet.generalOrderData

Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
3719.8	ZQI 2,5/0,5 m/99 Pole YE	4044211060374	500 ST

Quick marking



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 5 mm, Colour: White

detail.dataSheet.generalOrderData

Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
4600.7	PMC SB 5/50 WH	4044211088903	500 ST

3651.3

ZRKS 2,5/1A/2S OG

Accessories

Locking mechanism

Locking mechanism, Colour: Orange



detail.dataSheet.generalOrderData

Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
3687.3	ZST-V OG	4044211177911	500 ST

Locking mechanism, Colour: Orange



detail.dataSheet.generalOrderData

Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
3690.3	ZST-V-I OG	4044211185244	500 ST

3651.3

ZRKS 2,5/1A/2S OG

Accessories

Four-way cover



Cover, Length: 6.7 mm, Width: 20.4 mm,
Colour: Yellow

detail.dataSheet.generalOrderData

Product number:	detail.dataSheet.productName	GTIN (EAN)	detail.dataSheet.
3706.0	ZAD 2,5/4/B YE	4044211060244	500 ST
