





"Coined"
edges prevent
cable damage

HEYClip™ SunRunner® Cable Clips


Double-Compression, Straight-thru Design

- Heyco's SunRunner and SunRunner EZ's robust "double-compression" design securely holds from (1) 12 gauge USE-2 to (2) 10 gauge PV-1000V solar wires.
- Also for use with other cables from .20" (5,1 mm) to .30" (7,6 mm) in diameter.
- Heyco SunRunner Clips are designed to provide a better method for PV module wire management **and may be used wherever single or multiple cable management is needed.**
- Smooth clip edges prevent damage to cable insulation.
- Locking tabs securely fasten clips to module extrusions, **or other panels.**
- Generous lead in for installation without tools.
- Screwdriver slot for easy removal or movement of clips if necessary.
- Neatly dresses cables on PV panel frames or along mounting channels.
- Constructed from corrosion resistant 304 stainless steel, not for use in a marine salt water environment.
- 316 stainless steel now available for marine and other harsh environments.
- **SunRunner EZ's are designed for thicker module frames** as well as racking – accommodates profiles up to .250" (6,4 mm) thick!
- **SunRunner 4 designed to hold up to (4) 12 gauge USE-2 or (4) 10 gauge PV-1000V solar wires.**
- SunRunner 4 is constructed from heat treated 410 stainless steel for excellent strength and corrosion protection for outdoor exposure.
- DFARS Compliant.



| PANEL THICKNESS CLAMPING RANGE | | | | WIRE DIA. RANGE | PART NO. | | DESCRIPTION | FOOTPRINT | | OVERALL HEIGHT | | |
|---|-----|---------|-----|---|-----------|------------------------------|----------------------------------|------------|----------------|-------------------|------|--|
| Minimum | | Maximum | | | 304 | 316 | | A x B | | C | | |
| in. | mm. | in. | mm. | | Stainless | Stainless | | in. | mm. | in. | mm. | |
| 1-2 Wires - SunRunner Clip for panels up to .090" (2,3 mm) thick | | | | | | | | | | | | |
| .06 | 1,4 | .09 | 2,3 | .20" (5,1 mm)- .30" (7,6 mm) each cable | \$6405 | \$6490 | SunRunner® Clip 100 Pack | .97 x .50 | 24,6 x 12,7 | .39 | 9,9 | |
| | | | | \$6445 | \$6495 | SunRunner® Clip Bulk | | | | | | |
| 1-2 Wires - SunRunner EZ Clip for panels up to .250" (6,4 mm) thick | | | | | | | | | | | | |
| .09 | 2,3 | .25 | 6,4 | .20" (5,1 mm)- .30" (7,6 mm) each cable | \$6407 | - | SunRunner® EZ Clip 100 Pack | .97 x .50 | 24,6 x 12,7 | .41 | 10,4 | |
| | | | | \$6447 | - | SunRunner® EZ Clip Bulk | | | | | | |
| 4 Wires - SunRunner 4 Clip for panels up to .125" (3,2 mm) thick | | | | | | | | | | | | |
| .06 | 1,4 | .13 | 3,2 | .20" (5,1 mm)- .30" (7,6 mm) each cable | \$6443 | - | SunRunner® 4 Clip 100 Pack | 1.34 x .50 | 33,8 x 12,7 | .36 | 9,1 | |
| | | | | \$6483 | - | SunRunner® 4 Clip Bulk | | | | | | |
| 4 Wires - SunRunner 4 EZ Clip for panels up to .250" (6,4 mm) thick | | | | | | | | | | | | |
| .13 | 3,2 | .25 | 6,4 | .20" (5,1 mm)- .30" (7,6 mm) each cable | \$6400 | - | SunRunner® 4 EZ Clip 100 Pack | 1.33 x .50 | 33,8 x 12,7 | .36 | 9,1 | |
| | | | | \$6440 | - | SunRunner® 4 EZ Clip Bulk | | | | | | |




SunRunner®

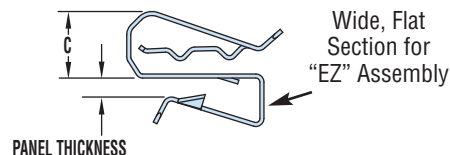

SunRunner® EZ



SunRunner® 4



SunRunner® 4 EZ



SunRunner® EZ with (optional)
UL Approved SunBundler (page 1-11)
looped through slot

*Quick
Specs*

| | |
|-------------------|---|
| Material | .025" thick 304 or 316 stainless steel (SunRunner and SunRunner EZ) .020" thick 410 stainless steel (SunRunner 4 and SunRunner 4 EZ) |
| Certifications | Certified by UL for Compliance with both Canadian and US Requirements under File E54523 |
| Temperature Range | -40°F (-40°C) to 572°F (300°C) |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[3799](#) [3780](#) [3796](#) [3782](#) [3795](#) [3793](#) [3797](#) [3779](#) [3778](#) [4165](#) [4163](#) [4171](#) [4162](#) [4167](#) [4173](#) [4170](#) [4172](#) [4158](#)
[4157](#) [4166](#) [4161](#) [4155](#) [4160](#) [4168](#) [4156](#)