

ADAPTERS, BETWEEN SERIES DC - 12.4 GHz TYPE N / SMA BULKHEAD MOUNT



MODELS: 5351


SPECIFICATIONS:

Electrical:

Frequency Range _____ DC - 12.4 GHz
VSWR: _____ 1.25:1 Max.
Impedance _____ 50 Ohms
Operating Temp. Range _____ -45°C to +155°C


Mechanical:

Connectors _____ Nickel Plated Brass
(Mates with MIL-STD-348)
Conductors _____ Gold Plated Beryllium Copper
Nut & Washer _____ Passivated Stainless Steel

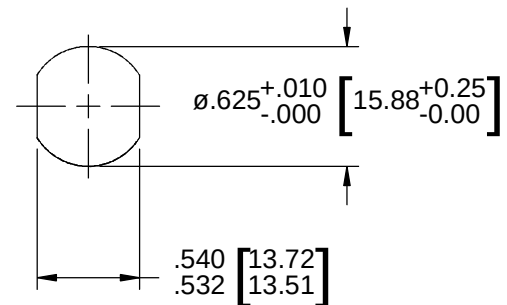

Recommended Panel
Configuration

Model Number: **5351**
Type N Female / SMA Female

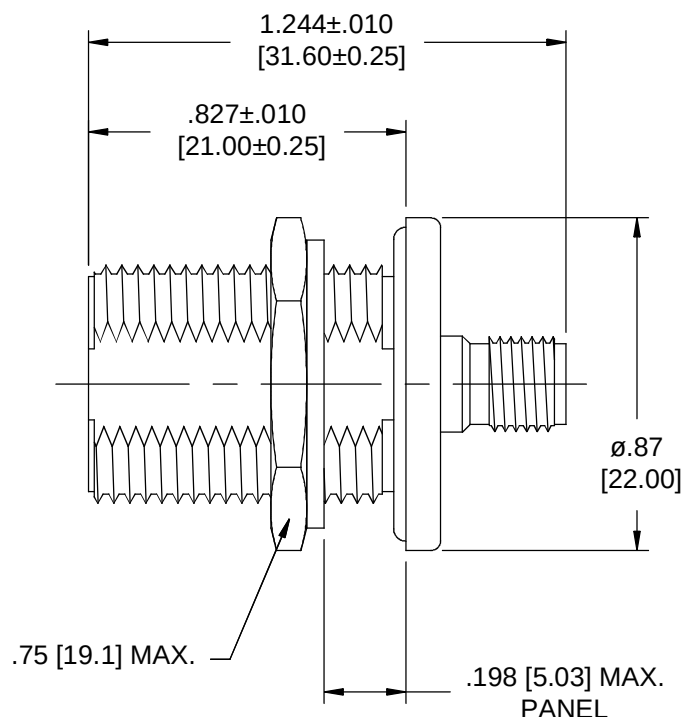

Panel Nut and Lock Washer are Shipped Unassembled.

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design specifications are subject to change without notice.
Contact factory for technical specifications before purchasing or use.

5351; REV A

300 Dino Drive • Ann Arbor, MI 48103-9457 U.S.A. • 888-244-6638 or 734-426-5553 • FAX 734-426-5557 • inmet.apitech.com