


- 1 ASSEMBLIES MAY BE BROKEN TO DESIRED NO OF POSITIONS.
- 2 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT.
- 3 .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
- 4 .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 5 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 6 HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK.
- 7 .000100-.000200 MATTE TIN OVER .000050 NICKEL.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

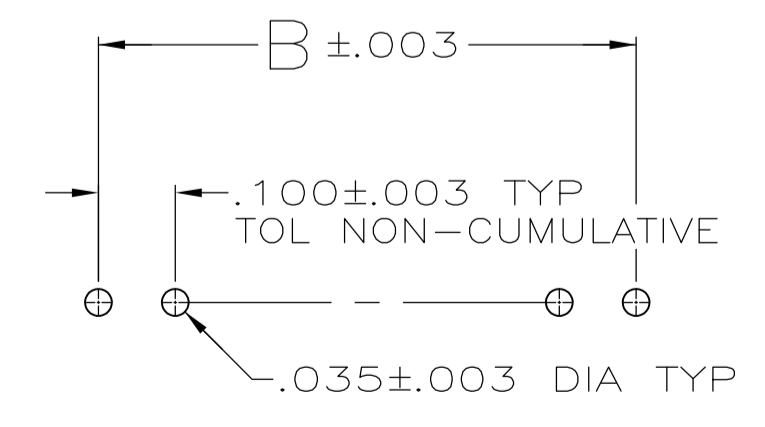

RECOMMENDED HOLE LAYOUT

PLATING	C	B	A	NO OF POSN	PART NUMBER	PLATING	C	B	A	NO OF POSN	PART NUMBER
					9-103329-0						
					8-103329-9						
					8-103329-8						
					8-103329-7						
					8-103329-6						
					8-103329-5						
					8-103329-4						
					8-103329-3						
					8-103329-2						
					8-103329-1						
					8-103329-0						
					7-103329-9						
					7-103329-8						
					7-103329-7						
					7-103329-6						
					7-103329-5						
					7-103329-4						
					7-103329-3						
					7-103329-2						
					7-103329-1						
					7-103329-0						
					6-103329-9						
					6-103329-8						
					6-103329-7						
					6-103329-6						
					6-103329-5						
					6-103329-4						
					6-103329-3						
					6-103329-2						
					6-103329-1						
					6-103329-0						
					5-103329-9						
					5-103329-8						
					5-103329-7						
					5-103329-6						
					5-103329-5						
					5-103329-4						
					5-103329-3						
					5-103329-2						
					5-103329-1						
					5-103329-0						
					4-103329-2						
					4-103329-1						
					4-103329-0						
					3-103329-9						
					3-103329-8						
					3-103329-7						
					3-103329-6						
					3-103329-5						
					3-103329-4						
					3-103329-3						
					3-103329-2						
					3-103329-1						
					3-103329-0						
					2-103329-9						
					2-103329-8						
					2-103329-7						
					2-103329-6						
					2-103329-5						
					2-103329-4						
					2-103329-3						
					2-103329-2						
					2-103329-1						
					2-103329-0						
					1-103329-9						
					1-103329-8						
					1-103329-7						
					1-103329-6						
					1-103329-5						
					1-103329-4						
					1-103329-3						
					1-103329-2						
					1-103329-1						
					1-103329-0						
					1-103329-9						
					1-103329-8						
					1-103329-7						
					1-103329-6						
					1-103329-5						
					1-103329-4						
					1-103329-3						
					1-103329-2						
					1-103329-1						
					1-103329-0						
					1-103329-9						
					1-103329-8						
					1-103329-7						
					1-103329-6						
					1-103329-5						
					1-103329-4						
					1-103329-3						
					1-103329-2						
					1-103329-1						
					1-103329-0						
					1-103329-9						
					1-103329-8						
					1-103329-7						
					1-103329-6						
					1-103329-5						
					1-103329-4						
					1-103329-3						
					1-103329-2						
					1-103329-1						
					1-103329-0						

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES. TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± .005
1 PLC	± .005
2 PLC	± .005
3 PLC	± .005
4 PLC	± .005
ANGLES	± .005

MATERIAL: POST: COPPER ALLOY. FINISH: SEE TABLE.

APPROVED: J. MARTINELLI, J. JOHN KNITTLE, B. FLINCHBAUGH.

DATE: 16OCT92, 23NOV92, 23NOV92.

NAME: ASSEMBLY, HEADER, BREAKAWAY, MOD II, SINGLE ROW, .100 C/L, RIGHT ANGLE, WITH .025 SQUARE POSTS.

APPLICATION SPEC: A100779C=103329.

SIZE: A1. CAGE CODE: 00779. DRAWING NO: 103329.

WEIGHT: —. RESTRICTED TO: —.

CUSTOMER DRAWING. SCALE: 4:1. SHEET: 1 OF 1. REV: J4.