

MULTIFUNCTION TIME RELAY IN CAGE-CLAMP TECH. 1
CHANGEOVER,
8 FUNCTIONS AC/DC 24V...240V

General technical details:		
product brand name		SIRIUS
product designation		timing relay
Protection class IP / on the front		IP40
Protection class IP / of the terminal		IP20
mounting position		any
Supply voltage frequency		
<ul style="list-style-type: none"> • 1 / for auxiliary and control current circuit • initial rated value • final rated value 	Hz	50
	Hz	60
Product function		
<ul style="list-style-type: none"> • star-delta circuit • with auxiliary voltage / pulse-shaping • at the relay outputs / changeover delayed/without delay 		No
		Yes
		No
Product component / semi-conductor output		No
Product extension / optional / remote control		No
Product extension / strictly required / remote control		No
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature		
<ul style="list-style-type: none"> • during storage • during operating • during transport 	°C	-40 ... +85
	°C	-25 ... +60
	°C	-40 ... +85
Relative humidity		
<ul style="list-style-type: none"> • during operating phase 	%	15 ... 70
Conductor-bound parasitic coupling BURST / according to IEC 61000-4-4		2 kV network connection / 1 kV control connection
Conductor-bound parasitic coupling conductor-earth SURGE / according to IEC 61000-4-5		2 kV
Conductor-bound parasitic coupling conductor-conductor SURGE / according to IEC 61000-4-5		1 kV
Electrostatic discharge / according to IEC 61000-4-2		4 kV contact discharge / 8 kV air discharge
Field-bound parasitic coupling / according to IEC 61000-4-3		10 V/m
Resistance against vibration		10 ... 55 Hz / 0.35 mm

Impulse voltage resistance / rated value	V	4,000
Insulation voltage / rated value	V	300
Active power loss / total / typical	W	2
Item designation / according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		K
Item designation / according to DIN EN 61346-2		K
Category / according to EN 954-1		none
Protection against electrical shock		finger-safe

Switching Function:

Switching function

• slow-operating	Yes
• making pulse contact	No
• firmly clocked beginning with pulse	No
• firmly clocked beginning with pause	Yes
• relapse delayed	Yes
• variably clocked start with impulse	No
• impuls variably clocked start with pause	No
• with auxiliary voltage	
• in an additive way slow-operating	Yes
• temporary line fault	Yes
• relapse delayed	Yes
• without auxiliary voltage / relapse delayed	No
• slow-operating/instantaneous contact	No
• with auxiliary voltage	
• relapse delayed/instantaneous contact	No
• slow-operating/relapse delayed/instantaneous contact	No
• firmly clocked beginning with pause/instantaneous contact	No
• making pulse contact/instantaneous contact	No
• with auxiliary voltage	
• temporary line fault/instantaneous contact	No
• pulse modelling/instantaneous contact	No
• slow-operating/instantaneous contact	No

General details:

Type of voltage / of the controlled supply voltage		AC/DC
Control supply voltage frequency		
• 1	Hz	50 ... 60
Control supply voltage		
• 1		
• at 50 Hz		

<ul style="list-style-type: none"> • for AC 	V	24 ... 240
<ul style="list-style-type: none"> • at 60 Hz 	V	24 ... 240
<ul style="list-style-type: none"> • for AC 	V	24 ... 240
<ul style="list-style-type: none"> • for DC 		
Operating range factor control supply voltage rated value		
<ul style="list-style-type: none"> • at 50 Hz 		0.8 ... 1.1
<ul style="list-style-type: none"> • for AC 		0.8 ... 1.1
<ul style="list-style-type: none"> • at 60 Hz 		0.8 ... 1.1
<ul style="list-style-type: none"> • for AC 		0.8 ... 1.1
<ul style="list-style-type: none"> • for DC 		0.7 ... 1.1

Auxiliary circuit:

Operating current / of auxiliary contacts

<ul style="list-style-type: none"> • as normally closed contact / for AC-15 	A	3
<ul style="list-style-type: none"> • at 24 V 	A	3
<ul style="list-style-type: none"> • at 250 V 	A	3
<ul style="list-style-type: none"> • as normally open contact / for AC-15 	A	3
<ul style="list-style-type: none"> • at 24 V 	A	3
<ul style="list-style-type: none"> • at 250 V 	A	3
<ul style="list-style-type: none"> • at AC-15 	A	3
<ul style="list-style-type: none"> • maximum 	A	3
<ul style="list-style-type: none"> • at DC-13 	A	1
<ul style="list-style-type: none"> • at 24 V 	A	0.2
<ul style="list-style-type: none"> • at 125 V 	A	0.1
<ul style="list-style-type: none"> • at 250 V 	A	0.1
Number of NC contacts / delayed switching		0
Number of NC contacts / non-delayed		0
Number of NO contacts / delayed switching		0
Number of NO contacts / non-delayed		0
Number of change-over switches / delayed switching		1
Number of change-over switches / non-delayed		0

Short-circuit:

Design of the fuse link / for short-circuit protection of the auxiliary switch / required		fuse gL/gG: 4 A
Type of mounting		screw and snap-on mounting onto 35 mm standard mounting rail

Installation/mounting/dimensions:

Width	mm	22.5
Height	mm	103
Depth	mm	91

Distance, to be maintained, to the ranks assembly		
• upwards	mm	0
• forwards	mm	0
• sideways	mm	0
• backwards	mm	0
• downwards	mm	0
Distance, to be maintained, to earthed part		
• backwards	mm	0
• sideways	mm	0
• upwards	mm	0
• forwards	mm	0
• downwards	mm	0
Distance, to be maintained, conductive elements		
• downwards	mm	0
• backwards	mm	0
• sideways	mm	0
• forwards	mm	0
• upwards	mm	0

Connections:

Design of the snap-on socket base		none
Design of the electrical connection		No spring-loaded terminals
• jumper socket		
• for auxiliary and control current circuit		
Type of the connectable conductor cross-section / for auxiliary contacts / solid		2x (0.25 ... 1.5 mm ²)
Conductor cross-section that can be connected / for auxiliary contact / solid		
• minimum	mm ²	0.25
• maximum	mm ²	1.5
Type of the connectable conductor cross-section / for auxiliary contacts / finely stranded / with conductor end processing		2x (0.25 ... 1.5 mm ²)
Conductor cross-section that can be connected / for auxiliary contact / finely stranded / with conductor end processing		
• minimum	mm ²	0.25
• maximum	mm ²	1.5
Type of the connectable conductor cross-section / for auxiliary contacts / finely stranded / without conductor final cutting		2x (0.25 ... 1.5 mm ²)
Conductor cross-section that can be connected / for auxiliary contact / finely stranded / without conductor final cutting		
• minimum	mm ²	0.25
• maximum	mm ²	1.5

Type of the connectable conductor cross-section / for AWG conductors / for auxiliary contacts	2x (24 ... 16)
AWG number / as coded connectable conductor cross-section / for auxiliary contact	
<ul style="list-style-type: none"> • minimum • maximum 	<p>24</p> <p>16</p>

Certificates/approvals:

Verification of suitability	CE / UL / CSA
-----------------------------	---------------

General Product Approval	Declaration of Conformity	Test Certificates
 CCC  CSA  GOST  UL	 CE EG-Konf.	Special Test Certificate



Shipping Approval

 BUREAU VERITAS  DNV  GL  LRS  PRS  RINA

Shipping Approval	other
 RMRS	Confirmation other Environmental Confirmations

Further information:

- Information- and Downloadcenter (Catalogs, Brochures,...)**
<http://www.siemens.com/industrial-controls/catalogs>
- Industry Mall (Online ordering system)**
<http://www.siemens.com/industrial-controls/mall>
- CAX-Online-Generator**
<http://www.siemens.com/cax>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
<http://support.automation.siemens.com/WW/view/en/3RP1505-2AW30/all>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RP1505-2AW30

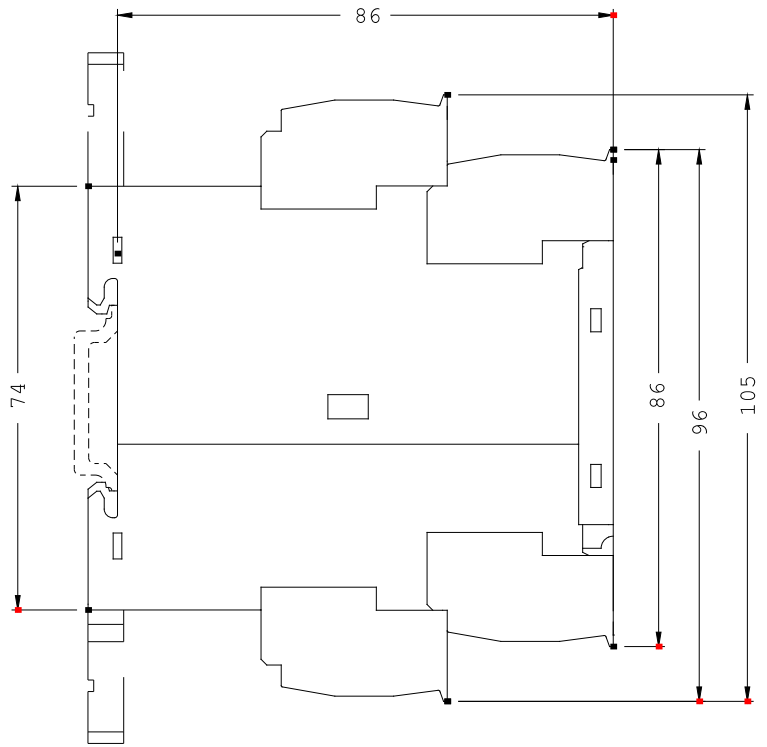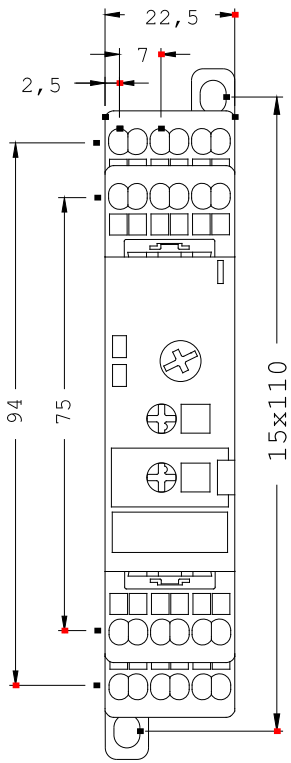

last change:

Mar 5, 2013