
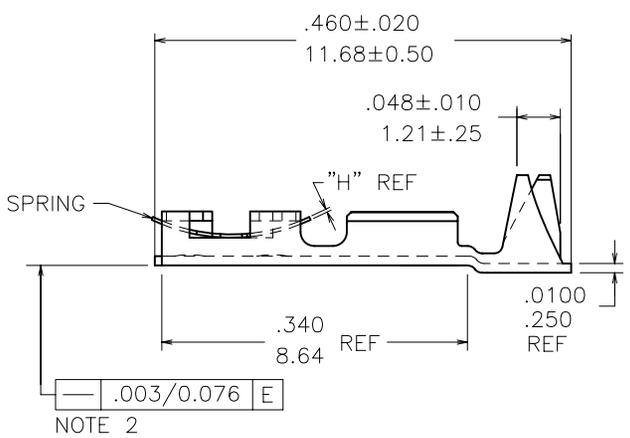
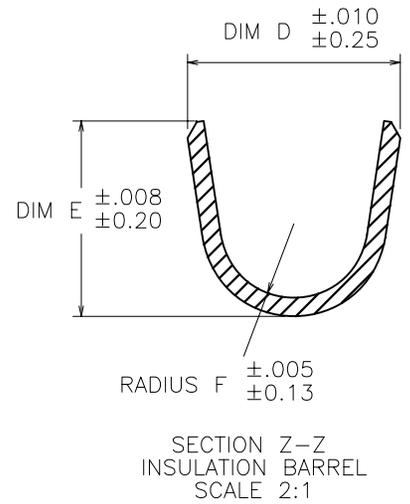
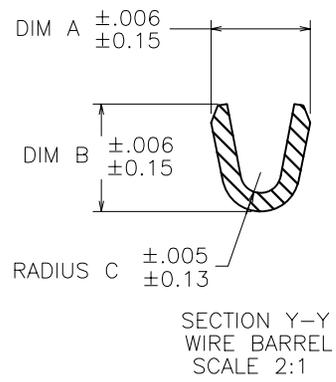
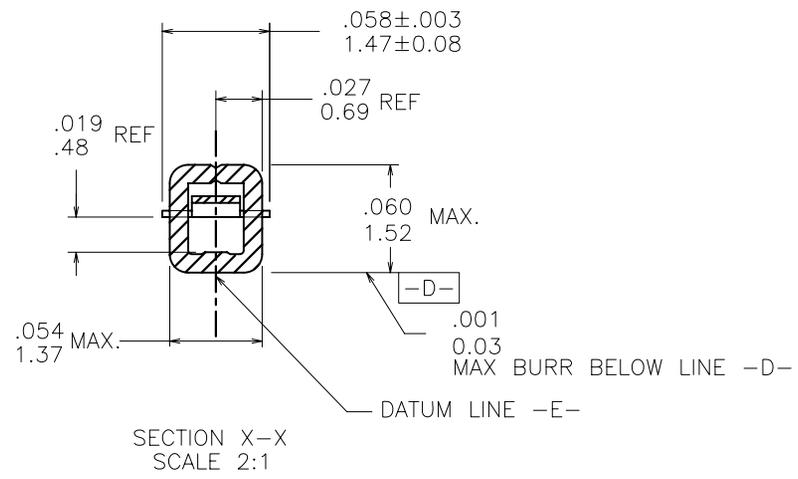


PRODUCT NUMBER
SEE SHEET 3

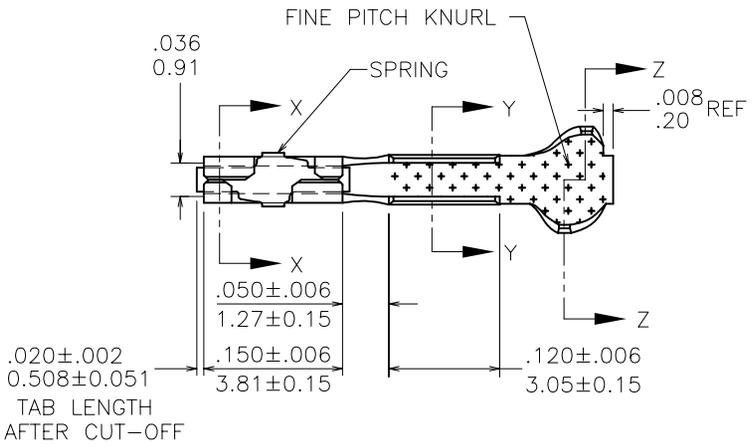

NOTE 2
.003/0.076 E

| mat'l. code | | | | surface | | tolerance | | projection | | product family | |
|-------------|----------|-----|------------|---------------------------------------|--------------|---------------------------------------|-----------|------------|-------------------------------|----------------|--|
| SEE TABLE | | | | ✓ | | tolerances unless otherwise specified | | INCH/MM | | PV TERMINALS | |
| ltr | ecn no | dr | date | tolerances unless otherwise specified | | | | | | title | |
| AG | v07-0218 | HTB | 2007-03-16 | angles | linear | .XX±.01/.X±.3 | | | MINI PV™ RECEPTACLE | | |
| - | - | - | - | | | .XXX±.005/.XX±.13 | | | CRIMP TO WIRE | | |
| AB | v05-0447 | HTB | 2005-05-12 | | | .XXXX±.0020/.XXX±.051 | scale 5:1 | | sheet 1 of 6 size | | |
| AC | v05-0517 | HTB | 2005-05-24 | dr | T. BREWBAKER | 2006-04-18 | | | dwg no | | |
| AD | v05-0530 | HTB | 2005-05-31 | engr | T. BREWBAKER | 2006-04-18 | | | 47212 | | |
| AE | v06-0197 | HTB | 2006-03-03 | chr | T. BREWBAKER | 2006-04-18 | | | A3 | | |
| AF | v06-0303 | HTB | 2006-04-18 | appd | T. BREWBAKER | 2006-04-18 | | | type Product Customer Drawing | | |
| sheet | revision | AG | AG | AG | AG | AG | AG | | | | |
| index | sheet | 1 | 2 | 3 | 4 | 5 | 6 | | | | |

| PRODUCT NUMBER SEE SHEET 3 | WIRE BARREL | | | INSULATION BARREL | | | | |
|-------------------------------|--------------|-----------|-----------|-------------------|------------------------------|-----------|-----------|-----------|
| | AWG RANGE | DIM A | DIM B | RADIUS C | INSULATION DIAMETER RANGE | DIM D | DIM E | RADIUS F |
| | 18-20 | .104/2.64 | .104/2.64 | .021/.53 | .042/1.07-.103/2.62 | .139/3.53 | .120/3.05 | .050/1.27 |
| | 22-26 | .070/1.78 | .070/1.78 | .017/.43 | .036/.91-.103/2.62 | .139/3.53 | .120/3.05 | .050/1.27 |
| | 28-32 | .054/1.37 | .058/1.47 | .011/.28 | .028/.71-.054/1.37 | .115/2.92 | .105/2.67 | .040/1.02 |

NOTES:

1. TERMINAL MATES WITH $.025 \pm .002 / 0.64 \pm 0.05$ SQUARE OR ROUND PIN.
- ② WHEN MEASURED ALONG DATUM -E- WITHIN $.340 / 8.64$ REF DIM.
3. PRODUCT SPECIFICATION: BUS-12-067.
APPLICATION SPECIFICATIONS:
TA-75: TERMINAL DATA FOR USE WITH MINI LATCH HOUSING.
TA-146: TERMINAL DATA FOR CONTACTS NOT USED IN HOUSINGS.
TA-210: TERMINAL DATA FOR CONTACTS USED WITH MINI ROD HOUSINGS.
TA-228: APPLICATIONS USING 20 AWG WIRE.
TA-531: INSTALLING AND REMOVING TERMINALS.
- ④ ADD AN LF SUFFIX TO PART NUMBERS FOR PRODUCT THAT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
NOT AVAILABLE FOR TIN-LEAD PRODUCT.
5. THIS PRODUCT IS NOT INTENDED TO BE EXPOSED TO MANUFACTURING SOLDERING PROCESSES.
- ⑥ THIS PRODUCT HAS 100% TIN PLATING IN THE INTERFACE AND HAS NOT BEEN TESTED FOR WHISKER GROWTH IN ALL INTERCONNECT ENVIRONMENTS.



FCconnect.com

Copyright FCJ

| | | | | | | | |
|--------------------------|----------|----|------|---------------------------------------|---|----------------------|--|
| mat'l. code SEE TABLE | | | | surface | tolerance | projection | product family |
| ltr | ecr no | dr | date | tolerances unless otherwise specified | | INCH/MM scale 1:1 | PV TERMINALS |
| AG | | | | angles | .XX±.01/.X±.3 | | MINI PV™ RECEPTACLE CRIMP TO WIRE |
| | | | | linear | .XXX±.005/.XX±.13 XXXX±.0020/.XXX±.051 | | |
| | | | | dr | T. BREWBAKER | 2006-04-18 | sheet 2 of 6 |
| | | | | engr | T. BREWBAKER | 2006-04-18 | size |
| | | | | chr | T. BREWBAKER | 2006-04-18 | 47212 A3 |
| | | | | appd | T. BREWBAKER | 2006-04-18 | |
| sheet | revision | | | | | | type |
| index | sheet | | | | | | Product Customer Drawing |

| MATERIAL & PLATING | | SPRING THICKNESS DIM H±.0005/0.012 | AWG RANGE | REELED NOTE 4 | LOOSE NOTE 4 | PLATING AVAILABILITY | | | | | | | |
|---|--------------|---------------------------------------|--------------|------------------|-----------------|----------------------|--------|------|--------|------|--------|------|------|
| 1/4 HARD BRASS BODY | Be/Cu SPRING | | | | | -000 | -000LF | -001 | -001LF | -002 | -002LF | | |
| UNDERPLATING: 50μ"/1.27μ Ni CONTACT AREA: 15μ"/0.38μ Au INSIDE BOX AREA: -000 Au FLASH -001LF 15μ"/0.38μ Au -002LF 6μ"/0.15μ Au REMAINDER: -000 Au FLASH -001LF 15μ"/0.38μ Au -002LF Au FLASH | Au FLASH | .0035/0.089 | 18-20 | 48241 | 48250 | YES | YES | NO | NO | NO | NO | | |
| | | | 22-26 | 48242 | 48251 | YES | YES | NO | NO | NO | NO | | |
| | | | 28-32 | 48243 | 48252 | YES | YES | NO | NO | NO | NO | | |
| | | .0048/0.122 | 18-20 | 48244 | 48253 | YES | YES | NO | NO | NO | NO | | |
| | | | 22-26 | 48245 | 48254 | YES | YES | NO | NO | NO | NO | YES* | |
| | | | 28-32 | 48246 | 48255 | YES | YES | NO | NO | NO | NO | | |
| | | .0058/0.147 | 18-20 | 94011 | 94014 | NO | NO | NO | NO | NO | NO | NO | OBS. |
| | | | 22-26 | 94012 | 94015 | NO | NO | NO | NO | NO | NO | NO | OBS. |
| | | | 28-32 | 94013 | 94016 | NO | NO | NO | NO | NO | NO | NO | OBS. |
| | | .0065/0.165 | 18-20 | 48247 | 48256 | YES | YES | NO | NO | NO | NO | YES* | |
| | | | 22-26 | 48248 | 48257 | YES | YES | NO | NO | NO | NO | YES* | |
| | | | 28-32 | 48249 | 48258 | YES | YES | NO | NO | NO | NO | NO | |
| UNDERPLATING: 50μ"/1.27μ Ni CONTACT AREA: 30μ"/0.76μ Au INSIDE BOX AREA: -000 Au FLASH -001LF 30μ"/0.76μ Au -002LF 20μ"/0.50μ Au REMAINDER: -000 Au FLASH -001LF 30μ"/0.76μ Au -002LF 8μ"/0.20μ Au | Au FLASH | .0035/0.089 | 18-20 | 48231 | 48266 | YES | YES | NO | NO | NO | NO | | |
| | | | 22-26 | 48049 | 48235 | YES | YES | NO | NO | NO | NO | YES | |
| | | | 28-32 | 48048 | 48238 | YES | YES | NO | NO | NO | NO | YES | |
| | | .0048/0.122 | 18-20 | 48047 | 48232 | YES | YES | NO | NO | NO | NO | YES | |
| | | | 22-26 | 48046 | 48234 | YES | YES | NO | NO | NO | NO | YES | |
| | | | 28-32 | 48045 | 48237 | YES | YES | NO | YES | NO | NO | YES | |
| | | .0058/0.147 | 18-20 | 94017 | 94019 | NO | NO | NO | NO | NO | NO | NO | OBS. |
| | | | 22-26 | 94018 | 94020 | NO | NO | NO | NO | NO | NO | NO | OBS. |
| | | | 28-32 | 93259 | 94021 | NO | NO | NO | NO | NO | NO | NO | OBS. |
| | | .0065/0.165 | 18-20 | 48052 | 48233 | YES | YES | NO | NO | NO | NO | YES* | |
| | | | 22-26 | 48051 | 48236 | YES | YES | NO | NO | NO | NO | YES | |
| | | | 28-32 | 48050 | 48239 | YES | YES | NO | NO | NO | NO | YES | |

* LOOSE PIECE NOT AVAILABLE



Copyright FCI

| | | | | | | | | | | | |
|--------------------------|----------------|----|------|---------------------------------------|--------------|---|--|-----------------|--|--------------------------------------|--|
| mat'l. code SEE TABLE | | | | surface ✓ | | tolerance | | projection ⊕ | | product family PV TERMINALS | |
| ltr | ec'n no | dr | date | tolerances unless otherwise specified | | | | title | | MINI PV™ RECEPTACLE CRIMP TO WIRE | |
| AG | | | | angles | linear | .XX±.01/.X±.3 .XXX±.005/.XX±.13 XXXX±.0020/XXX±.051 | | INCH/MM | | sheet 3 of 6 size | |
| | | | | | | scale 1:1 | | FCI | | A3 | |
| | | | | dr | T. BREWBAKER | 2006-04-18 | | dwg no | | 47212 | |
| | | | | engr | T. BREWBAKER | 2006-04-18 | | type | | Product Customer Drawing | |
| | | | | chr | T. BREWBAKER | 2006-04-18 | | | | | |
| | | | | appd | T. BREWBAKER | 2006-04-18 | | | | | |
| sheet index | revision sheet | | | | | | | | | | |

| MATERIAL & PLATING | | SPRING THICKNESS DIM H±.0005/0.012 | AWG RANGE | REELED NOTE 4 | LOOSE NOTE 4 | PLATING AVAILABILITY | | | | | | OBS. |
|--|--------------|---------------------------------------|--------------|------------------|-----------------|----------------------|--------|------|--------|------|--------|------|
| 1/4 HARD BRASS BODY | Be/Cu SPRING | | | | | -000 | -000LF | -001 | -001LF | -002 | -002LF | |
| UNDERPLATING: 50µ"/1.27µ Ni CONTACT AREA: 40µ"/1.02µ Au INSIDE BOX AREA: -000 Au FLASH -001LF 40µ"/1.02µ Au -002LF 30µ"/0.76µ Au REMAINDER: -000 Au FLASH -001LF 40µ"/1.02µ Au -002LF 15µ"/0.38µ Au | Au FLASH | .0035/0.089 | 18-20 | 48276 | N/A | NO | NO | NO | NO | NO | NO | OBS. |
| | | | 22-26 | 47457 | 47743 | YES | YES | NO | YES | NO | YES | |
| | | | 28-32 | 47456 | 47742 | YES | YES | NO | YES | NO | YES | |
| | | .0048/0.122 | 18-20 | 47441 | 47713 | YES | YES | NO | YES | NO | YES | |
| | | | 22-26 | 47439 | 47712 | YES | YES | NO | YES | NO | YES | |
| | | | 28-32 | 47437 | 47711 | YES | YES | NO | YES | NO | YES | |
| | | .0058/0.147 | 18-20 | 94022 | 94025 | NO | NO | NO | NO | NO | NO | OBS. |
| | | | 22-26 | 94023 | 94026 | NO | NO | NO | NO | NO | NO | OBS. |
| | | | 28-32 | 94024 | 94027 | NO | NO | NO | NO | NO | NO | OBS. |
| | | .0065/0.165 | 18-20 | 47566 | 47746 | YES | YES | NO | YES | NO | YES | |
| | | | 22-26 | 47565 | 47745 | YES | YES | NO | YES | NO | YES | |
| | | | 28-32 | 47564 | 47744 | YES | YES | NO | YES | NO | YES | |
| DISCONTINUED | | | | 48191 | 48194 | | | | | | | |
| DISCONTINUED | | | | 48192 | 48195 | | | | | | | |
| DISCONTINUED | | | | 48193 | 48196 | | | | | | | |
| UNDERPLATING: 50µ"/1.27µ Ni CONTACT AREA: 75µ"/1.91µ Au INSIDE BOX AREA: -000 Au FLASH -001LF 75µ"/1.91µ Au -002LF 30µ"/0.76µ Au REMAINDER: -000 Au FLASH -001LF 75µ"/1.91µ Au -002LF 15µ"/0.38µ Au | Au FLASH | .0035/0.089 | 18-20 | 47785 | 48014 | YES | YES | NO | NO | NO | NO | OBS. |
| | | | 22-26 | 47784 | 48015 | NO | NO | NO | NO | NO | NO | NO |
| | | | 28-32 | 47783 | 48013 | NO | NO | NO | YES | NO | NO | |
| | | .0048/0.122 | 18-20 | 47220 | 47707 | NO | NO | NO | NO | NO | NO | OBS. |
| | | | 22-26 | 47216 | 47706 | YES | YES | NO | YES | NO | NO | |
| | | | 28-32 | 47212 | 47705 | YES | YES | NO | YES | NO | NO | |
| | | .0058/0.147 | 18-20 | 94028 | 94031 | NO | NO | NO | NO | NO | NO | OBS. |
| | | | 22-26 | 94029 | 94032 | NO | NO | NO | NO | NO | NO | OBS. |
| | | | 28-32 | 94030 | 94033 | NO | NO | NO | NO | NO | NO | OBS. |



Copyright FCI

| | | | | | | | |
|--------------------------|----------------|----|------|---------------------------------------|-------------------------|-----------------|--------------------------------------|
| mat'l. code SEE TABLE | | | | surface ✓ | tolerance | projection ⊕ | product family PV TERMINALS |
| ltr | ecn no | dr | date | tolerances unless otherwise specified | | INCH/MM | title |
| AG | | | | angles | .XX±.01/.X±.3 | scale 1:1 | MINI PV™ RECEPTACLE CRIMP TO WIRE |
| | | | | linear | .XXX±.005/.XX±.13 | | |
| | | | | | XXXX±.0020/.XXX±.051 | | |
| | | | | dr | T. BREWBAKER 2006-04-18 | | dwg no |
| | | | | engr | T. BREWBAKER 2006-04-18 | | sheet 4 of 6 |
| | | | | chr | T. BREWBAKER 2006-04-18 | | size |
| | | | | appd | T. BREWBAKER 2006-04-18 | | A3 |
| sheet index | revision sheet | | | | | | type Product Customer Drawing |

| MATERIAL & PLATING | | SPRING THICKNESS DIM H±.0005/0.012 | AWG RANGE | REELED NOTE 4 | LOOSE NOTE 4 | PLATING AVAILABILITY | | | | | | | | |
|---|--------------|--|--------------|------------------|-----------------|----------------------|--------|------|--------|------|--------|------|------|----|
| 1/4 HARD BRASS BODY | Be/Cu SPRING | | | | | -000 | -000LF | -001 | -001LF | -002 | -002LF | | | |
| PRE-PLATED: UNDERPLATING: 50μ"/1.27μ" Ni OVERPLATING: 100-200μ"/2.54-5.08μ" 60/40 TIN LEAD "LF NOT AVAILABLE" SEE LEAD-FREE EQUIVALENTS BELOW | Sn PLATED | .0035/0.089 | 22-26 | 47445 | 47747 | NO | NO | NO | NO | NO | NO | OBS. | | |
| | | | 28-32 | 47446 | 47748 | NO | NO | NO | NO | NO | NO | NO | OBS. | |
| | | .0048/0.122 | 18-20 | 47221 | 47716 | NO | NO | NO | NO | NO | NO | NO | OBS. | |
| | | | 22-26 | 47217 | 47715 | NO | NO | NO | NO | NO | NO | NO | OBS. | |
| | | .0058/0.147 | 28-32 | 47213 | 47714 | NO | NO | NO | NO | NO | NO | NO | OBS. | |
| | | | 18-20 | 94034 | 94037 | NO | NO | NO | NO | NO | NO | NO | OBS. | |
| | | .0065/0.165 | 22-26 | 94035 | 94038 | NO | NO | NO | NO | NO | NO | NO | OBS. | |
| | | | 28-32 | 94036 | 94039 | NO | NO | NO | NO | NO | NO | NO | OBS. | |
| | | | 18-20 | 47648 | 47749 | NO | NO | NO | NO | NO | NO | NO | OBS. | |
| | | | 22-26 | 47649 | 47750 | NO | NO | NO | NO | NO | NO | NO | OBS. | |
| | | PRE-PLATED: 100-160μ"/2.54-4.06μ" Sn (LEAD-FREE) NOTE 6 | Sn PLATED | .0035/0.089 | 22-26 | 47445 | 47747 | NO | YES | NO | NO | NO | NO | |
| | | | | | 28-32 | 47446 | 47748 | NO | YES | NO | NO | NO | NO | NO |
| .0048/0.122 | 18-20 | | | 47221 | 47716 | NO | YES | NO | NO | NO | NO | NO | | |
| | 22-26 | | | 47217 | 47715 | NO | YES | NO | NO | NO | NO | NO | | |
| .0058/0.147 | 28-32 | | | 47213 | 47714 | NO | YES | NO | NO | NO | NO | NO | | |
| | 18-20 | | | 94034 | 94037 | NO | NO | NO | NO | NO | NO | NO | OBS. | |
| .0065/0.165 | 22-26 | | | 94035 | 94038 | NO | NO | NO | NO | NO | NO | NO | OBS. | |
| | 28-32 | | | 94036 | 94039 | NO | NO | NO | NO | NO | NO | NO | OBS. | |



FCconnect.com

Copyright FCJ

| | | | | | | | | | | | |
|--------------------------|----------------|----|------|---|--------------|-----------------------|-----------|------------|-------------------------------|--------------------------------------|--|
| mat'l. code SEE TABLE | | | | surface <input checked="" type="checkbox"/> | | tolerance | | projection | | product family PV TERMINALS | |
| ltr | ecr no | dr | date | tolerances unless otherwise specified | | | | title | | MINI PV™ RECEPTACLE CRIMP TO WIRE | |
| AG | | | | angles | linear | .XX±.01/.X±.3 | INCH/MM | | sheet 5 of 6 size | | |
| | | | | | | .XXX±.005/.XX±.13 | scale 1:1 | | A3 | | |
| | | | | | | .XXXX±.0020/.XXX±.051 | | | 47212 | | |
| | | | | dr | T. BREWBAKER | 2006-04-18 | | | type Product Customer Drawing | | |
| | | | | engr | T. BREWBAKER | 2006-04-18 | | | | | |
| | | | | chr | T. BREWBAKER | 2006-04-18 | | | | | |
| | | | | appd | T. BREWBAKER | 2006-04-18 | | | | | |
| sheet index | revision sheet | | | | | | | | | | |

| MATERIAL & PLATING | | SPRING THICKNESS DIM H±.0005/0.012 | AWG RANGE | REELED NOTE 4 | LOOSE-PIECE NOTE 4 | |
|---|--------------|---------------------------------------|--------------|------------------|-----------------------|------|
| 1/4 HARD BRASS BODY | Be/Cu SPRING | | | | | |
| UNDERPLATING: 50u" X 1.27u" Ni CONTACT AREA: 30u" / 0.76u" GXT INSIDE BOX AREA: -600 Au FLASH REMAINDER: -600 Au FLASH | Au FLASH | .0035/0.089 | 18-20 | 48231-600 | 48266-600 | OBS. |
| | | | 22-26 | 48049-600 | 48235-600 | OBS. |
| | | | 28-32 | 48048-600 | 48238-600 | OBS. |
| | | .0048/0.122 | 18-20 | 48047-600 | 48232-600 | OBS. |
| | | | 22-26 | 48046-600 | 48234-600 | OBS. |
| | | | 28-32 | 48045-600 | 48237-600 | OBS. |
| | | .0058/0.147 | 18-20 | 94017-600 | 94019-600 | OBS. |
| | | | 22-26 | 94018-600 | 94020-600 | OBS. |
| | | | 28-32 | 93259-600 | 94021-600 | OBS. |
| | | .0065/0.165 | 18-20 | 48052-600 | 48233-600 | OBS. |
| | | | 22-26 | 48051-600 | 48236-600 | OBS. |
| | | | 28-32 | 48050-600 | 48239-600 | OBS. |



FCconnect.com

Copyright FCJ

| | | | | | | | |
|--------------------------|----------|----|------|---------------------------------------|----------------------|------------|--------------------------|
| mat'l. code SEE TABLE | | | | surface | tolerance | projection | product family |
| ltr | ecn no | dr | date | tolerances unless otherwise specified | | | PV TERMINALS |
| AG | | | | angles | linear | INCH/MM | title |
| | | | | | .XX±.01/.X±.3 | | MINI PV™ RECEPTACLE |
| | | | | | .XXX±.005/.XX±.13 | scale 1:1 | CRIMP TO WIRE |
| | | | | | XXXX±.0020/.XXX±.051 | | dwg no |
| | | | | dr | T. BREWBAKER | 2006-04-18 | sheet 6 of 6 |
| | | | | engr | T. BREWBAKER | 2006-04-18 | size |
| | | | | chr | T. BREWBAKER | 2006-04-18 | 47212 |
| | | | | appd | T. BREWBAKER | 2006-04-18 | A3 |
| sheet | revision | | | | | | type |
| index | sheet | | | | | | Product Customer Drawing |