


IEC Appliance Outlet F Shuttered, Screw-on Mounting, Front Side, Solder or Quick-connect Terminal



4721



Description

- Panel Mount Screw-on mounting from front side
- Connector shuttered , Protection class I , Pin temperature 70 °C
- Solder terminals or quick connect terminals

Approvals

- VDE Certificate Number: 40030185
- UL File Number: E96454
- CCC File Number: 2012010204576598

Other versions on request

- For protection class II

Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#)



Technical Data

Ratings IEC	10 A / 250VAC; 50Hz
Ratings UL/CSA	15 A / 250VAC; 60Hz
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to 70 °C
IP-Protection	from front side IP 30 acc. to IEC 60529
Insulation cover	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Solder terminals or quick connect terminals
Panel Thickness s	Screw: max 8 mm Mounting screw torque max 0.5Nm
Material: Housing	Thermoplastic, black, UL 94V-0


appliance inlet/-outlet	F acc. to IEC 60320-1, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10 A, Protection Class I
-------------------------	---

Dimensions

4721

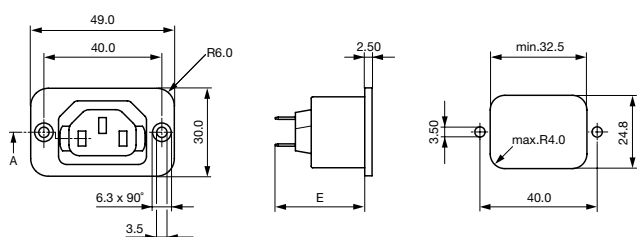

Shutter operation:
shutters opened by plug insertion



Shutter operation:
shutters closed when plug is removed

E: Solder terminals: 28.4 mm

E: Quick connect terminals 4.8 x 0.8 mm: 31.1 mm

E: Quick connect terminalse 6.3 x 0.8 mm: 33.2 mm

All Variants

Type	Panel mounting	Panel Thickness s [mm]	Terminal	Order Number
4721	Screw	-	Quick connect terminals 4.8 x 0.8 mm	4721.0100
4721	Screw	-	Quick connect terminals 6.3 x 0.8 mm	4721.0000
4721	Screw	-	Solder terminals	4721.0300

Most Popular.

Availability for all products can be searched real-time:<http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

Class II product also available on request

Cord retaining clamps and insulation covers see accessories

Packaging unit	100 Pcs
----------------	---------

Accessories

Description	
	Assorted Covers Rear Cover
	0859.0047
	Cord retaining kits Cord retaining strain relief
	Countersunk, D
	Countersunk, F
	4700.0004
	4700.0006

Mating Inlets/Plugs

Category / Description	
	Plug Overview complete
	IEC Plug E, Cord Connector (Rewireable), Straight, max. cable Diameter 8.5 mm
	IEC Plug E, Cord Connector (Rewireable), Straight, max. Cable Diameter 10 mm
	IEC Plug E, Cord Connector (Rewireable), Straight
	IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 8.5 mm
	IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm
	4732
	4735
	9009
	4733
	4736
	Plug further types to 4721
	...