

Datasheet

RS Pro Cylindrical 200V, 0.5 A Reed Switch

RS Stock No: **361-4933**



Product Details


RS Pro cylindrical reed switch has a current rating of 0.5 A and voltage rating of 200 V. It measures 28 x 11 mm. This fully threaded switch is used in position and limit sensing, linear actuators, door and window security.

Features and Benefits

- Reed switch and magnet fitted into separate, identical housings
- Fully threaded for adjustment
- Cable length 280 mm

Specifications:

Contact Position	NO
Contact Resistance	200 mΩ
Dimensions	28 x 11 mm
Length	28 mm
Maximum AC Voltage	200 V ac
Maximum Current	0.5 A
Maximum DC Voltage	200 V dc
Maximum Operating Temperature	+85°C
Minimum Operating Temperature	-20°C
Normal State Configuration	NO
Switch Shape	Cylindrical
Terminal Type	Screw
Total Length	28 mm
Width	11 mm
Application	Position Sensing, Linear Actuators, Door & Window Security
Material	Brass (Case), PVC (Cable)

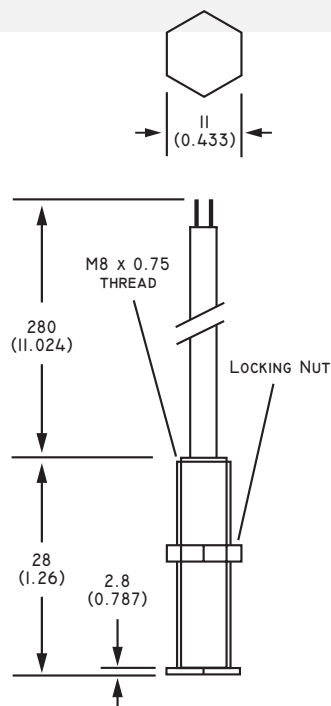

Drawings not to scale
All dimensions in mm(inches) nominal