


IEC Appliance Inlet C14 or C18 with Filter, ECO design, Front- or Rear Side Mounting

Standard- or Medical-Filter

new

Screw-on mounting  
PCB snap-in versionSnap-in mounting  
Quick connect terminals 6.3 x 0.8 mm  
Protection class IIScrew-on mounting  
with wires (stranded)

70° C



70° C

**Description**

- Panel Mount:  
Screw-on version from front or rear side, snap-in version from front side, PCB Version from rear side
- 2 Functions:  
Appliance Inlet protection class I or II, Line filter in standard and medical version
- Solder, quick connect or wire (stranded)
- PCB Mounting
- Earth Terminal

**Approvals**

- VDE Certificate Number: 40016382
- UL File Number: E72928

**Characteristics**

- Compact high performance filter
- Optimal shielding due to completely closed filter case, unpotted
- Designed for standard and medical applications
- Suitable for assembly in metal plated plastic housings
- Qualified for use in equipment according IEC/EN 60950

**Other versions on request**

- Snap-in for panel thickness >2mm to 3mm
- flexible wire with various lengths
- Class X1- and Y1-capacitors for enhanced withstand voltage
- Medical version M80
- Variant with notch for V-Lock mating Cordsets

**Weblinks**

[pdf](#), [html](#), [General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Accessories](#), [Wire Harness](#)

Newly available variants corresponding to V-Lock mating cordset. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset.


**Technical Data**

|                           |                                                                                                                |
|---------------------------|----------------------------------------------------------------------------------------------------------------|
| Ratings IEC               | 1 - 10A @ Ta 40 °C / 250VAC; 50Hz                                                                              |
| Ratings UL/CSA            | 1 - 15A @ Ta 40 °C / 250VAC; 60Hz                                                                              |
| Leakage Current           | standard < 0.5mA (250 V / 60 Hz)<br>medical < 5 µA (250 V / 60 Hz)                                             |
| Dielectric Strength       | > 1.7 kVDC between L-N<br>> 2.7 kVDC between L/N-PE<br>Test voltage (2 sec)                                    |
| Allowable Operation Temp. | -25 °C to 85 °C                                                                                                |
| Climatic Category         | 25/085/21 acc. to IEC 60068-1                                                                                  |
| Degree of Protection      | from front side IP 40 acc. to IEC 60529                                                                        |
| Protection Class          | Suitable for appliances with protection class 1 or 2 acc. to IEC 61140                                         |
| Terminal                  | Quick connect terminals 6.3 x 0.8 mm<br>Solder terminals<br>Flexible wire AWG18 (15A AWG16), 150 mm            |
| Panel Thickness s         | Screw: max 8 mm<br>Mounting screw torque max 0.5 Nm<br>Snap-in: 0.8 mm to 2 mm<br>(all steps with one variant) |
| Material: Housing         | Thermoplast / steel tin-plated, black / metallic, UL 94V-0                                                     |


|                         |                                                                                                                                 |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Appliance-Inlet/-Outlet | C14 acc. to IEC/EN 60320-1, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10 A, Protection Class 1 or 2 |
| Line Filter             | Standard and Medical Version, IEC 60939, IEC 60601-1, UL 1283, UL 544, CSA C22.2 no. 8<br><a href="#">Technical details</a>     |
| MTBF                    | > 3'000'000 h acc. to MIL-HB-217 F                                                                                              |

**Dimensions**

54.5 mm  
Front or rear side mounting for screws with nuts or blind rivets (panel cutout for frontside mounting)

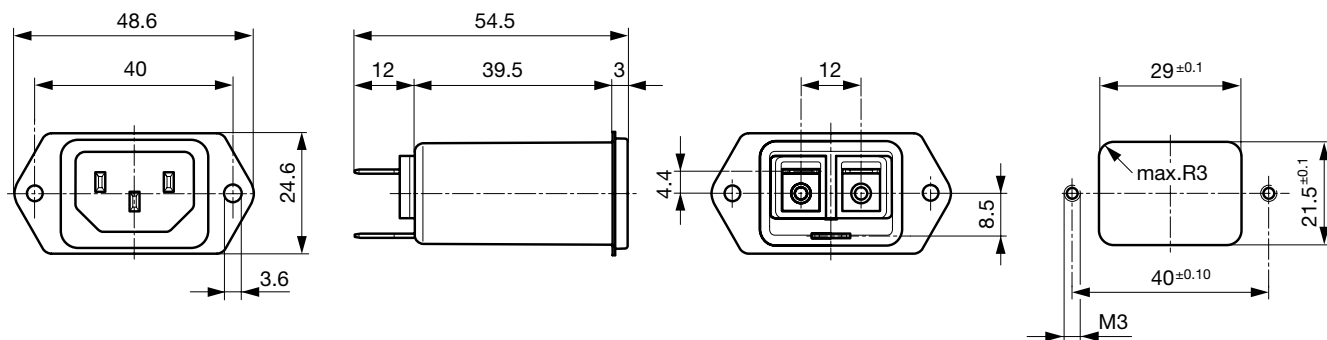


Rear side mounting with pre-formed, threaded holes for M3 screws (panel cutout for rear side mounting)

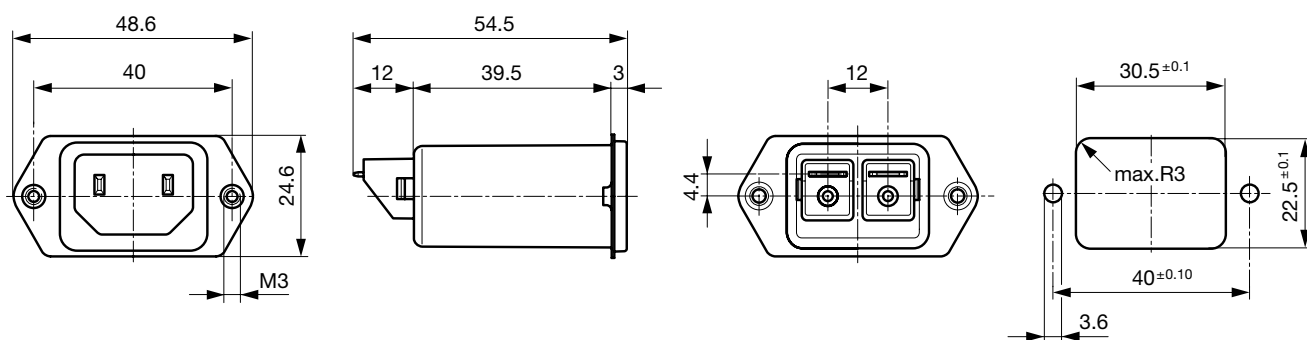


Dimensions for class II version also apply to class I

Snap-in mounting from front side

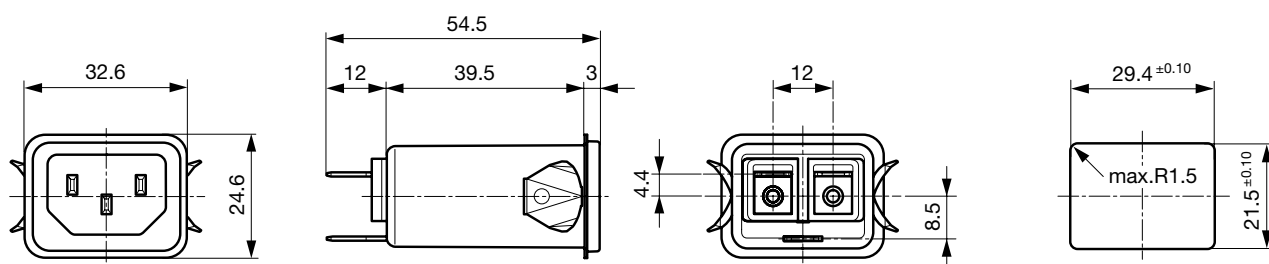


Dimensions for class I version also apply class II


PCB snap-in rear side mounting, protection class I

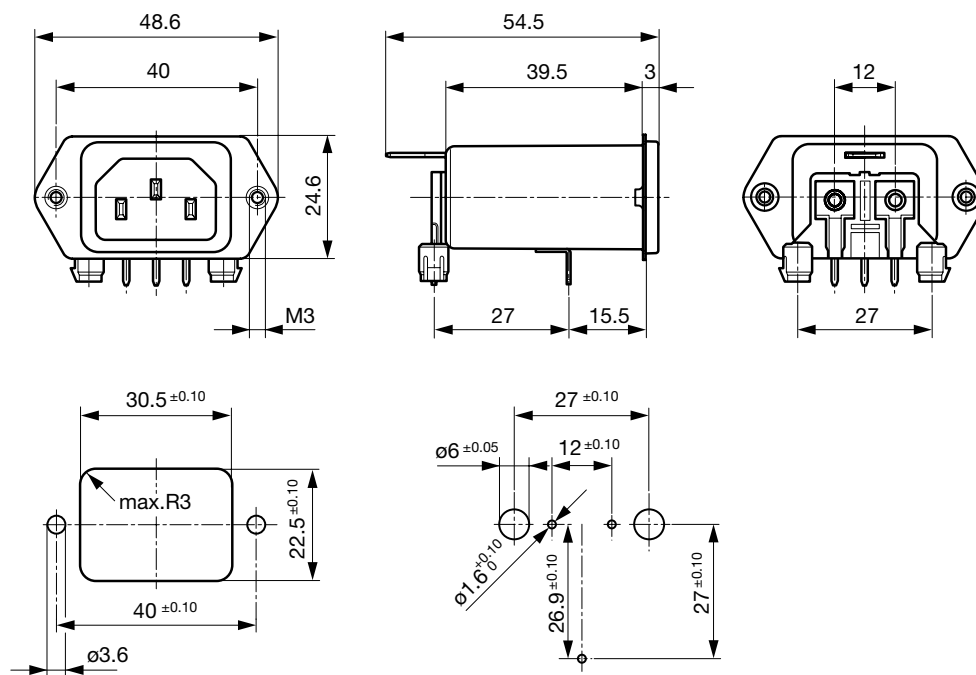


PCB rear side mounting, protection class I

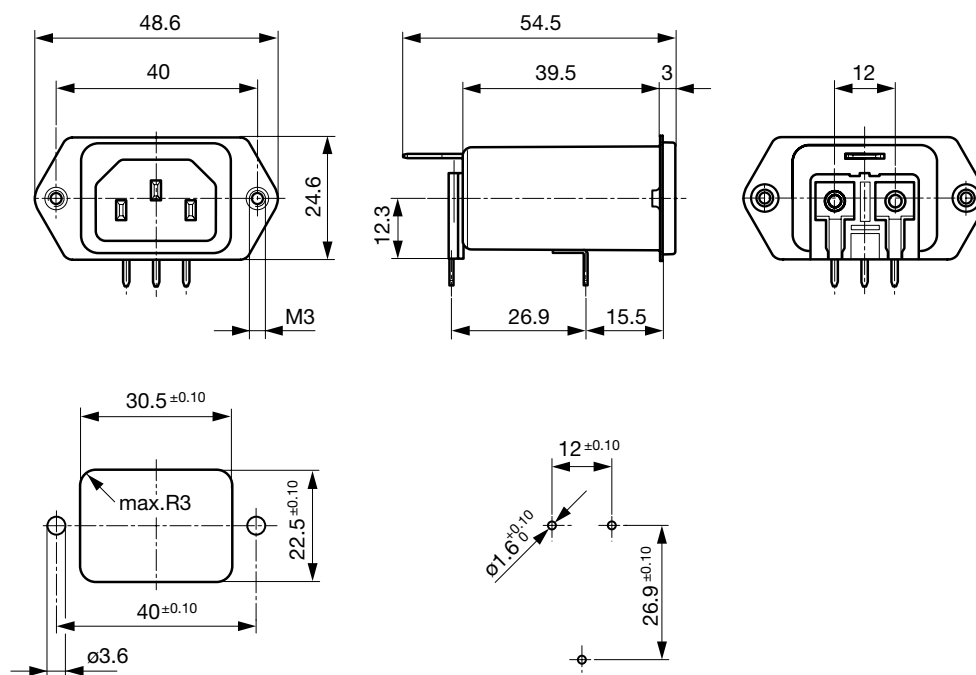


## PCB snap-in rear side mounting, protection class II

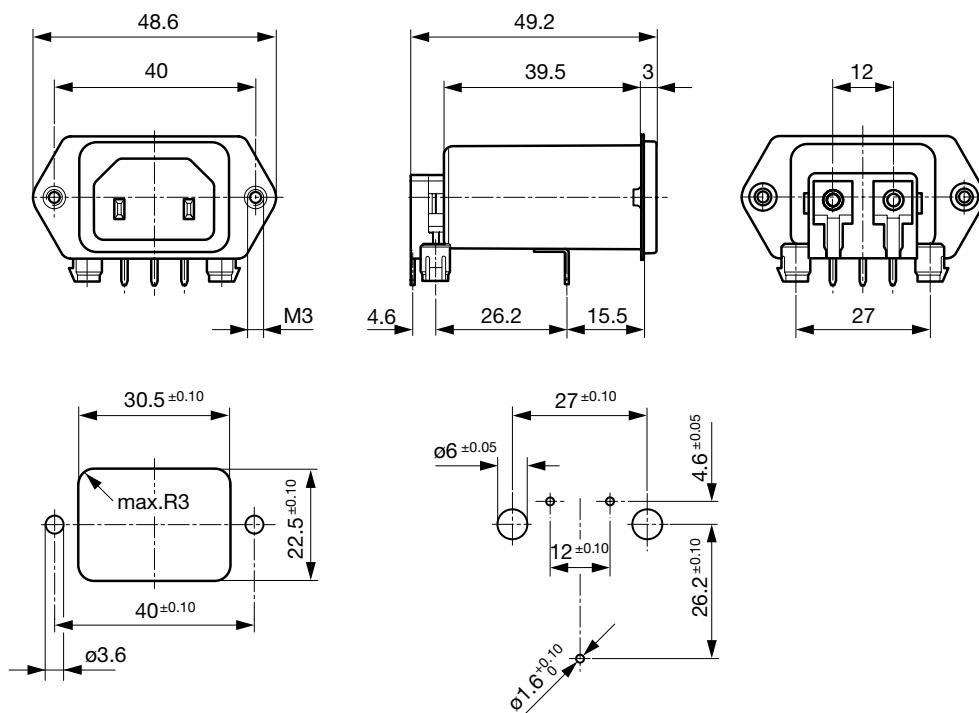

## PCB rear side mounting, protection class II

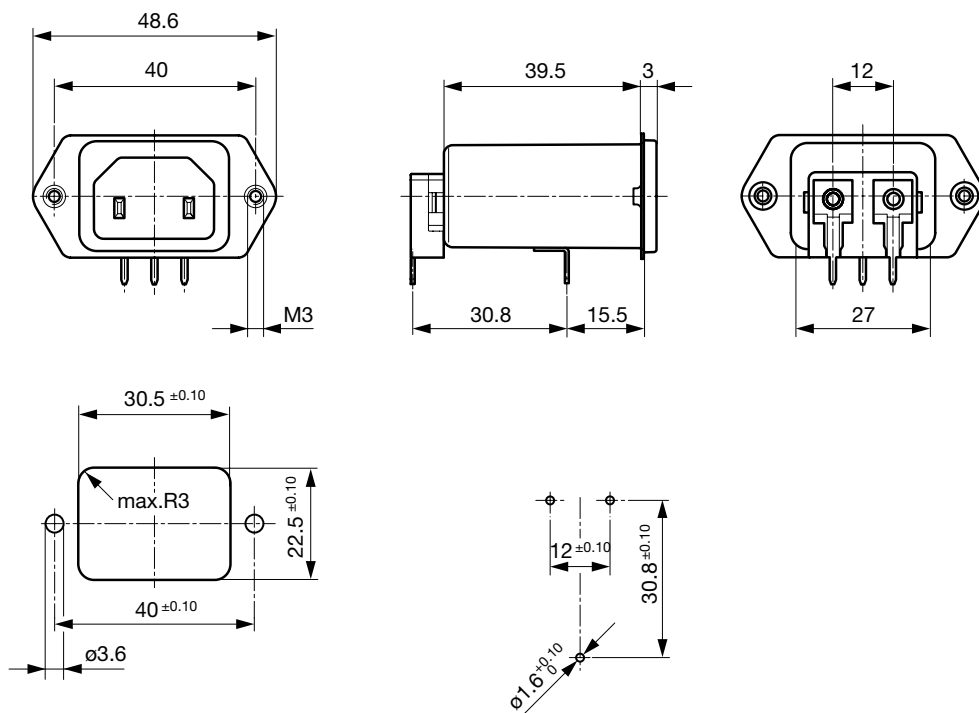

Screw and snap-in mounting with flexible wire

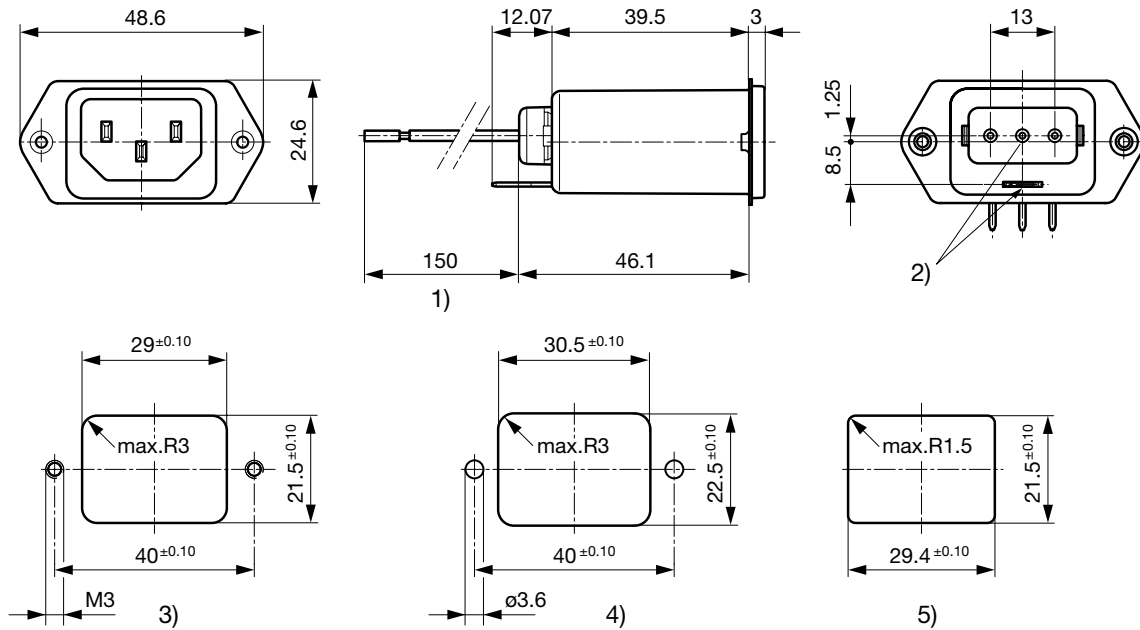

1) Flexible wire, standard length 150 mm or special length on request

2) Nonexistent for protection class II

3) Panel cut-out screw-on version, back-side mounting

4) Panel cut-out screw-on version, front- or back-side mounting


5) Panel cut-out snap-in version, front-side mounting

#### Technical Data of Filter-Components

| Rated Current<br>[A] | Filter-Type            | Inductances<br>L [mH] | Capacitance<br>CX [nF] | Capacitance<br>CY [nF] | R [MΩ] |
|----------------------|------------------------|-----------------------|------------------------|------------------------|--------|
| 1                    | Standard Version       | 2 x 12                | 100                    | 2.2                    | -      |
| 2                    | Standard Version       | 2 x 5.2               | 100                    | 2.2                    | -      |
| 4                    | Standard Version       | 2 x 2                 | 100                    | 2.2                    | -      |
| 6                    | Standard Version       | 2 x 0.8               | 100                    | 2.2                    | -      |
| 10                   | Standard Version       | 2 x 0.4               | 100                    | 2.2                    | -      |
| 15                   | Standard Version       | 2 x 0.1               | 100                    | 2.2                    | -      |
| 1                    | Medical Version (M5)   | 2 x 12                | 100                    | -                      | 1      |
| 2                    | Medical Version (M5)   | 2 x 5.2               | 100                    | -                      | 1      |
| 4                    | Medical Version (M5)   | 2 x 2                 | 100                    | -                      | 1      |
| 6                    | Medical Version (M5)   | 2 x 0.8               | 100                    | -                      | 1      |
| 10                   | Medical Version (M5)   | 2 x 0.4               | 100                    | -                      | 1      |
| 15                   | Medical Version (M5)   | 2 x 0.1               | 100                    | -                      | 1      |
| 1                    | Bleed Resistor Version | 2 x 12                | 100                    | 2.2                    | 1      |
| 2                    | Bleed Resistor Version | 2 x 5.2               | 100                    | 2.2                    | 1      |
| 4                    | Bleed Resistor Version | 2 x 2                 | 100                    | 2.2                    | 1      |
| 6                    | Bleed Resistor Version | 2 x 0.8               | 100                    | 2.2                    | 1      |
| 10                   | Bleed Resistor Version | 2 x 0.4               | 100                    | 2.2                    | 1      |
| 15                   | Bleed Resistor Version | 2 x 0.1               | 100                    | 2.2                    | 1      |


## Diagrams

Standard version




1) Line  
2) Load

Bleed resistor version




1) Line  
2) Load

Medical version M5



1) Line  
2) Load

Medical version M5, prot. class II




1) Line  
2) Load


## Attenuation Loss

Standard version


1 A




2 A




4 A




6 A



10 A




15 A




Medical version (M5)


1 A




2 A




4 A




6 A



10 A



15 A



- - - differential mode    — common mode

## Variants

| Rated Current [A] | Filter-Type          | Mounting          | Mounting side    | Terminal                              | Protection Class | Order Number   |
|-------------------|----------------------|-------------------|------------------|---------------------------------------|------------------|----------------|
| 1                 | Standard Version     | Screw/PCB snap-in | Rear-Side        | PCB pin and earth pin 6.3 x 0.8       | 1                | 5120.5070.0    |
| 2                 | Standard Version     | Screw/PCB snap-in | Rear-Side        | PCB pin and earth pin 6.3 x 0.8       | 1                | 5120.5071.0    |
| 4                 | Standard Version     | Screw/PCB snap-in | Rear-Side        | PCB pin and earth pin 6.3 x 0.8       | 1                | 5120.5073.0    |
| 6                 | Standard Version     | Screw/PCB snap-in | Rear-Side        | PCB pin and earth pin 6.3 x 0.8       | 1                | 5120.5074.0    |
| 10                | Standard Version     | Screw/PCB snap-in | Rear-Side        | PCB pin and earth pin 6.3 x 0.8       | 1                | 5120.5076.0    |
| 15                | Standard Version     | Screw/PCB snap-in | Rear-Side        | PCB pin and earth pin 6.3 x 0.8       | 1                | 5120.5077.0    |
| 1                 | Standard Version     | Screw/PCB         | Rear-Side        | PCB pin and earth pin 6.3 x 0.8       | 1                | 5120.4070.0    |
| 2                 | Standard Version     | Screw/PCB         | Rear-Side        | PCB pin and earth pin 6.3 x 0.8       | 1                | 5120.4071.0    |
| 4                 | Standard Version     | Screw/PCB         | Rear-Side        | PCB pin and earth pin 6.3 x 0.8       | 1                | 5120.4073.0    |
| 6                 | Standard Version     | Screw/PCB         | Rear-Side        | PCB pin and earth pin 6.3 x 0.8       | 1                | 5120.4074.0    |
| 10                | Standard Version     | Screw/PCB         | Rear-Side        | PCB pin and earth pin 6.3 x 0.8       | 1                | 5120.4076.0    |
| 15                | Standard Version     | Screw/PCB         | Rear-Side        | PCB pin and earth pin 6.3 x 0.8       | 1                | 5120.4077.0    |
| 1                 | Standard Version     | Screw-on/Rivet    | Front-/Rear-Side | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.0000.0    |
| 1                 | Standard Version     | Screw-on/Rivet    | Front-/Rear-Side | Solder terminals                      | 1                | 5120.0010.0    |
| 2                 | Standard Version     | Screw-on/Rivet    | Front-/Rear-Side | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.0001.0    |
| 4                 | Standard Version     | Screw-on/Rivet    | Front-/Rear-Side | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.0003.0    |
| 6                 | Standard Version     | Screw-on/Rivet    | Front-/Rear-Side | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.0004.0    |
| 10                | Standard Version     | Screw-on/Rivet    | Front-/Rear-Side | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.0006.0    |
| 15                | Standard Version     | Screw-on/Rivet    | Front-/Rear-Side | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.0007.0    |
| 15                | Standard Version     | Screw-on/Rivet    | Front-/Rear-Side | Flexible wire AWG16, Ground: solder   | 1                | 5120.0057.0    |
| 1                 | Standard Version     | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.1000.0    |
| 2                 | Standard Version     | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.1001.0    |
| 4                 | Standard Version     | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.1003.0    |
| 6                 | Standard Version     | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.1004.0    |
| 10                | Standard Version     | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.1006.0    |
| 10                | Standard Version     | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.1006.0.21 |
| 10                | Standard Version     | Screw             | Rear-Side        | Flexible wire and Earth pin 6.3 x 0.8 | 1                | 5120.1046.0    |
| 15                | Standard Version     | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.1007.0    |
| 6                 | Standard Version     | Snap-in 2 - 3 mm  | Front-Side       | Flexible wire AWG18                   | 1                | 5120.3034.0    |
| 1                 | Standard Version     | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.2000.0    |
| 2                 | Standard Version     | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.2001.0    |
| 4                 | Standard Version     | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.2003.0    |
| 6                 | Standard Version     | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.2004.0    |
| 10                | Standard Version     | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.2006.0    |
| 10                | Standard Version     | Snap-in           | Front-Side       | Flexible wire and Earth pin 6.3 x 0.8 | 1                | 5120.2046.0    |
| 15                | Standard Version     | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.2007.0    |
| 4                 | Medical Version (M5) | Screw/PCB snap-in | Rear-Side        | PCB pin and earth pin 6.3 x 0.8       | 1                | 5120.5373.0    |
| 6                 | Medical Version (M5) | Screw/PCB snap-in | Rear-Side        | PCB pin and earth pin 6.3 x 0.8       | 1                | 5120.5374.0    |
| 4                 | Medical Version (M5) | Screw/PCB         | Rear-Side        | PCB pin and earth pin 6.3 x 0.8       | 1                | 5120.4373.0    |
| 6                 | Medical Version (M5) | Screw/PCB         | Rear-Side        | PCB pin and earth pin 6.3 x 0.8       | 1                | 5120.4374.0    |
| 1                 | Medical Version (M5) | Screw-on/Rivet    | Front-/Rear-Side | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.0300.0    |
| 2                 | Medical Version (M5) | Screw-on/Rivet    | Front-/Rear-Side | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.0301.0    |
| 4                 | Medical Version (M5) | Screw-on/Rivet    | Front-/Rear-Side | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.0303.0    |
| 4                 | Medical Version (M5) | Screw-on/Rivet    | Front-/Rear-Side | Flexible wire and Earth pin 6.3 x 0.8 | 1                | 5120.0343.0    |
| 6                 | Medical Version (M5) | Screw-on/Rivet    | Front-/Rear-Side | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.0304.0    |
| 10                | Medical Version (M5) | Screw-on/Rivet    | Front-/Rear-Side | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.0306.0    |
| 15                | Medical Version (M5) | Screw-on/Rivet    | Front-/Rear-Side | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.0307.0    |
| 1                 | Medical Version (M5) | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.1300.0    |
| 2                 | Medical Version (M5) | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.1301.0    |
| 4                 | Medical Version (M5) | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.1303.0    |
| 6                 | Medical Version (M5) | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.1304.0    |
| 10                | Medical Version (M5) | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.1306.0    |
| 10                | Medical Version (M5) | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm  | 1                | 5120.1306.0.21 |
| 10                | Medical Version (M5) | Screw             | Rear-Side        | Flexible wire and Earth pin 6.3 x 0.8 | 1                | 5120.1346.0    |

| Rated Current [A] | Filter-Type            | Mounting          | Mounting side    | Terminal                             | Protection Class | Order Number   |
|-------------------|------------------------|-------------------|------------------|--------------------------------------|------------------|----------------|
| 15                | Medical Version (M5)   | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm | 1                | 5120.1307.0    |
| 1                 | Medical Version (M5)   | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm | 1                | 5120.2300.0    |
| 2                 | Medical Version (M5)   | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm | 1                | 5120.2301.0    |
| 4                 | Medical Version (M5)   | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm | 1                | 5120.2303.0    |
| 6                 | Medical Version (M5)   | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm | 1                | 5120.2304.0    |
| 10                | Medical Version (M5)   | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm | 1                | 5120.2306.0    |
| 15                | Medical Version (M5)   | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm | 1                | 5120.2307.0    |
| 4                 | Medical Version (M5)   | Screw/PCB snap-in | Rear-Side        | PCB pin and earth pin 6.3 x 0.8      | 2                | 5120.5373.1    |
| 6                 | Medical Version (M5)   | Screw/PCB snap-in | Rear-Side        | PCB pin and earth pin 6.3 x 0.8      | 2                | 5120.5374.1    |
| 10                | Medical Version (M5)   | Screw/PCB snap-in | Rear-Side        | PCB pin and earth pin 6.3 x 0.8      | 2                | 5120.5376.1    |
| 4                 | Medical Version (M5)   | Screw/PCB         | Rear-Side        | PCB pin and earth pin 6.3 x 0.8      | 2                | 5120.4373.1    |
| 6                 | Medical Version (M5)   | Screw/PCB         | Rear-Side        | PCB pin and earth pin 6.3 x 0.8      | 2                | 5120.4374.1    |
| 2                 | Medical Version (M5)   | Screw-on/Rivet    | Front-/Rear-Side | Quick connect terminals 6.3 x 0.8 mm | 2                | 5120.0301.1    |
| 4                 | Medical Version (M5)   | Screw-on/Rivet    | Front-/Rear-Side | Quick connect terminals 6.3 x 0.8 mm | 2                | 5120.0303.1    |
| 6                 | Medical Version (M5)   | Screw-on/Rivet    | Front-/Rear-Side | Quick connect terminals 6.3 x 0.8 mm | 2                | 5120.0304.1    |
| 10                | Medical Version (M5)   | Screw-on/Rivet    | Front-/Rear-Side | Solder terminals                     | 2                | 5120.0316.1    |
| 1                 | Medical Version (M5)   | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm | 2                | 5120.1300.1    |
| 2                 | Medical Version (M5)   | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm | 2                | 5120.1301.1    |
| 2                 | Medical Version (M5)   | Screw             | Rear-Side        | Solder terminals                     | 2                | 5120.1311.1    |
| 4                 | Medical Version (M5)   | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm | 2                | 5120.1303.1    |
| 6                 | Medical Version (M5)   | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm | 2                | 5120.1304.1    |
| 10                | Medical Version (M5)   | Screw             | Rear-Side        | Quick connect terminals 6.3 x 0.8 mm | 2                | 5120.1306.1    |
| 1                 | Medical Version (M5)   | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm | 2                | 5120.2300.1    |
| 2                 | Medical Version (M5)   | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm | 2                | 5120.2301.1    |
| 4                 | Medical Version (M5)   | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm | 2                | 5120.2303.1    |
| 6                 | Medical Version (M5)   | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm | 2                | 5120.2304.1    |
| 10                | Medical Version (M5)   | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm | 2                | 5120.2306.1    |
| 15                | Medical Version (M5)   | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm | 2                | 5120.2307.1    |
| 10                | Bleed Resistor Version | Screw-on/Rivet    | Front-/Rear-Side | Solder terminals                     | 1                | 5120.0216.0    |
| 2                 | Bleed Resistor Version | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm | 1                | 5120.2201.0    |
| 4                 | Bleed Resistor Version | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm | 1                | 5120.2203.0    |
| 6                 | Bleed Resistor Version | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm | 1                | 5120.2204.0    |
| 10                | Bleed Resistor Version | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm | 1                | 5120.2206.0    |
| 15                | Bleed Resistor Version | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm | 1                | 5120.2207.0    |
| 15                | Bleed Resistor Version | Snap-in           | Front-Side       | Quick connect terminals 6.3 x 0.8 mm | 1                | 5120.2207.0.21 |

- 15 A version only according UL/CSA

- Type for screw-on mounting from rear side has pre-threaded holes for M3 screws

Suffix ".21" corresponds to the version with V-Lock mating cordset. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset.

**Packaging unit** 10 Pcs

## Accessories

## Description



Assorted Covers  
Rear Cover



Wire Harness  
Wire harness for SCHURTER products



Cord retaining kits  
Cord retaining strain relief

## Mating Outlets/Connectors

## Category / Description

## Appliance OutletOverview complete



|                                                                                                   |      |
|---------------------------------------------------------------------------------------------------|------|
| IEC Appliance Outlet F, Screw-on Mounting, Front Side, Solder Terminal                            | 4787 |
| IEC Appliance Outlet F, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal            | 4788 |
| IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder, PCB or Quick-connect Terminal | 5091 |
| IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder or Quick-connect Terminal      | 5092 |

Appliance Outletfurther types to5120

## ConnectorOverview complete



|                                          |        |
|------------------------------------------|--------|
| IEC Connector C15, Rewireable, Straight  | 0101   |
| IEC Connector C15A, Rewireable, Straight | 0102   |
| IEC Connector C15A, Rewireable, Straight | 0102-G |
| IEC Connector C15A, Rewireable, Angled   | 0112   |
| IEC Connector C13, Rewireable, Angled    | 4012   |

Connectorfurther types to5120

...

## Power CordOverview complete



|                                           |      |
|-------------------------------------------|------|
| Power Cord with IEC Connector C13, Angled | 0311 |
| Power Cord with IEC Connector C13, Angled | 3011 |
| Power Cord with IEC Connector C13, Angled | 3012 |
| Power Cord with IEC Connector C13, Angled | 3013 |
| Power Cord with IEC Connector C13         | 3020 |

Power Cordfurther types to5120

...