
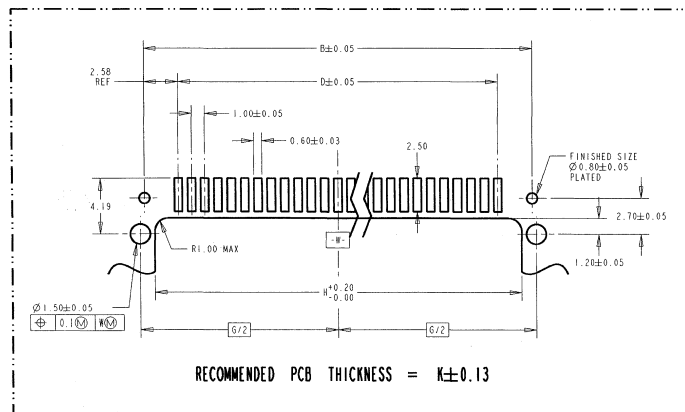
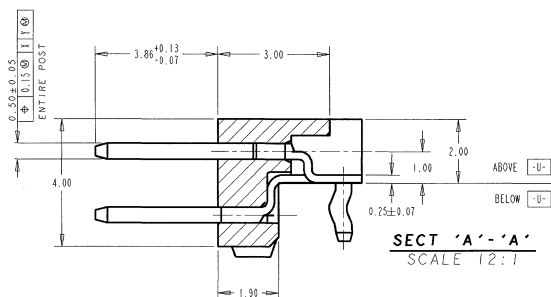



LOC	DIST	REVISIONS					
DY	-	F	LTR	DESCRIPTION	DATE	DWN	APR
			A	REVISED ECR-07-014309	15JUN2007	GKT	1 SF

NOTES:

- 1 MATERIAL: PPS, UL94-0, BLACK
 POST: COPPER ALLOY
 2 FINISH:
 CONTACT AREA: 0.76um GOLD OR GOLD FLASH OVER 0.76um Pd-Ni
 SOLDER AREA: 2.54um MIN WETTED TIN ALLOY
 UNDERPLATE: 1.3um MIN NICKEL ALL OVER
 3 POSITION NO. FOR REFERENCE ONLY
 4 ALL PCB CONTACT SURFACES OF SMT SOLDER TAILS
 TO BE A MAX OF 0.1 ABOVE () AND A
 MAX OF 0.05 BELOW () SUBJECT TO TOTAL () 0.1
 5. ALL DIMENSIONS, EXCEPT STRAIGHTNESS TO BE
 MEASURED WITH BOW REMOVED

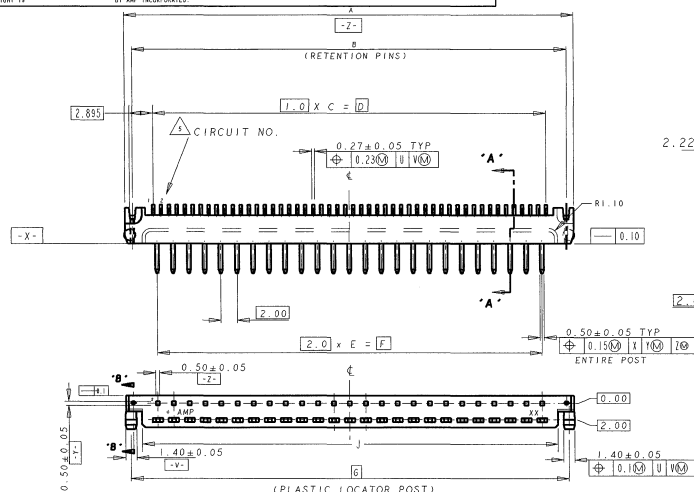

ACTIVE	REFER TO PG 2 OF 2	TAPAREEL	0.8	52.10	52.58	54.79	48	24	49	49	54.15	56.03	-	25.45, 46	50	1-S084108	
ACTIVE	REFER TO PG 2 OF 2	TAPAREEL	0.8	52.10	52.58	54.79	48	24	49	49	54.15	56.03	-	NIL	50	1-S084108	
ACTIVE	-	TRAY	0.8	52.10	52.58	54.79	48	24	49	49	54.15	56.03	-	5.6, 26	50	5084108	
ACTIVE	-	TRAY	0.8	52.10	52.58	54.79	48	24	49	49	54.15	56.03	-8.44 (AT)	25.45, 40	50	5084108	
ACTIVE	-	TRAY	0.8	52.10	52.58	54.79	48	24	49	49	54.15	56.03	-8.40 (SCS1)	24.41, 42	50	5084108	
STATUS	REMARKS	PACKAGING	K	J	H	G	F	E	D	C	B	A	CUST. P/N FOR REF ONLY	POSTED	POS	PART NO	
THIS DRAWING IS THE PROPERTY OF TYCO ELECTRONICS. IT IS TO BE USED FOR THE SPECIFIC PROJECT AND NOT TO BE REPRODUCED OR COPIED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS.																	
DIMENSIONS: mm			TOLERANCES UNLESS OTHERWISE SPECIFIED: 1. P/LC -40 -7 2. P/LC -40 -3 3. P/LC -40 -15 4. P/LC -40 -1 5. P/LC -40 -3 6. P/LC -40 -3			UN K.W. TAP 05JUL2005 R.V. CHDO 05JUL2005 APPL SE-LEFONG 05JUL2005			tyco Electronics Tyco Electronics Singapore Pte. Ltd.			NAME HEADER ASSEMBLY, 2mm AMPMODU SMT, R/A, D/R					
			FINISH			APPLICATION SPEC			SIZE A2			CASE CODE 00779			DRAWING NO C-5084108		
MATERIAL 			FINISH 			CUSTOMER DRAWING			SCALE 2:1			SHEET 1 OF 2			REV.		

