
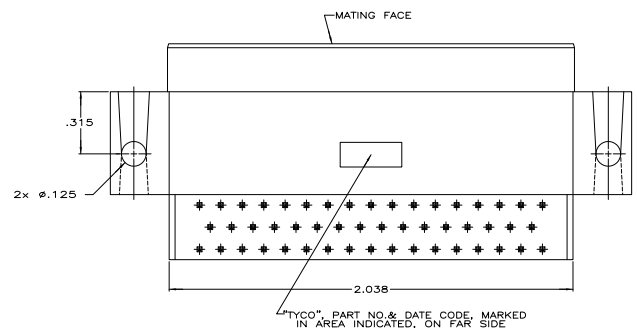
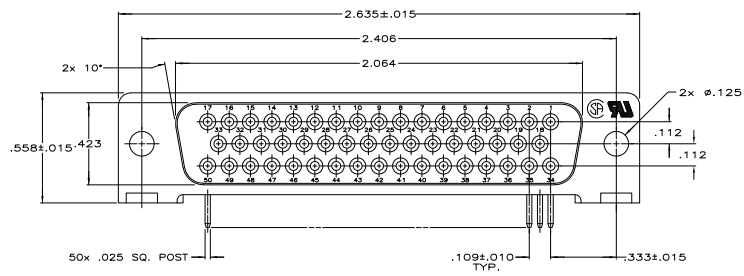


- △ HOUSING: FLAME RETARDANT 94V-0 RATED THERMOPLASTIC, COLOR BLACK. CONTACTS: BRASS
- △ GOLD PLATED FOR LENGTH OF .100 MIN FROM MATING END, GOLD FLASH IN MATED AREA. .000100 MIN TIN ON SOLDER END, BOTH OVER .000050 MIN NICKEL.
- △ GOLD PLATED FOR LENGTH OF .100 MIN FROM MATING END, .000030 MIN GOLD IN MATED AREA. .000100 MIN TIN ON SOLDER END, BOTH OVER .000050 MIN NICKEL. OR GOLD FLASH OVER PALLADIUM NICKEL PLATED FOR LENGTH OF .100 MIN FROM MATING END, .000030 MIN PALLADIUM NICKEL IN MATED AREA, .000100 MIN TIN ON SOLDER END, BOTH OVER .000050 MIN NICKEL.

THIS DRAWING IS A CONTROLLED DOCUMENT		REVISED		REVISED		REVISED		REVISED	
DESIGNER	DATE	DESIGNER	DATE	DESIGNER	DATE	DESIGNER	DATE	DESIGNER	DATE
108-40025	114-40015	108-40025	114-40015	108-40025	114-40015	108-40025	114-40015	108-40025	114-40015
CUSTOMER DRAWING		CUSTOMER DRAWING		CUSTOMER DRAWING		CUSTOMER DRAWING		CUSTOMER DRAWING	