

1		2		
PRODUCT NO	PRODUCT NO	POSITIONS	DIM. A	DIM.B
55510-X04 SEE NOTE 5 ▲	55510-X04LF SEE NOTE 6 & ▲	2 X 2	2.00 / .079	3.92 / .154
55510-X06	55510-X06LF	2 X 3	4.00 / .158	5.92 / .233
55510-X08	55510-X08LF	2 X 4	6.00 / .236	7.92 / .312
55510-X10	55510-X10LF	2 X 5	8.00 / .315	9.92 / .391
55510-X12	55510-X12LF	2 X 6	10.00 / .394	11.92 / .469
55510-X14	55510-X14LF	2 X 7	12.00 / .472	13.92 / .548
55510-X16	55510-X16LF	2 X 8	14.00 / .551	15.92 / .627
55510-X18	55510-X18LF	2 X 9	16.00 / .630	17.92 / .706
55510-X20	55510-X20LF	2 X 10	18.00 / .709	19.92 / .784
55510-X22	55510-X22LF	2 X 11	20.00 / .787	21.92 / .863
55510-X24	55510-X24LF	2 X 12	22.00 / .866	23.92 / .942
55510-X26	55510-X26LF	2 X 13	24.00 / .945	25.92 / 1.020
55510-X28	55510-X28LF	2 X 14	26.00 / 1.024	27.92 / 1.099
55510-X30	55510-X30LF	2 X 15	28.00 / 1.102	29.92 / 1.178
55510-X32	55510-X32LF	2 X 16	30.00 / 1.181	31.92 / 1.257
55510-X34	55510-X34LF	2 X 17	32.00 / 1.260	33.92 / 1.335
55510-X36	55510-X36LF	2 X 18	34.00 / 1.339	35.92 / 1.414
55510-X38	55510-X38LF	2 X 19	36.00 / 1.417	37.92 / 1.493
55510-X40	55510-X40LF	2 X 20	38.00 / 1.496	39.92 / 1.572
55510-X42	55510-X42LF	2 X 21	40.00 / 1.575	41.92 / 1.650
55510-X44	55510-X44LF	2 X 22	42.00 / 1.654	43.92 / 1.729
55510-X46	55510-X46LF	2 X 23	44.00 / 1.732	45.92 / 1.808
55510-X48	55510-X48LF	2 X 24	46.00 / 1.811	47.92 / 1.887
55510-X50 SEE NOTE 5 ▼	55510-X50LF SEE NOTE 6 & ▼	2 X 25	48.00 / 1.890	49.92 / 1.965

3		4
		PLATING OPTIONS OVER CONTACT AREA
		0 = 0.05µm/2µ"Au
		1 = 0.76µm/30µ"Au
		3 = 0.38µm/15µ"Au
		5 = 2.54µm/100µ"100% MATTE TIN

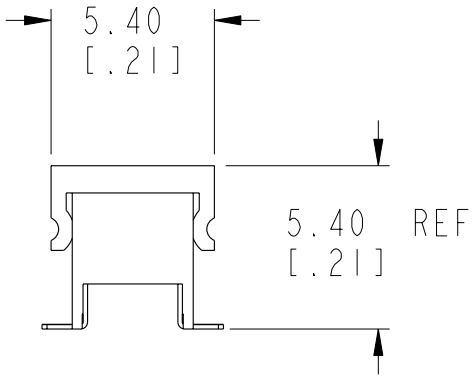
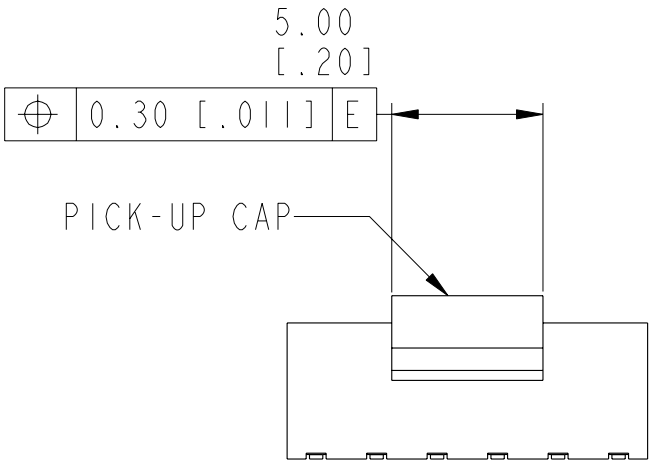


FIG 1  
NOTE 7(b)

CONFIDENTIAL

	title	dwg no	Rev.
	LPVCC	55510	G
	4.5 TOP ENTRY SMT ASSY		
catalog no	-	CUSTOMER	sheet 2 of 3

NOTES:

1. HOUSING MATERIAL : HIGH TEMP PLASTIC.

2. TERMINAL MATERIAL : PHOSPHOR BRONZE.

3. TERMINAL RETENTION 0.5Kg/1.1 Lbs

④ 'V' CUT OPTIONAL - MANUFACTURING PROCESS OPTION.

⑤ USE TIN/LEAD PLATED SOLDER TAILS.

⑥ USE 100% MATTE TIN PLATED SOLDER TAILS

⑦ PRODUCT DESCRIPTION CODE:

XXXXX-X XXLF

LEAD FREE (SEE NOTE 6 & 11)

TOTAL POSITIONS

PLATING AT CONTACT AREA

BASE NUMBER

⑧ PACKAGING:

(a) XXXXX-XXX

---STD PACKAGING IN TUBE.

(b) XXXXX-XXXTR

---TAPE AND REEL PACKAGING WITH  
PICK-UP CAP. (FIG 1)

(c) XXXXX-XXXTRN

---TAPE AND REEL PACKAGING WITHOUT  
PICK-UP CAP.

9. CO-PLANARITY:  
FROM POSITION

- X04 THRU -X38 : 0.10 / .004

- X40 THRU -X50 : 0.12 / .005

△ 10. PRODUCT SPECIFICATION: GS-12-008

11. THE HOUSING WILL WITHSTAND EXPOSURE TO 255°C PEAK  
TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED  
OR VAPOR PHASE REFLOW OVEN.

⑫ THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER  
COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

△ 13. A △ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE  
WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

CONFIDENTIAL



LPVCC

4.5 TOP ENTRY SMT ASSY

catalog no

dwg no

55510

Rev.

G

CUSTOMER

sheet 3 of 3