

PRODUCT NUMBER

71922-YXXLF

WHEN REQUIRED, ADD SUFFIX LETTER "LF"
INDICATES THE PRODUCT IS RoHS
COMPATIBLE, SEE NOTE 10

TOTAL NB OF POSITIONS, SEE SHEET 2

LATCHING





0= WITHOUT LATCH

1= STANDARD LATCH

2= LOW PROFILE LATCH

NOTES:

- 1 - HOUSING MAT'L : GLASS FILLED
THERMOPLASTIC. UL94V-0 COLOR: GREY
- 2 - PIN MATERIAL : PHOSPHOR BRONZE
- 3 - PRODUCT PACKAGED IN TUBES
- 4 - 40N MIN LATCH RETENTION FORCE
AT FIRST EXTRACTION
- 5 - TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS PER ROW
EXAMPLE : 8 POS N x 2.54 = 20.32mm
- 6 - NO CENTRAL SLOT ON POSITIONS 6 & 8
- 7 - NO LEFT POLARIZATION ON POSITIONS 06, 08, 10, 14.
- 8 - NO GROOVE ON POSITIONS 06, 08, 10, 14, 30, 34
- 9 - 4.5mm SOLDER TAIL
ORDER 71922-4XX (WITH STANDARD LATCH ONLY)
- 10 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - a - PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD-FREE,
2µm MINIMUM MATTE TIN OVER 1.27µm
MINIMUM NICKEL UNDERPLATE.
 - b - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO
260°C ±5°C SOLDER BATH TEMPERATURE FOR
5 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.6mm MIN THICK CIRCUIT BOARD.
 - c - LABELING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - d - LEGAL STATEMENT: SEE GS-22-008.

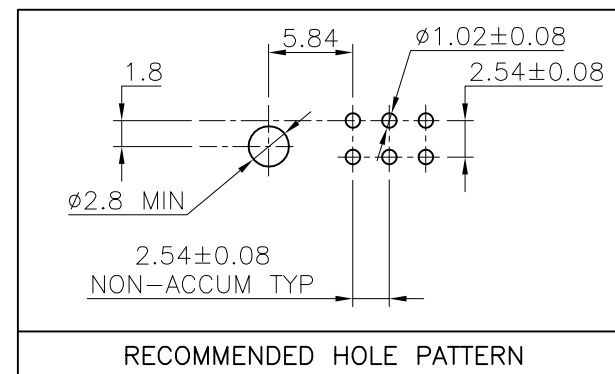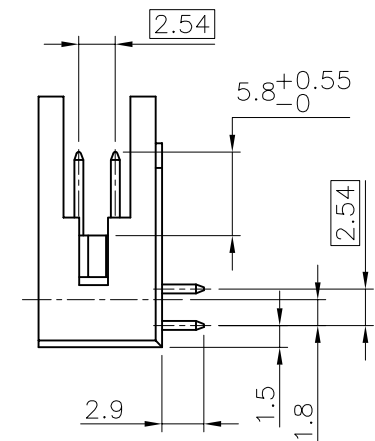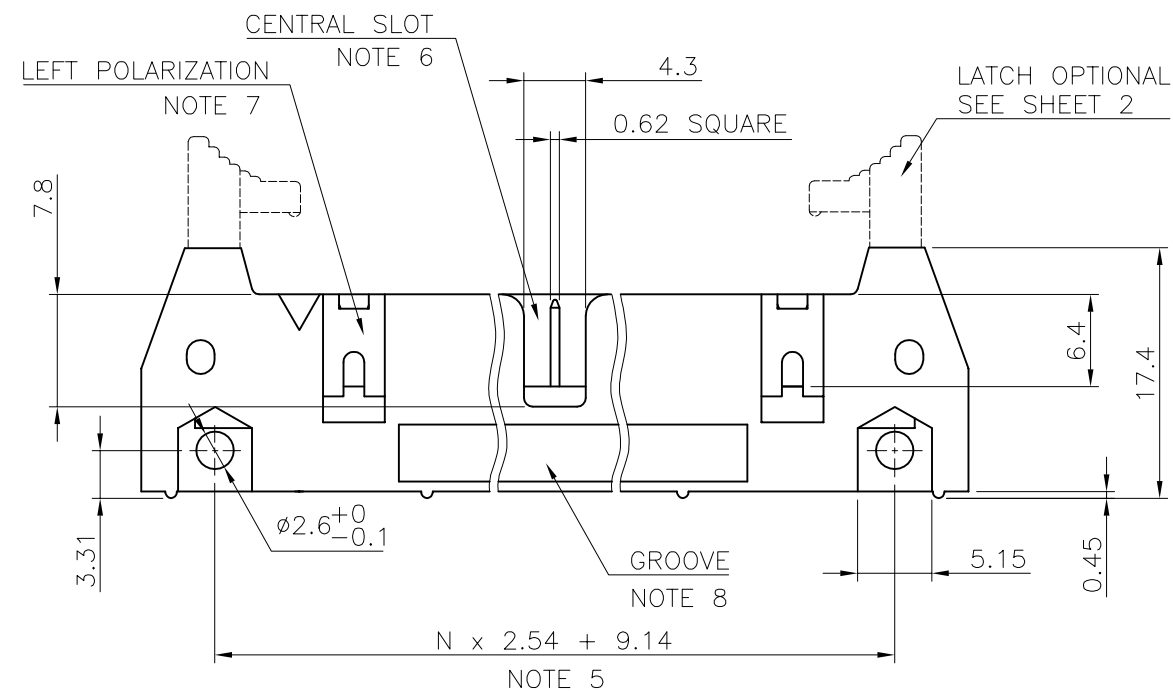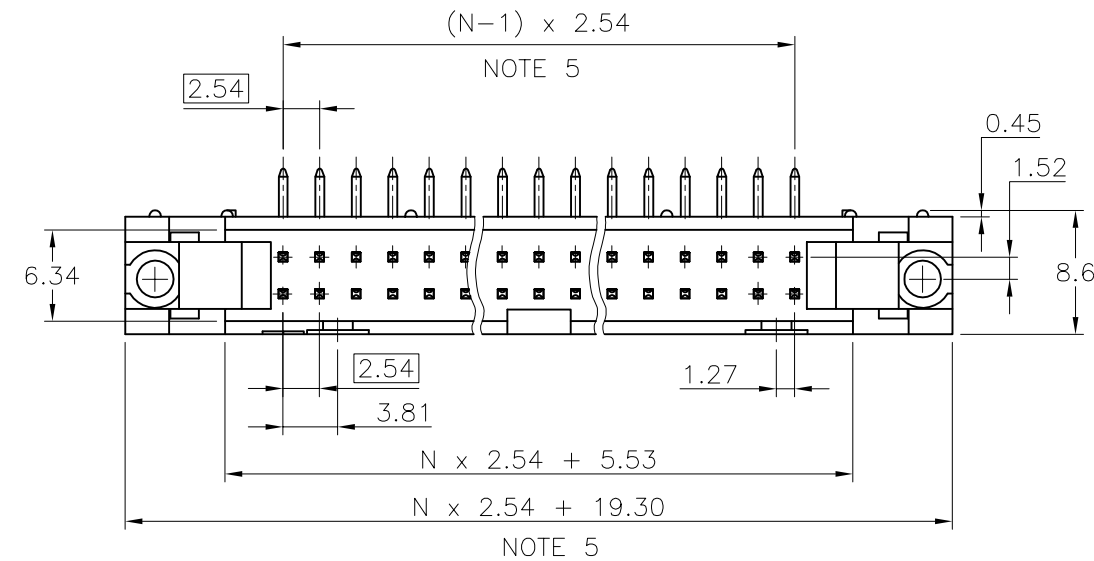

mat'l. code				surface	tolerance	projection	product family			
SEE NOTES				ISO 1302	ISO 406	ISO 1101	QUICKIE			
ltr	ecn no	dr	date	tolerances unless	otherwise specified		title			
M	F04-0121	LMU	04.01.27	angles	XX ±0.3	mm	SHR.EL.HEADER			
N	F04-0176	LMU	04.04.22	linear	.XX ±0.13		RA DR TMT			
P	F04-0325	JCO	04.08.16		.XXX ±0.05	scale 2:1				
R	F04-0389	LMU	04.09.17	dr	D.LE	01.01.24	dwg no			
S	F06-0229	LMU	06.07.17	enr	JM.C	01.01.24	sheet 1 of 2			
T	F07-0195	LMU	07.05.25	chr	JF.N	01.01.24	71922			
U	F08-0146	YOY	08.04.11	appd	JM.C	01.01.24	A3			
sheet	revision	U	P				type			
index	sheet	1	2				CUSTOMER Drawing			



Copyright FCI



1

2 3

4

5

6

CORE RANGE

LATCHING	NUMBER OF POSITIONS
1	06
1	08
1	10
1	14
1	16
1	18
1	20
1	26
1	30
1	34
1	40
1	44
1	50
1	60
1	64

PLATING :

- 0.76µm GOLD/GXT
(PdNi WITH GOLD FLASH) ON CONTACT AREA
3.81µm TIN-LEAD ON TAIL
UNDERPLATE : 1.27µm Ni MIN
- WHEN SUFFIX LETTER "LF" IS REQUIRED,
2µm MIN MATTE TIN OVER 1.27µm MIN
NICKEL IS PROVIDED INSTEAD OF TIN-LEAD

CATALOGUE RANGE


LATCHING	NUMBER OF POSITIONS
0/2	06
0/2	08
0/2	10
0/2	14
0/2	16
0/2	18
0/2	20
0/2	26
0/2	30
0/2	34
0/2	40
0/2	44
0/2	50
0/2	60
0/2	64

PLATING :


- 0.76µm GOLD/GXT
(PdNi WITH GOLD FLASH) ON CONTACT AREA
3.81µm TIN-LEAD ON TAIL
UNDERPLATE : 1.27µm Ni MIN
- WHEN SUFFIX LETTER "LF" IS REQUIRED,
2µm MIN MATTE TIN OVER 1.27µm MIN
NICKEL IS PROVIDED INSTEAD OF TIN-LEAD

APPLICATION SPECIFIC


PRODUCT NUMBER	SIZE	MISSING PIN
71922-139	2x20	PIN 20

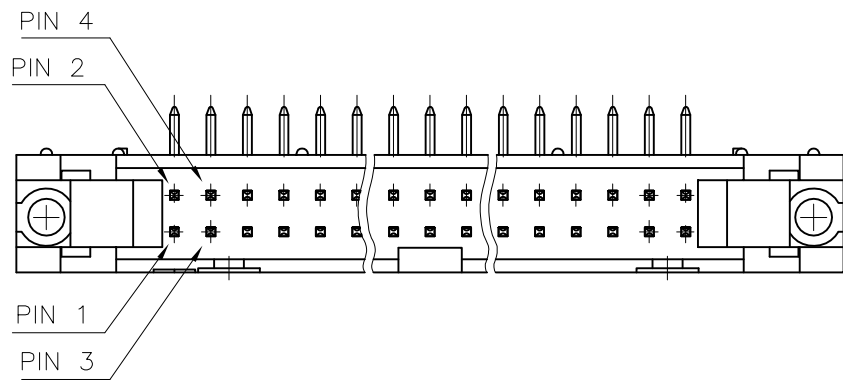

LATCHING FEATURES :

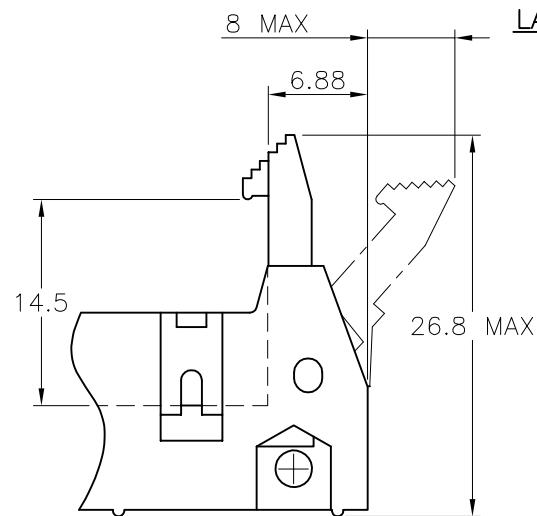

1= STANDARD LATCH

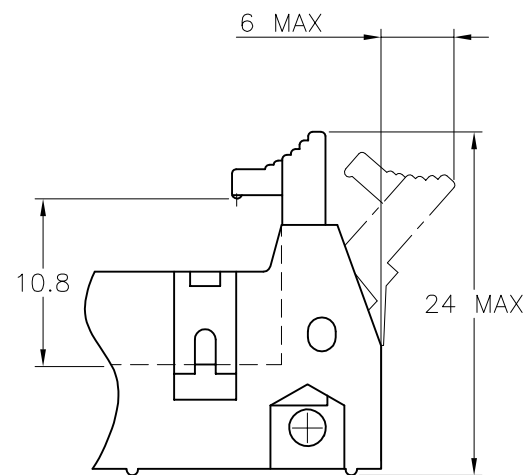

2= LOW PROFILE LATCH

mat'l. code				surface ISO 1302	tolerance ISO 406 ISO 1101	projection mm	product family QUICKIE			
ltr	ecn no	dr	date	tolerances unless otherwise specified		scale 2:1	title SHR.EL.HEADER RA DR TMT			
M	F06-0229	LMU	06.07.17	angles	linear		dwg no 71922 sheet 2 of - size A3			
N	F07-0195	LMU	07.05.25							
P	F08-0146	YOV	08.04.11							
J	F04-176	LMU	04.04.23	dr	D.LE	01.01.24	type CUSTOMER Drawing			
K	F04-0325	JCO	04.08.16	engr	JM.C	01.01.24				
L	F04-0389	JCO	04.12.21	chr	JF.N	01.01.24				
				appd	JM.C	01.01.24				
sheet index	revision sheet									