


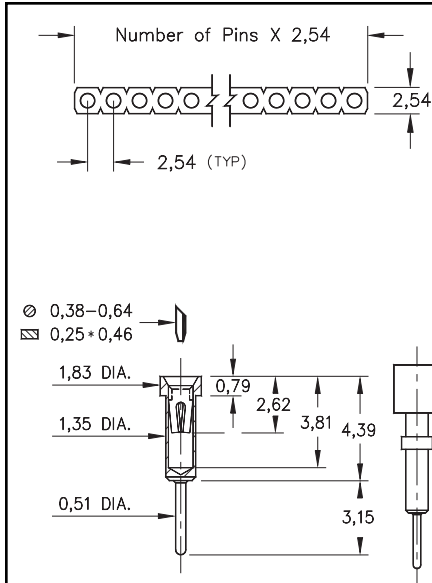


Fig. 1

- Standard solder tail receptacles can be mounted as a low profile receptacle or by the solder tail for use in smaller diameter holes.
- Series 712 uses MM #0255 pins. See page 136 for details.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 218 for details.
- Insulators are high temp. thermoplastic.

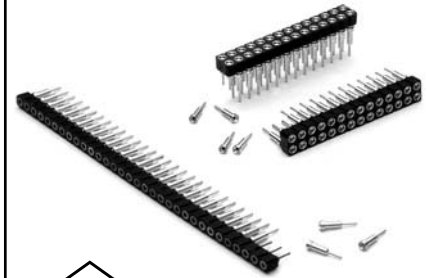

Ordering Information

Fig. 1

Single Row (0,71 OR 1,4 min. mounting holes)

712-XX-1_ _-41-001000

Specify # of pins → 01-64

Fig. 2

Double Row (0,71 OR 1,4 min. mounting holes)

712-XX-2_ _-41-001000

Specify # of pins → 02-64

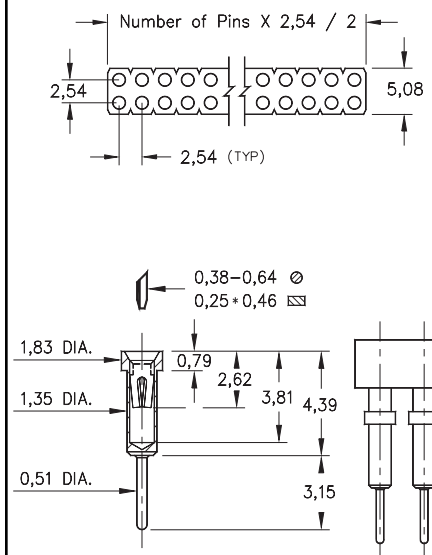


Fig. 2

For Electrical,
Mechanical & Enviromental
Data, See pg. 4

XX=Plating Code
See Below

For RoHS compliance
select ◇ plating code.

SPECIFY PLATING CODE XX=	13◇		93			43◇	
Sleeve (Pin)	0,25µm Au		5,08µm Sn/Pb			5,08µm Sn	
Contact (Clip)	0,76µm Au		0,76µm Au			0,76µm Au	