

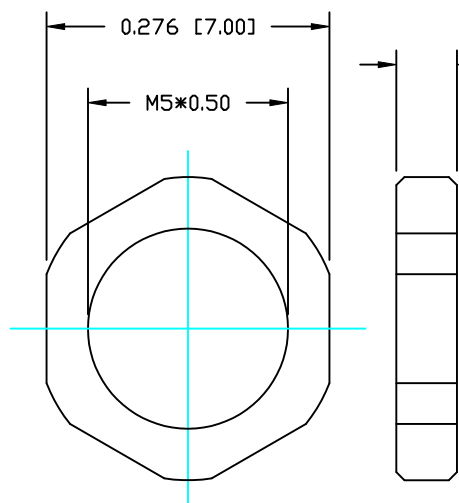
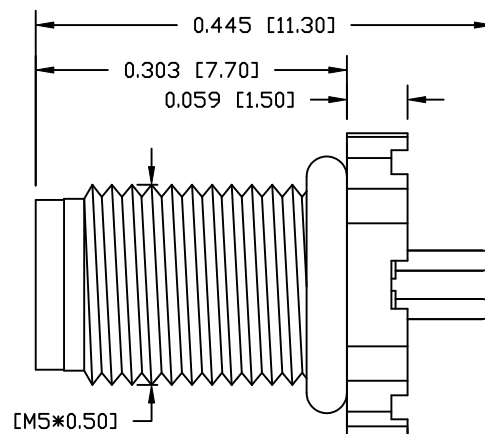



DESCRIPTION: M5 MALE - PANEL MOUNT (REAR) - VERTICAL - 2 POSITION

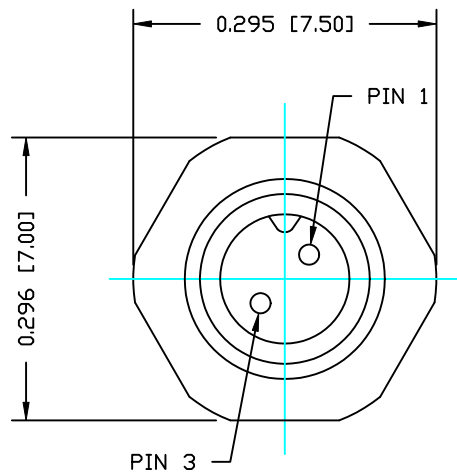

NUT

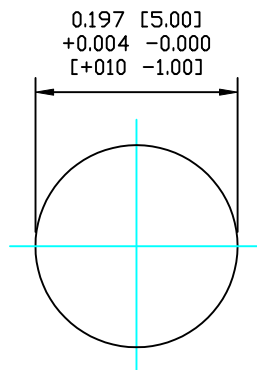

RECOMMENDED
PANEL CUTOUT

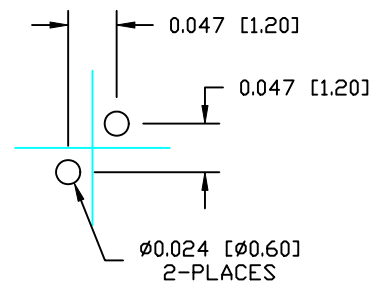

RECOMMENDED
PANEL PCB

NOTE:

MATERIAL

HOUSING: PBT UL94V-0, BLACK
CONTACT: BRASS
NUT: BRASS
SHELL: BRASS
O-RING: NBR, BLACK

FINISH
CONTACT:

GOLD PLATED
OVER 50μ" NICKEL
NICKEL PLATED
NICKEL PLATED

ELECTRICAL


RATED CURRENT: 1A
RATED VOLTAGE: 60V
INSULATION RESISTANCE: 100 mOhms MIN.
CONTACT RESISTANCE: 10 mOhms MAX.
WATER PROOF: IP67

ENVIRONMENT

OPERATION TEMPERATURE: -40°C TO +85°C

852-002-113R00Y

1 = GOLD FLASH
4 = 10μ" GOLD

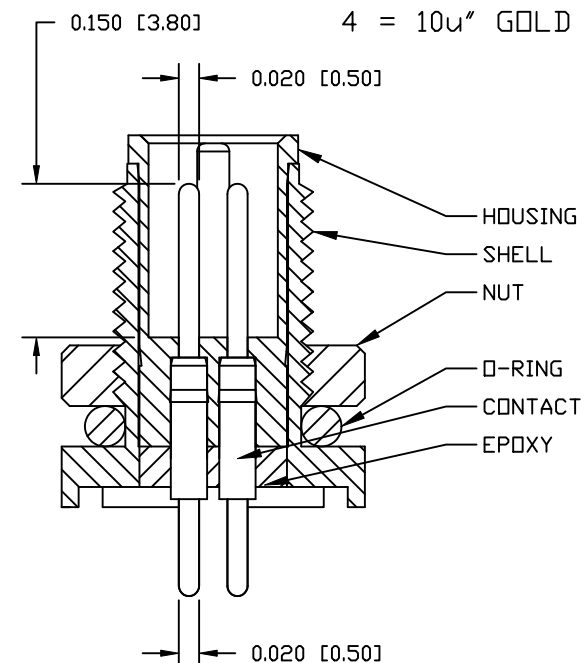

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
M. SIGMON

DATE:
03-03-16

CHECKED:

DATE:

NorComp

SCALE:
NTS

SHEET
1 OF
1

REV
1

DWG NO.

852-002-113R00Y

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NorComp:](#)

[852-002-113R004](#)