

RJ45 MODULAR JACK SERIES A00



FEATURES:

Top performance for high speed networking, voice and data applications

Meets FCC PART 68, Subpart F requirements

Industry standard footprint and height with low profile options available

Available with or without shielding

Ganged and/or stacked for multiple port requirements

Advanced EMI / RFI protection


Both plugs and jacks can be fully or partially loaded

SPECIFICATIONS:

Modular jack housing: PBT Polyester, UL 94V-0 Modular plug housing: Polycarbonate, UL 94V-0

Contact: Phosphor Bronze, gold on contact area, Tin over nickes on tails

Contact Resistance: 20 milli ohms maximum Dielectric Withstanding Voltage: 1000Vac Insulation Resistance: 500 Megohms minimum

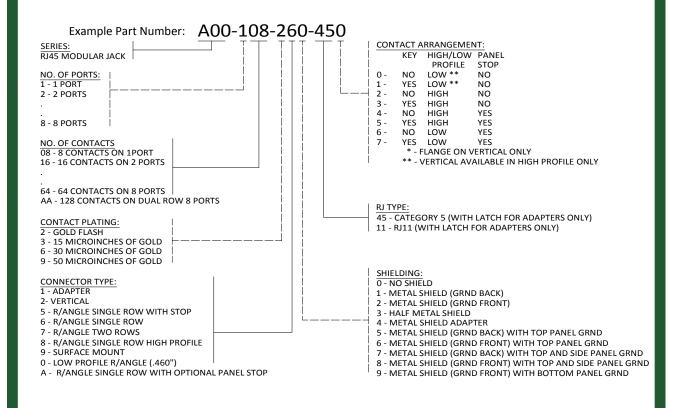

Phone: (416) - 754 - 3322 Fax: (416) - 754 - 3299 Email: CustomerService@edac.net Website: www.edac.net