

APPROVED

SIGNATURE

DATE


REV.	REV. NO.	DATE	SEEN	DESCRIPTION



⑤




④





③




②



①

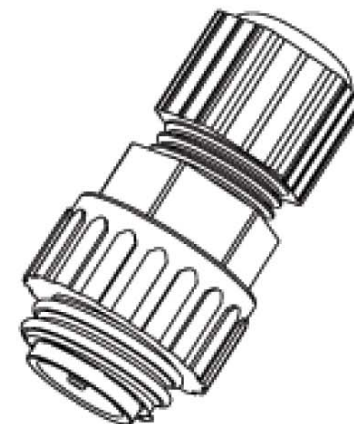

Pin Assignments
Front View 前視圖

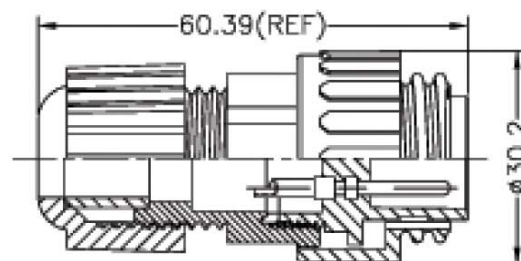

Note:

- * Ⓢ Important Dimension.
(Ⓢ 為重點尺寸)
- * Waterproof Rate: IP67
- * Connector: Black, Nylon+GF
- * Pin: Copper Alloy, Gold Plated
- * Seals for Cable OD: $\phi 5.5\text{mm} \sim \phi 10.8\text{mm}$
(防水墊圈限用線徑: $\phi 5.5\text{mm} \sim \phi 10.8\text{mm}$)
- * One Set Unassembled in One PE Bag
(每一組未組裝, 放置於一個PE袋, 并封口)

UNIT : mm	3+PE Power Connector(12A)
TOLERANCE	SCALE Free
.X ± 0.25	SHEET 1 of 1
.XX ± 0.1	REV. 01
.XXX ± 0.05	SIZE A4
ANGLES $\pm 1^\circ$	Ⓢ : Inspection Item

ASSMANN
Electronic Components

ITEM NO A-P04BMMA-S180-WP	DRAWN BY Lin Li Qing	DATE 2006/06/19
DWG NO A-P04BMMA-S180-WP	CHECKED BY Ling	DATE 2006/06/24
	APPROVED BY Robert Hsu	DATE 2006/06/28

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN LHM PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM LHM CORP.