







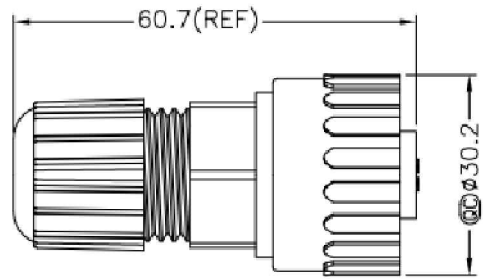
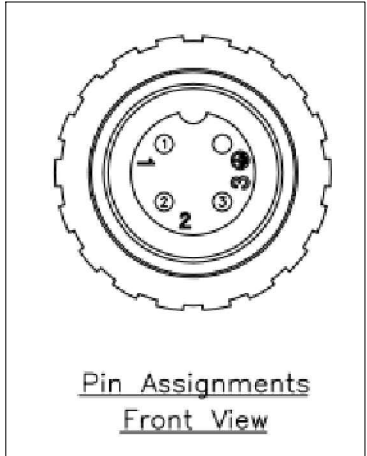



	1	2	3	4	5	6	7	
A								A
B								B
C								C
D								D
E								E
F								F
G								G
H								H



Note:

- * Ⓞ Important Dimensions To Check.
- * Waterproof Rate: IP67
- * Housing: Black, Nylon+GF
- * Pin: Copper Alloy, Gold Plated
- * Screw Nut: Black, Nylon+GF
- * Gasket: Black, Silicone
- * Ring: Black, EPDM
- * Clamp Ring: Black, Nylon
- * Sealing Nut: Black, Nylon
- * Seal For Cable OD: $\phi 5.5\text{mm} \sim 10.8\text{mm}$

RoHS compliant
UNIT:mm

Scale	Free					Date	Name	Customer-No.	
TOLERANCE					Drawn	22.04.2014	Joanna	ASSMANN WSW-No. A-P04BFFA-S180-WP	
	±0.5				Approved	22.04.2014	Joanna		
DIM	TOL							Drawing-No.	
X.°	±X°							ASS 6265 CO	rev00
X.X°	±X°	Ⓞ	Drawn	22.04.2014	Joanna			Replace	Sheet
Angle	TOL	Id.	Modification	Date	Name				