


Data Sheet

SP025xxHDNC

(ASP025)

Page 1/4
Order Number
ASP025xx
xx=number of poles

Illustration

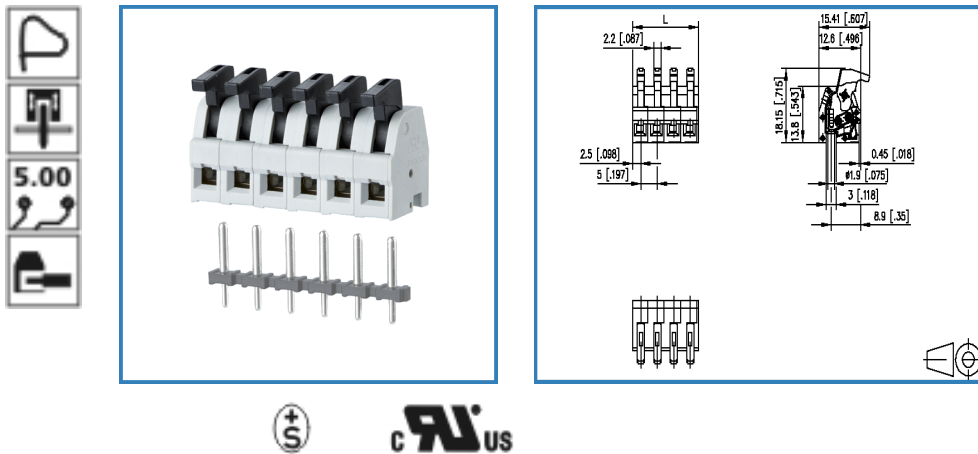

see enlarged drawing at the end of the document

Product specification

- spring clamp terminal block, pluggable
- centerline 5.00 mm, connection of connection 90°
- fittable without loss of poles
- color gray
- eccentric lever, wire entry perpendicular to plug direction

Data Sheet

SP025xxHDNC

(ASP025)

Page 2/4
Order Number
ASP025xx
xx=number of poles

Technical Data

General Data

min. number of positions	2		
max. number of positions	24		
Insulating material class	CTI 400		
clearance/creepage dist.	3.7 mm		
protection category	IP 20		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	250 V	500 V	500 V
Stossspannung	2.5 kV	4 kV	2.5 kV

Connection data

rat. wiring solid AWG/mm ² min-max	AWG 28/0.08 mm ² - AWG 16/1.5 mm ²
rat. wiring strand AWG/mm ² min-max	AWG 28/0.08 mm ² - AWG 18/0.75 mm ²

Material

insulating material	PA46
flammability class	V0

Climatic properties

Data Sheet

SP025xxHDNC

(ASP025)

Page 3/4
Order Number
ASP025xx
xx=number of poles

upper limit temperature	105 °C
-------------------------	--------

lower limit temperature	-40 °C
-------------------------	--------

General

tolerance	ISO 2768 -mH
-----------	--------------

Matching Part

310171	Type 017
--------	----------

310391	Type 039
--------	----------

310411	Type 041
--------	----------

314171	Typ 417
--------	---------

Accessories

720036-01-4	Flansch grau für Typ ASP025
-------------	-----------------------------

720036-02-2	Flansch schwarz für Typ ASP025
-------------	--------------------------------

Data Sheet

SP025xxHDNC

(ASP025)

Page 4/4


Order Number

ASP025xx

xx=number of poles

Illustration

Drawing

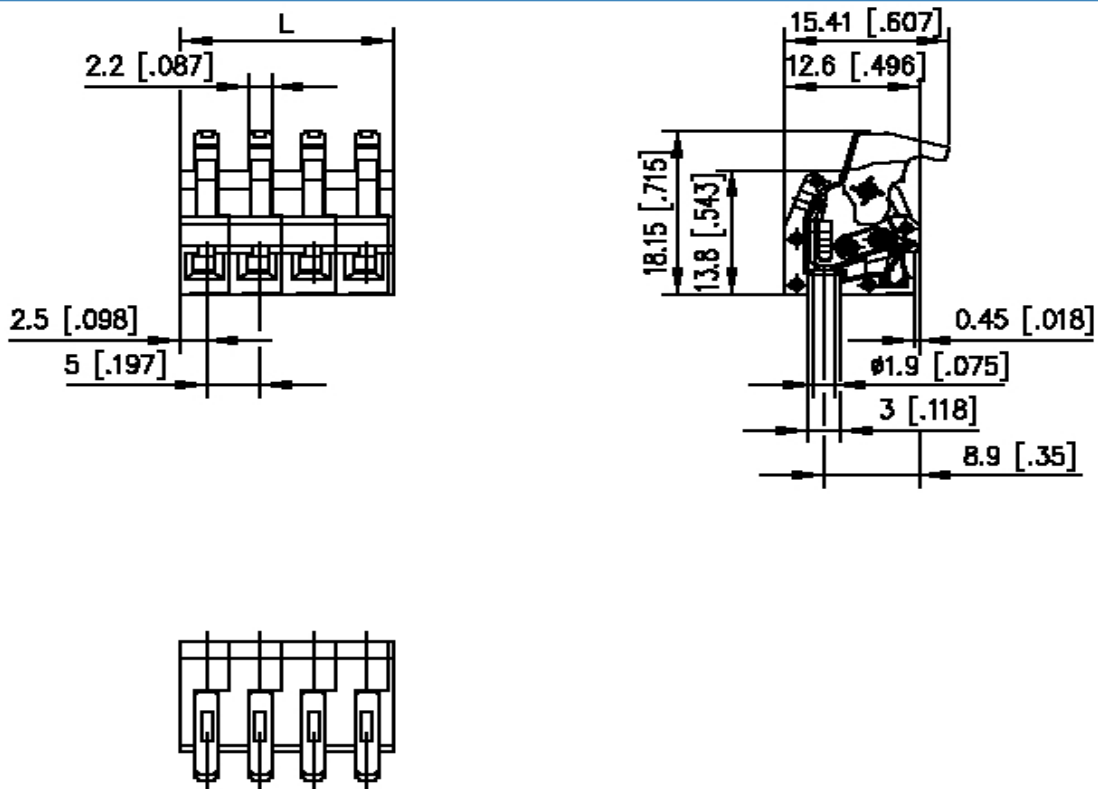

$L = (\text{pole size} - 1) \times \text{centerline} + 5 [0.197]$