




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION


ALTW
CONFIDENTIAL
2014-10-24
R&D DEPT.

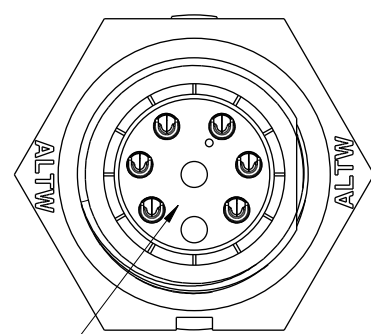


With Liquid Glue

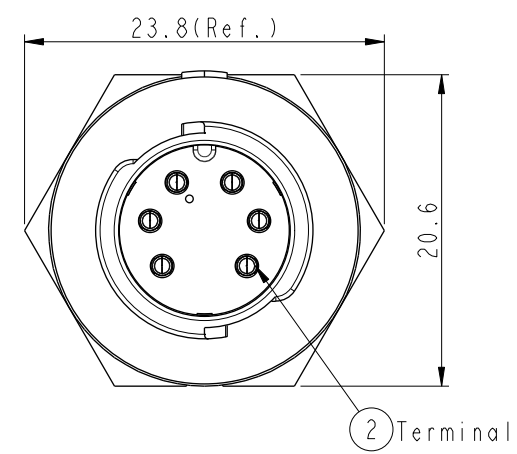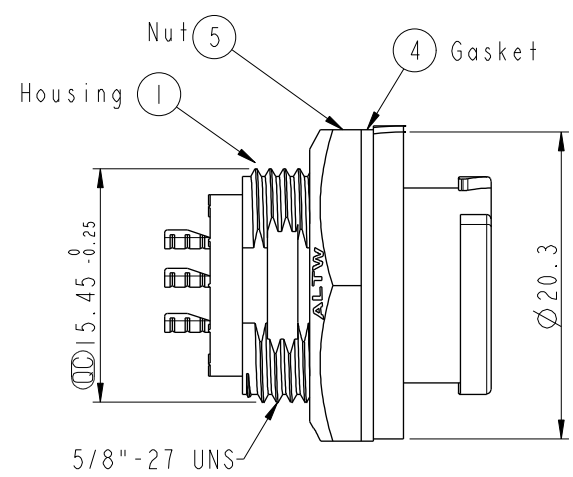


ALTW
DCC. DEPT.
CONFIDENTIAL
2014.11.26
ISSUED

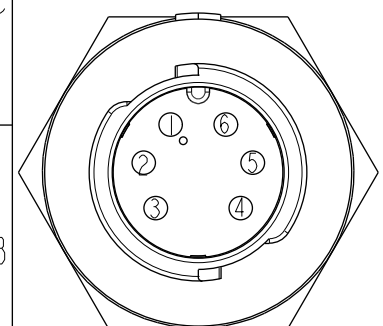

Pin Assignments
Front View

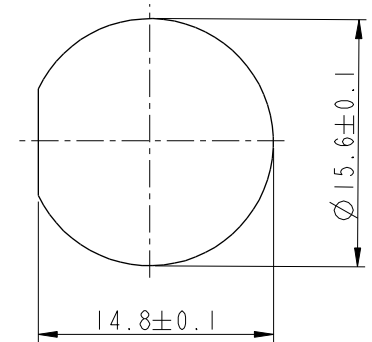

Recommended Panel Cut-out

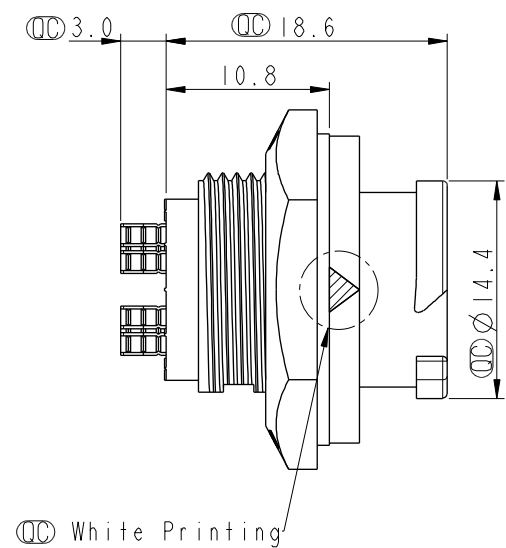

- Note:
- * $\varnothing$ Important Dimension To Check.
 - * Waterproof Rate: IP68
 - * Working Voltage Rating: AC 300 V
 - * Working Current Rating: 5A
 - * Flame Class: UL94V-0 (UV Resistance)
 - * Housing: Nylon+GF, Black
 - * Male Pin: Copper Alloy, Gold Plated
 - * Nut: Nylon+GF, Black
 - * Gasket: Silicone, Gray
 - * Panel Thickness Max: 4.5mm

UNIT:mm				TITLE X Lok B-Size Receptacle M Conn M 6 Pin		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO BD-06RMMS-QC8001		DRAWN BY Micky		DATE 2014-10-24			
TOLERANCE .X ±0.25		SCALE 2:1						SIZE A4		DWG NO BD-06RMMS-QC8001		CHECKED BY Spring		DATE 2014-10-24	
		REV. A						WC-REV. A.1		CUSTOMER ALTW		APPROVED BY kevin		DATE 2014-10-24	
				SHEET 1 OF 1											
				QC: Inspection item											
1		2		3				4		5		6		7	