

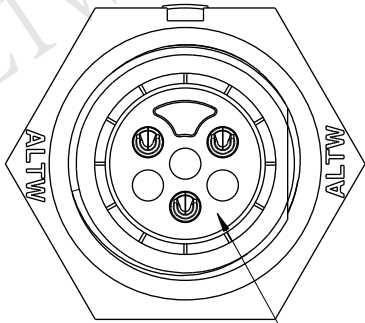

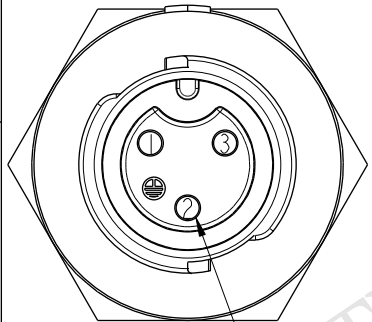



REV.	ECN NO.	DATE	SIGN	DESCRIPTION

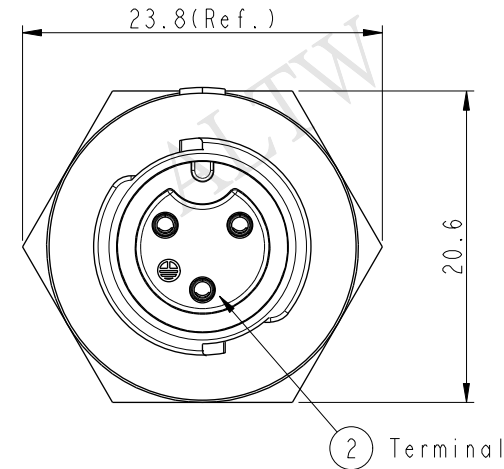


Whit Liquid Glue

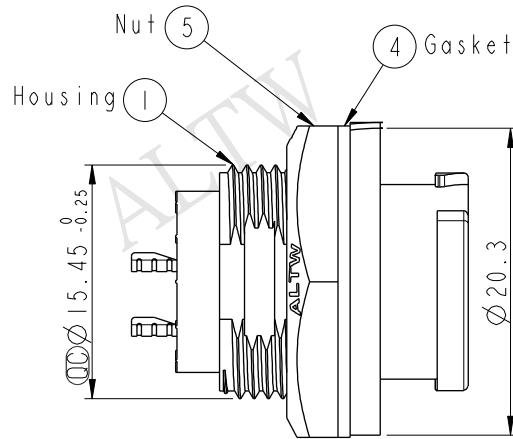

Pin Assignments
Front View



Recommended Panel Cut-out

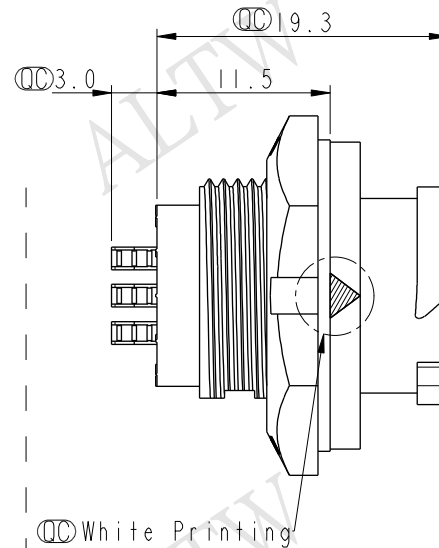

- Note:
- * $\varnothing$ Important Dimension To Check.
 - * Waterproof Rate: IP68(Unmated)
In 1 meter water within 24 hours
 - * Working Voltage Rating: AC 300 V
 - * Working Current Rating: 5A
 - * Housing: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Nut: Nylon+GF, Black
 - * Gasket: Silicone, Gray
 - * Panel Thickness Max: 4.5mm

UNIT:mm	TOLERANCE .X ±0.25			TITLE X Lok B-Size Receptacle Rear Fastened M Conn F 3 Pin		Amphenol LTW		ITEM NO BD-03RMFS-QC800P	DRAWN BY Wes Fan	DATE 2016-07-13
	SCALE 2:1			SIZE A4	SHEET 1 OF 1	安費諾亮泰企業股份有限公司		DWG NO BD-03RMFS-QC800P	CHECKED BY Spring Liu	DATE 2016-07-13
	REV. A			WC-REV. A.1	QC: Inspection item			CUSTOMER ALTW	APPROVED BY Kevin Hu	DATE 2016-07-13

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.