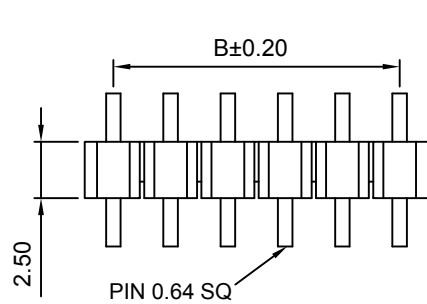
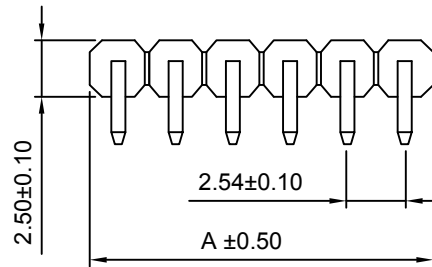
**RECOMMENDED PCB LAYOUT**General Tolerance: ± 0.05 **6 Position Example**

CONTACTS	DIMENSIONS	
	A	B
2	5.08	2.54
3	7.62	5.08
4	10.16	7.62
5	12.70	10.16
6	15.24	12.70

SPECIFICATIONS 规格

CURRENT RATING 电流额定值: 3 AMP

INSULATION RESISTANCE 绝缘电阻值: 1000MΩ MIN.

DIELECTRIC WITHSTANDING 耐电压: 500V AC

CONTACT RESISTANCE 接触电阻值: 20mΩ MAX.

OPERATING TEMPERATURE 工作温度: -40°C TO +105°C

CONTACT MATERIAL 端子物料: BRASS

PLATING 电镀: CONTACT AREA 接触面积: 30μ"-50μ" NICKEL UNDERPLATE, FOR PLATING
SEE ORDERING GRID.

INSULATOR MATERIAL 绝缘体物料: POLYESTER 聚酯, LCP, NATURAL, UL94V-0

SOLDERING PROCESS 可焊性:

WAVE 波峰焊: 250°C for 5-10 sec.

MANUAL SOLDER 人工焊接: 350°C for 3-5 sec

MATES WITH 配套之公头:

A: BG306

B: DIRECT SOLDER TO PCB 直接焊在PCB上。

Ordering Grid

BG304	XX	X	0500	L	X	REQUEST SAMPLES AND QUOTATION
No. of Contacts 02 to 06		Contact Plating A = Gold Flash All Over (Other plating options available on request)		Packing Options G = Plastic Box (Standard) D = Tube		
Dimension D (Footprint width) 0500 = 5.00mm (Standard) Or Specify Dimension D e.g. 0250 = 2.50mm				Insulator Material L = LCP (Natural)		

By	CM
DETAIL	DRAWING RELEASE
REV DATE	A 07/12/11



Tolerances (Except as noted)	Part Number:-	Date:-
Dimensions in mm	BG304	07 DEC 11
X.X ± 0.30	Description:-	
X.XX ± 0.20	2.54mm PITCH PIN HEADER, SINGLE ROW, U-SHAPE THRU-HOLE, SINGLE INSULATOR, NATURAL LCP	
Third Angle Projection	THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT	

White Lite
GCT
www.gct.co

Scale NTS	Revision A	Material See Note	Drawn by CM	E & OE	Sheet No. 1/1
--------------	---------------	----------------------	----------------	--------	------------------