



1	2	3	4	5	6	7	8
REV.	ECN NO.	DATE	SIGN	DESCRIPTION			




⑦ Sealing Nut




⑥ Clamp Ring




⑤ Seals B2



④ Seals B1





③ Lock Nut



② Housing





① O-Ring



Note:

- * Seals B1 for Cable OD: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$
(防水墊圈B1線徑: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$)
- * Seals B2 for Cable OD: $\varnothing 3.5\text{mm} \sim \varnothing 5.3\text{mm}$
(防水墊圈B2線徑: $\varnothing 3.5\text{mm} \sim \varnothing 5.3\text{mm}$)
- * One Set Unassembled in One PE Bag
(每一組未組裝, 放置於一個PE袋, 並封口)
- * Important Dimension.
- * Waterproof Rate : IP66
- * Ring: Black, EPDM
- * Housing: Black, Nylon+GF
- * Pin: Copper Alloy, Gold Plated
- * Lock Nut: Black, Nylon+GF
- * Seals: Black, EPDM
- * Clamping Ring: Black, Nylon
- * Sealing Nut: Black, Nylon
- * PE Bag: 90mm*85mm
- * Liquid Glue: Clear

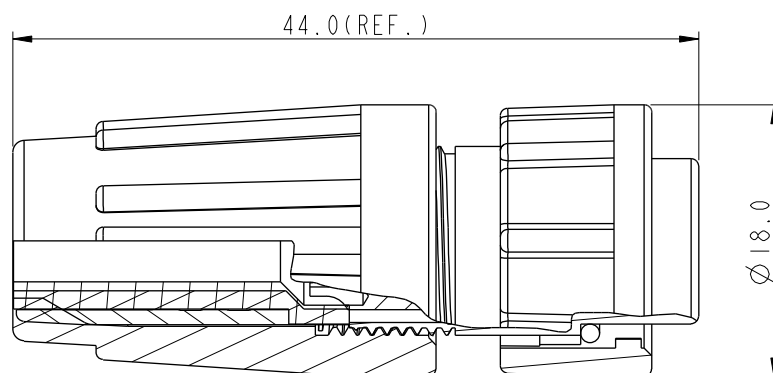Pin Assignments
Front View 前視圖

UNIT: mm		TOLERANCE		TITLE		Amphenol LTW		ITEM NO.	DRAWN BY	DATE
.X ±0.25		.XX ±0.1		Standard, Assy Lock 7Pin F Conn F Pin		安費諾亮泰企業股份有限公司		BD-07BFFA-LL6001	SamChang	2012-03-26
.XXX ±0.05		ANGLES ±1°		SCALE 1:1	SIZE A4	DWG NO. BD-07BFFA-LL6001		CHECKED BY Jeffrey	DATE 2012-04-05	
REV. A		WC-REV. A.2		SHEET 1 OF 1		CUSTOMER ALTW		APPROVED BY Lion	DATE 2012-04-05	
				QC: Inspection item						8 FMW10702-01-02A1