

BIAS TEES

CONNECTORIZED PACKAGES

(2) Frequency Range (MHz)	Isolation (dB) min.	Insertion Loss (dB) max.	(1) Current (mA) max. @ 50V max.	VSWR max.	P/N
10-1000	25	1.0	200	1.20:1	BT-01-*
500-2500	25	1.5	200	1.20:1	BT-02-*
10-4200	25	1.6	200	1.20:1	BT-03-*
1000-5000	25	0.5	1000	1.20:1	BT-04-*
10-3000	25	1.0	3000	1.20:1	BT-06-411
100-6000	25	1.0	500	1.20:1	BT-07-*
425-800	25	0.6	8000	1.20:1	BT-10-411
10-1000	25	0.5	200	1.20:1	BT-20-*
800-1000	30	0.5	5000	1.20:1	BT-21-*
1700-2000	30	0.5	5000	1.20:1	BT-22-*
500-3000	25	0.6	2000	1.20:1	BT-23-*
500-10000	25	1.0	200	1.20:1	BT-26-*

* Available in outline # 411 & 414 - SMA connectors are standard, refer to page 98 for more information.
Voltage for standard models is 50 volts.


Consult factory for higher current, to 10 Amps, and isolation requirements.

(1) Higher current models available, to 10 Amps, and isolation requirements. - Consult factory.

(2) Higher frequency bands available, consult factory.

Pin-out Table

Outline	RF In (DC Block)	RF/DC Output	DC In (Bias)	Ground
410	1	2	DC Connectors	Housing
411	1	3	2	Housing
414	1	3	2	Housing

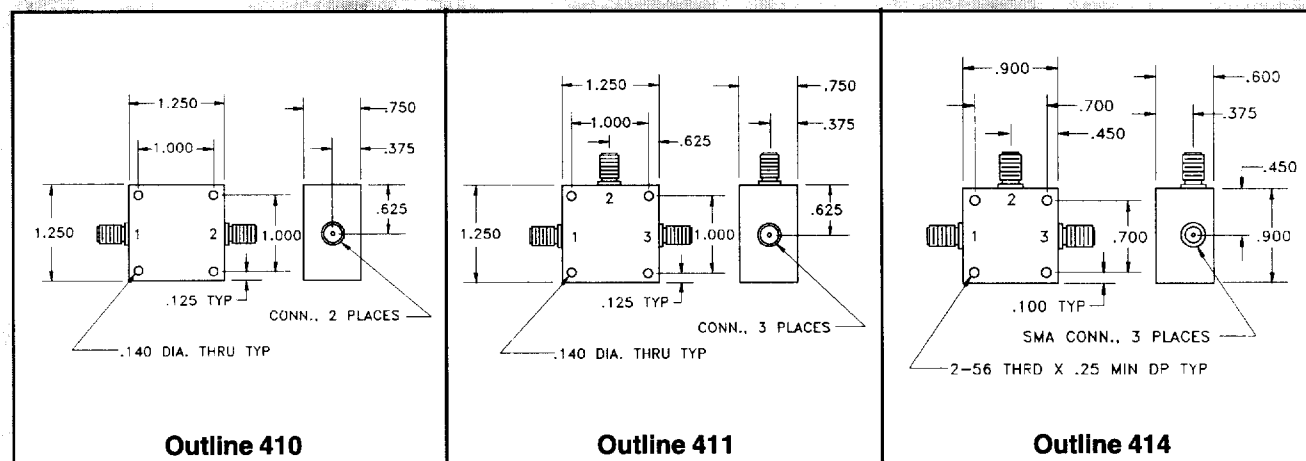

Miscellaneous
Components