




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-780050	2007/07/25	A.F. Valentino	Changed Pin Out, Applied New Format
C	LEN-790183	2007/09/13	WUFEI	Changed NUT
D	LEN-920142~45	2008/10/06	Li Xiu Zhi	Change Front View


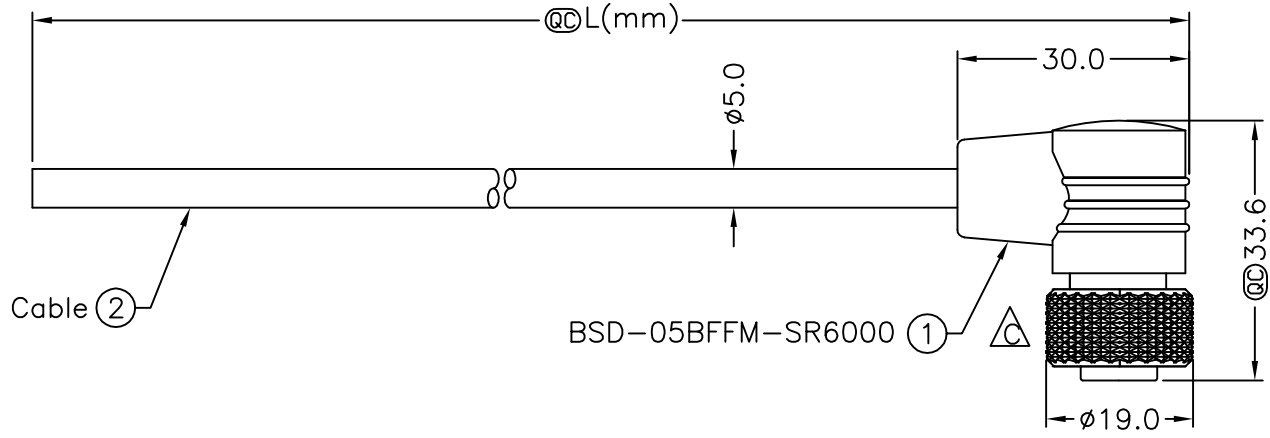


BSD-05BFFM-SR6AXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters



Conn.

- Note:
- * @C Important Dimension.
 - * Waterproof Rate: IP66
 - * Housing: Black, Nylon+GF
 - * Female Pin: Copper Alloy, Gold Plated
 - * Cable: Black, UL2464 24AWG*5C+D+Al.My. +Al/My, (UV Resistant) OD=5.0mm
 - * Cable Length Tolerance: 01M:40mm
 02M~05M:60mm
 06M~10M:100mm
 11M~30M:200mm
 31M~99M:500mm



Pin Assignments
Front View

Shield	Drain	地線
5	Green	綠
4	White	白
3	Black	黑
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE		Standard	
Cable Screw 5Pin F Conn. F Pin			
SCALE	Free	SHEET	1 OF 1
REV.	D	SIZE	A4
@C :Inspection Item			

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.