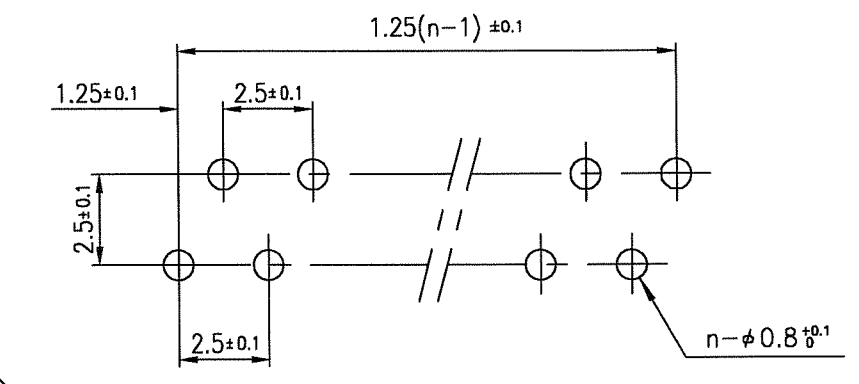


RECOMMENDED PC BOARD
THICKNESS : 1.4 ~ 1.8
HOLE PATTERN (COMPONENT SIDE) n : NO. OF CONTACTS








CAT. NO.	NO. OF CONTACTS (n)	A
BTFN6S-3SB7LF	6	11.45
BTFN8S-3SB7LF	8	13.95
BTFN10S-3SB7LF	10	16.45
BTFN12S-3SB7LF	12	18.95
BTFN14S-3SB7LF	14	21.45
BTFN16S-3SB7LF	16	23.95
BTFN18S-3SB7LF	18	26.45
BTFN20S-3SB7LF	20	28.95

n : NO. OF CONTACTS

THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

MATERIAL
INSULATOR : PBT RESIN GLASS REINFORCED (UL94V-0)
COLOR : BLACK

CONTACT : PHOSPHOR BRONZE
Sn Ni UNDER PLATED

mat'l. code					surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family 58ZF					CODE JP	
ltr	description	ecn no	dr	date	tolerances unless otherwise specified		±0.3				title RECEPTACLE CONNECTOR (DIP) (Cat. No. BTFN__S-3SB7LF)						
A	RELEASED	J05-0439	H.T	7/12/05	angles	linear											
B	CHANGED LOGO	J06-0466	H.T	11/13/06					scale λ		dwg no sheet 1 of 1 JSC 96579 A3						
					dr		11/13/06										
					engr		11/13/06										
					chr	R. Shouje	11/13/06										
					appd	J. Gudam	11/14/06										
sheet index		revision sheet		B	1												Rev. B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[BTFN12S-3SB7LF](#)