
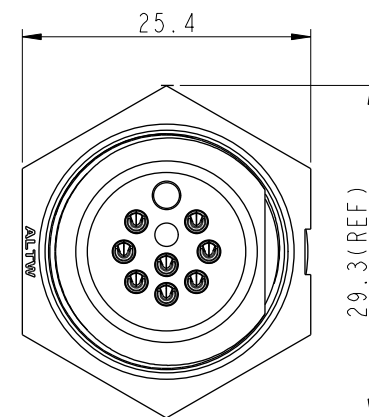
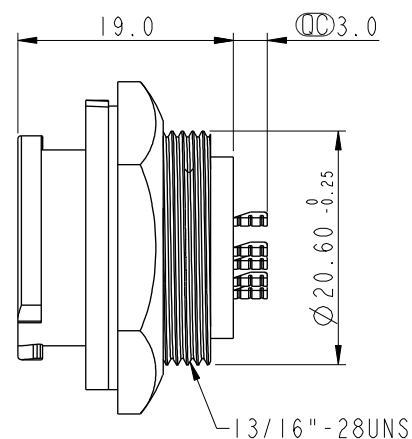





REV.	ECN NO.	DATE	SIGN	DESCRIPTION




Ⓞ White Printing

③ Liquid Glue

Pin Assignments
Front View


Recommenderd Panel Cut-Out

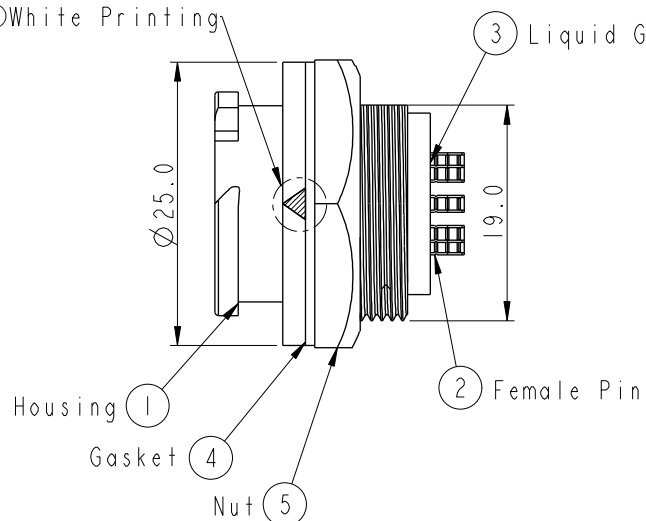

Note:

- * Ⓞ Important Dimension To Check.
- * Waterproof Rate: IP68
- * Working Voltage Rating: AC 300V
- * Working Current: 5A
- * Housing: Nylon+GF, Black
- * Female Pin: Copper Alloy, Gold Plated
- * Liquid Glue: Black
- * Nut: Nylon+GF, Black
- * Gasket: Silicone, Gray
- * Panel Thickness Max: 4.2mm

UNIT:mm



TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE
X-Lok C Size Receptacle
Rear 8 Pin M Conn. F Pin

SCALE 3:2 SIZE A4 SHEET 1 OF 1

REV. A WC-REV. A.1 Ⓞ Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO
CD-08RMFS-QC8001

DWG NO
CD-08RMFS-QC8001

CUSTOMER
ALTW

DRAWN BY
Micky

CHECKED BY
Spring

APPROVED BY
Kevin

DATE
2014-12-12

DATE
2014-12-12

DATE
2014-12-12