
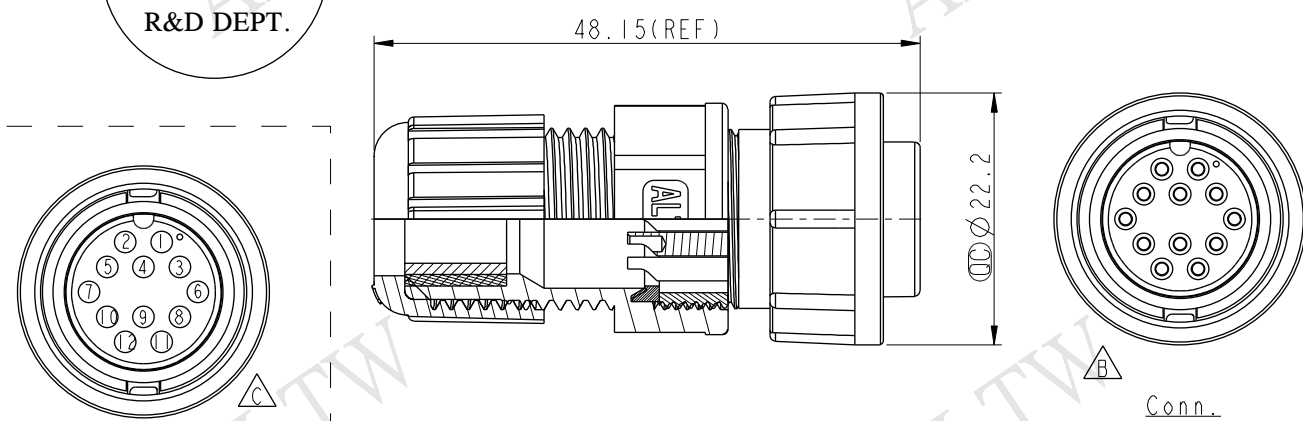



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-0C0770	2010/12/21	WuHaiYan	Modify Pin digit Position
D	LEN1260009	2012/05/30	Vicky	Modify Note.
E	LEN1530246	2014/12/25	Ruru	Change Logo

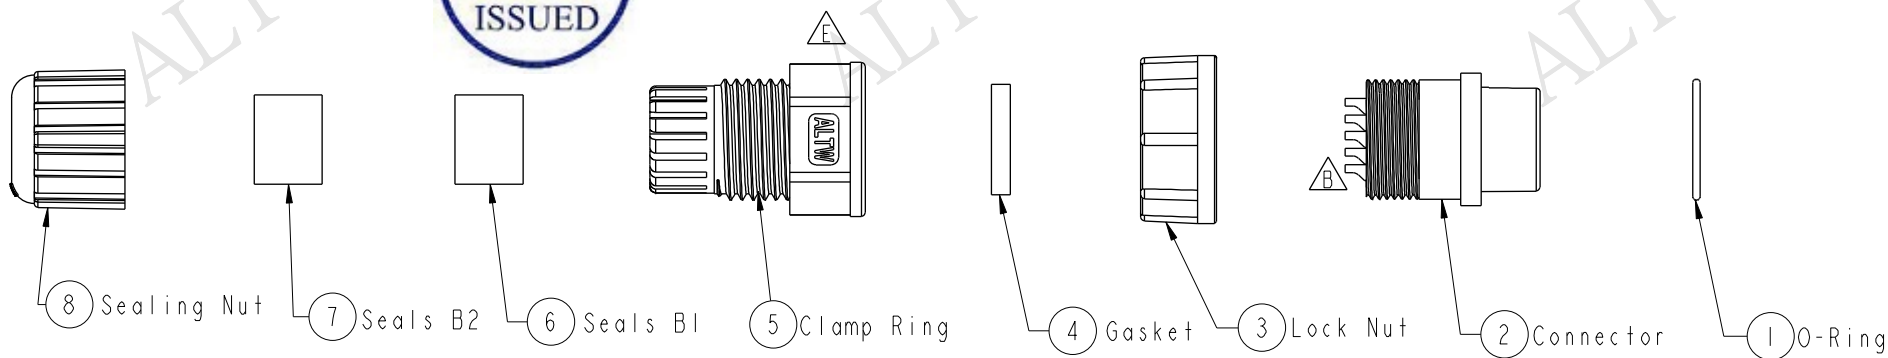

Pin Assignments
Front View 前視圖

- Note:
- * (CC) Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * O-Ring: EPDM, Black.
 - * Lock Nut: Nylon+GF, Black.
 - * Gasket: Silicone, Black
 - * Seals: EPDM, Black.
 - * Clamp Ring: Nylon, Black.
 - * Sealing Nut: Nylon, Black.
 - * Seals B1 for Cable OD: $\varnothing 7.6\text{mm} \sim \varnothing 9.6\text{mm}$
 - * Seals B2 for Cable OD: $\varnothing 4.0\text{mm} \sim \varnothing 7.6\text{mm}$
 - * One Set Unassembled In One PE Bag.

UNIT:mm		TITLE Middle, Assy Lock 12Pin F Conn F Pin		ITEM NO CD-12BFFA-LL7001		DRAWN BY Ruru		DATE 2014-12-25	
TOLERANCE .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLES $\pm 1^\circ$		SCALE 1:1	SIZE A4	SHEET 1	DWG NO CD-12BFFA-LL7001	CHECKED BY Rita	DATE 2014-12-25		
REV. E		WC-REV. A.2	(CC): Inspection item		CUSTOMER ALTW	APPROVED BY Win	DATE 2014-12-25		

Amphenol LTW
安費諾亮泰企業股份有限公司