

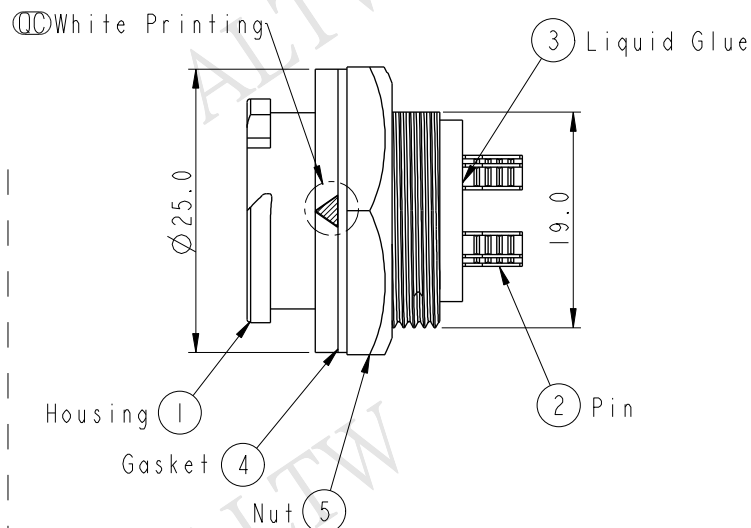
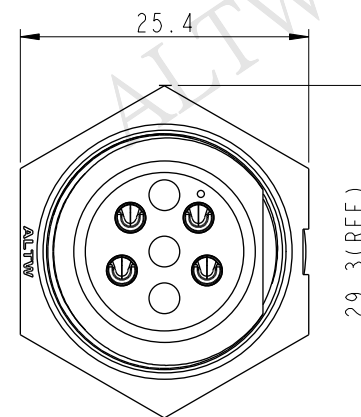
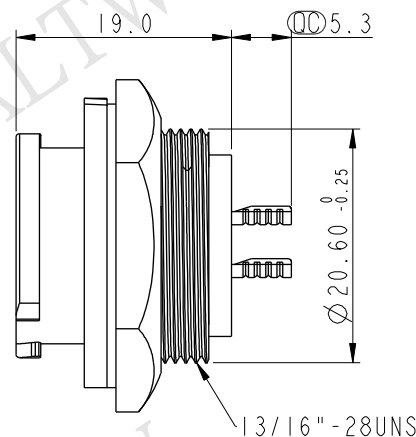




REV.	ECN NO.	DATE	SIGN	DESCRIPTION



- Note:
- * $\varnothing$ Important Dimension To Check.
 - * Waterproof Rate: IP68
 - * Working Voltage Rating: AC 300V
 - * Working Current: 10A
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Liquid Glue: Black
 - * Nut: Nylon+GF, Black
 - * Gasket: Silicone, Gray
 - * Panel Thickness Max: 4.2mm



Pin Assignments
Front View



Recommernded Panel Cut-Out

UNIT:mm				TITLE X-Lok C Size Receptacle Rear 4 Pin M Conn. M Pin		ITEM NO CB-04RMMS-QC8001	DRAWN BY Micky	DATE 2014-11-04
TOLERANCE		.X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 3:2	SIZE A4	DWG NO CB-04RMMS-QC8001	CHECKED BY Spring	DATE 2014-11-04
REV. A		WC-REV. A.2		SHEET 1 OF 1		CUSTOMER ALTW	APPROVED BY Kevin	DATE 2014-11-04

QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.