

CLE SERIES

(0,80 mm) .0315"

COST EFFECTIVE MICRO SOCKET

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?CLE

Insulator Material:
Black Liquid Crystal Polymer
Contact Material:
BeCu

Plating:
Au over 50µ" (1,27 µm) Ni
Current Rating (CLE/FTE):
2.7 A per pin
(1 pin powered per row)

Operating Temp Range:
-55°C to +125°C
Contact Resistance:
15 mΩ

Insertion Depth:
Top Entry = (1,73 mm) .068" to (3,18 mm) .125" with (0,38 mm) .015" wipe, or pass-through
Bottom Entry = (3,23 mm) .127" minimum plus board thickness

Insertion Force:
(Single contact only)
2.0 oz (0,56 N)

Normal Force:
75 grams (0,73 N)
Withdrawal Force:
(Single contact only)
1.2 oz (0,33 N)

Max Cycles:
100 with 10µ" (0,25 µm) Au
RoHS Compliant:
Yes

Processing:
Lead-Free Solderable:
Yes

SMT Lead Coplanarity:
(0,10 mm) .004" max (04-65)
(0,15 mm) .006" max (66-90)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality






Note: Some lengths, styles and options are non-standard, non-returnable.





Mates with:
FTE, AW



Ideal for pass-through applications

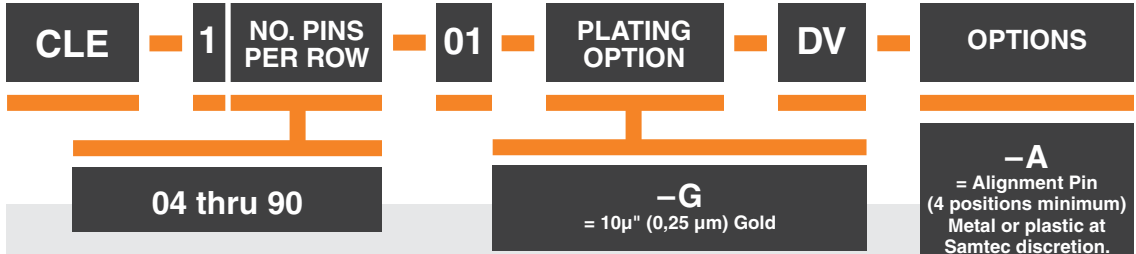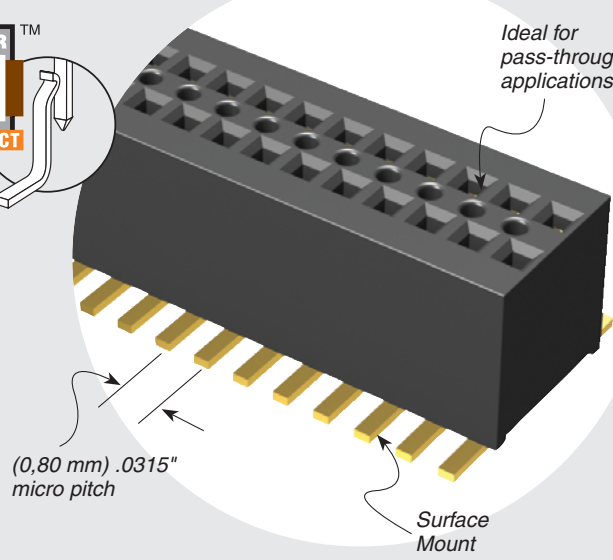

- A**
= Alignment Pin
(4 positions minimum)
Metal or plastic at Samtec discretion.
- K**
= (3,50 mm) .138" DIA
Polyimide film
Pick & Place Pad
(8 positions minimum)
- P**
= Metal Pick & Place Pad
(8 positions minimum)
- TR**
= Tape & Reel Packaging

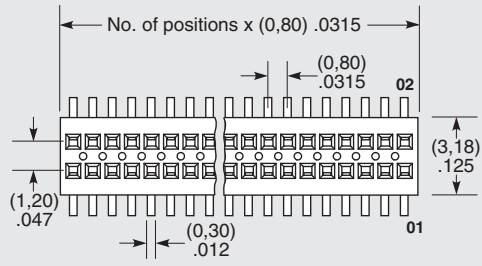

TAPE & REEL AVAILABILITY

No tooling charges.
Minimum order is the lesser of a full reel quantity or 125 pieces.
Order any quantity above minimum.
In-house design, manufacture.
Quick turn-around.
Call Samtec for specifications and ordering information.