


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

1. DO-IT-YOURSELF (DIY) 4mm IN-LINE JACK, SCREW ATTACHMENT.
2. SPECIFICATIONS:
INSULATOR BODY: POLYAMIDE (NYLON)
JACK BODY: BRASS, NICKEL PLATED
3. RATING:
VOLTAGE: 1,200V AC/DC
CURRENT: 36A MAX.
TEMPERATURE: -20° C TO +80° C.
4. MAXIMUM WIRE SIZES:
CONDUCTOR: Ø.090 (12AWG)
STRIP LENGTH: .25 (6.4)

PART NUMBER

CT2215-#


COLOR: 0 - BLACK
2 - RED
4 - YELLOW
5 - GREEN
6 - BLUE
9 - WHITE

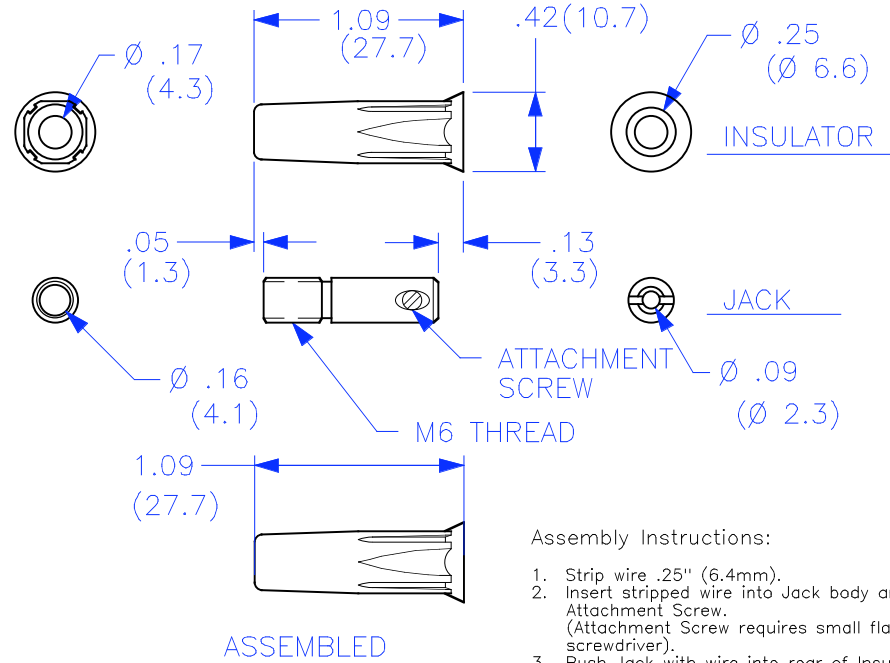

Assembly Instructions:

1. Strip wire .25" (6.4mm).
2. Insert stripped wire into Jack body and tighten Attachment Screw.
(Attachment Screw requires small flat blade screwdriver).
3. Push Jack with wire into rear of Insulator housing and thread.
4. Using same small screwdriver, engage Jack slots through rear of Insulator and snug Jack into Insulator housing.

THIRD ANGLE PROJECTION



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS
± 1/32 .XX ± .02
.XXX ± .005
DO NOT SCALE DRAWING

MATERIAL

FINISH

NEXT ASSY

USED ON

APPLICATION

CONTRACT NO.

APPROVALS

DATE

DRAWN WDH

7/11/99

CHECKED

ENGR.

DESIGN ACTIVITY

Cal Test Electronics

22820 Savi Ranch Parkway
Yorba Linda, CA 92887-4610

TITLE

DIY 4mm JACK, SCREW

SIZE
A

CAGE CODE
43F45

DWG. NO.

P221500

REV.

—

SCALE 1:1

SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Global Specialties:

[CT2215-5](#) [CT2215-9](#) [CT2215-6](#) [CT2215-0](#) [CT2215-2](#) [CT2215-4](#)