

THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

- DO-IT-YOURSELF (DIY) Ø4mm RIGHT-ANGLE SHEATH BANANA PLUG, SCREW ATTACHMENT
- SPECIFICATIONS:
INSULATOR BODY: POLYPROPYLENE
PLUG BODY: BRASS, NICKEL PLATED
CONTACT SPRING: BECU, NICKEL PLATED
- RATING:
VOLTAGE: 1000 V CATIII P2 (* Instructions)
REINFORCED INSULATION, CE MARK
CURRENT: 20 A MAX.
INTERNAL RESISTANCE: <10 mΩ
TEMPERATURE: -20° TO +80° C.
- MAXIMUM WIRE SIZES:
CONDUCTOR: Ø .090 (12AWG)
INSULATION: Ø .16 (Ø 4.0)
STRIP LENGTH: .20 (5)

PART NUMBER

CT3203-#

COLOR: 0 - BLACK
2 - RED
4 - YELLOW
5 - GREEN
6 - BLUE
9 - WHITE


Assembly Instructions:

- Slide wire through Housing.
- Strip wire .20" (5 mm).
- Insert stripped wire into Plug Assembly and tighten Set-Screw (conductor). Set-Screw requires 1.5 mm Allen Wrench (Cal Test P/N CT2919).
- Push Plug Assembly into Housing & straighten wire lead.
- Push Housing Cover onto Housing and seat firmly.
- Plug is assembled.


* IEC specification is met only if assembled lead wire meets requirement and voltage rating.

REVISIONS

REV.	DESCRIPTIONS	DATE	APPROVED
—	CLASS A RELEASED	11/12/07	

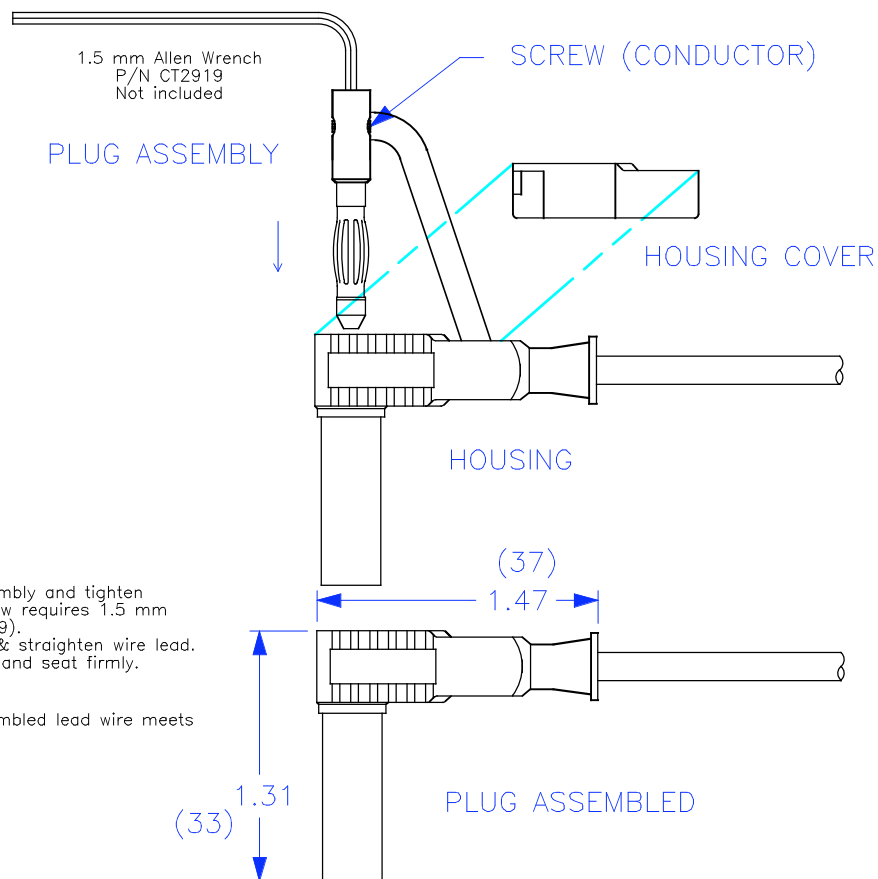

THIRD ANGLE PROJECTION



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS
± 1/32 .XX ± .02
DO NOT SCALE DRAWING .XXX ± .005

MATERIAL

FINISH

NEXT ASSY

USED ON

APPLICATION

CONTRACT NO.

APPROVALS

DRAWN WDH

CHECKED

ENGR.

DESIGN ACTIVITY

DATE

11/12/07

Cal Test Electronics

22820 Savi Ranch Parkway
Yorba Linda, CA 92887-4610

TITLE

DIY 4mm RIGHT-ANGLE SHEATH
PLUG, SCREW ATTACHMENT

SIZE
A

CAGE CODE
43F45

DWG. NO.

P320300

REV.

—

SCALE 1:1

SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Global Specialties:

[CT3203-9](#) [CT3203-5](#) [CT3203-4](#) [CT3203-6](#) [CT3203-0](#) [CT3203-2](#) [CT3203-S-0](#) [CT3203-S-4](#) [CT3203-S-9](#) [CT3203-S-2](#) [CT3203-S-6](#) [CT3203-S-5](#)