

THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

- DO-IT-YOURSELF (DIY) Ø4mm STACKING SHEATH BANANA PLUG, SCREW ATTACHMENT
- SPECIFICATIONS:
INSULATOR BODY: POLYPROPYLENE
PLUG BODY: BRASS, NICKEL PLATED
CONTACT SPRING: BECU, NICKEL PLATED
- RATING:
*VOLTAGE: 1000V CAT III / 600V CAT IV P2
REINFORCED INSULATION, CE MARK
CURRENT: 36A MAX.
INTERNAL RESISTANCE: <10mΩ
TEMPERATURE: -20° TO +80° C.
- MAXIMUM WIRE SIZES:
CONDUCTOR: Ø.090 (12AWG)
INSULATION: Ø.16 (Ø4.0) MAX.
STRIP LENGTH: .25 (6.4)
* With IEC rated test lead wire.


PART NUMBER

CT2631-#

COLOR: 0 - BLACK
2 - RED
4 - YELLOW
5 - GREEN
6 - BLUE
9 - WHITE

REVISIONS


REV.	DESCRIPTIONS	DATE	APPROVED
-	CLASS A RELEASED	2/11/00	
A	CONFIGURATION CHANGE; ADDRESS	7/9/03	
B	Rating & configuration change	5/9/07	

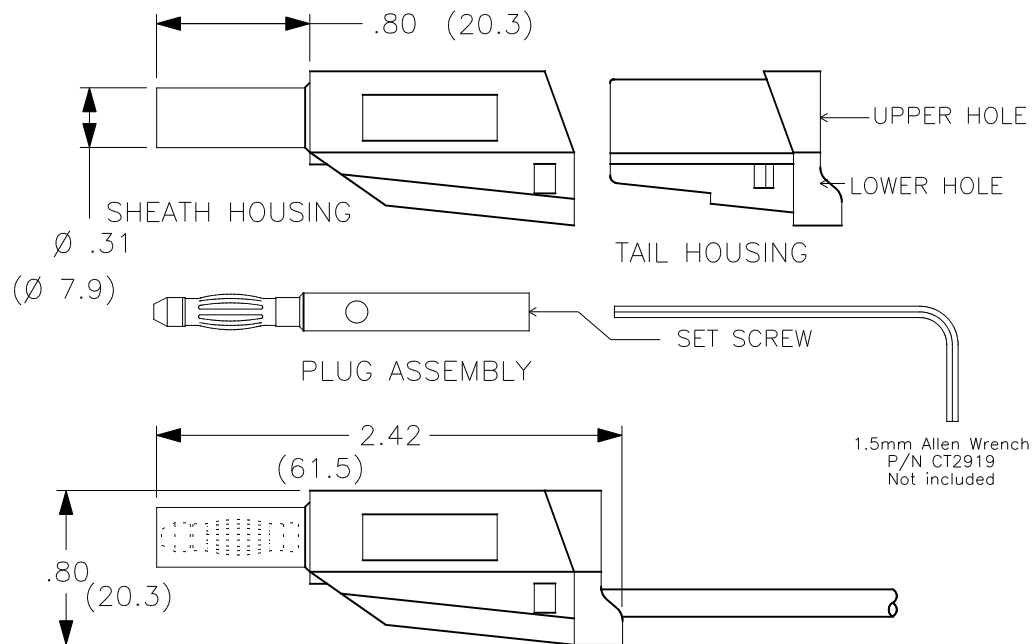

Assembly Instructions:

- Slide wire through lower hole in Tail Housing.
- Strip wire .25" (6.4mm).
- Insert stripped wire into Plug Assembly side hole and tighten Set-Screw. Set-Screw requires 1.5mm Allen Wrench (Cal Test P/N CT2919).
- Push Plug Assembly into Tail Housing upper hole and take slack out of wire.
- Snap Tail Housing assembly into Sheath Housing.

THIRD ANGLE PROJECTION



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS
± 1/32 .XX ± .02
.XXX ± .005
DO NOT SCALE DRAWING

CONTRACT NO.

APPROVALS	DATE
DRAWN WDH	2/10/00
CHECKED	
ENGR.	
DESIGN ACTIVITY	

Cal Test Electronics

22820 Savi Ranch Parkway
Yorba Linda, CA 92887-4610

TITLE

**DIY 4mm STACKING SHEATH
PLUG, SCREW ATTACHMENT**

SIZE	CAGE CODE	DWG. NO.	REV.
A	43F45	P263100	B
SCALE	1:1	SHEET	1 OF 1

NEXT ASSY

USED ON

APPLICATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Global Specialties:

[CT2631-6](#) [CT2631-9](#) [CT2631-2](#) [CT2631-5](#) [CT2631-4](#) [CT2631-0](#) [CT2631-S-5](#) [CT2631-S-0](#) [CT2631-S-6](#) [CT2631-S-9](#) [CT2631-S-4](#) [CT2631-S-2](#)