


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
—	CLASS A RELEASED	7/10/03	

- DO-IT-YOURSELF (DIY) Ø4mm SHEATH BANANA JACK, SCREW ATTACHMENT
- SPECIFICATIONS:  
INSULATOR BODY: POLYPROPYLENE  
JACK BODY: BRASS, NICKEL PLATED
- RATING:  
VOLTAGE: 1000V CATIII P2 (per INSTRUCTIONS)  
REINFORCED INSULATION, CE MARK  
CURRENT: 36A MAX.  
INTERNAL RESISTANCE: <10mΩ  
TEMPERATURE: -20° TO +80° C.
- MAXIMUM WIRE SIZES:  
CONDUCTOR: Ø.090 (12AWG)  
INSULATION: Ø.16 (4.0) MAX.  
STRIP LENGTH: .25 (6.4)

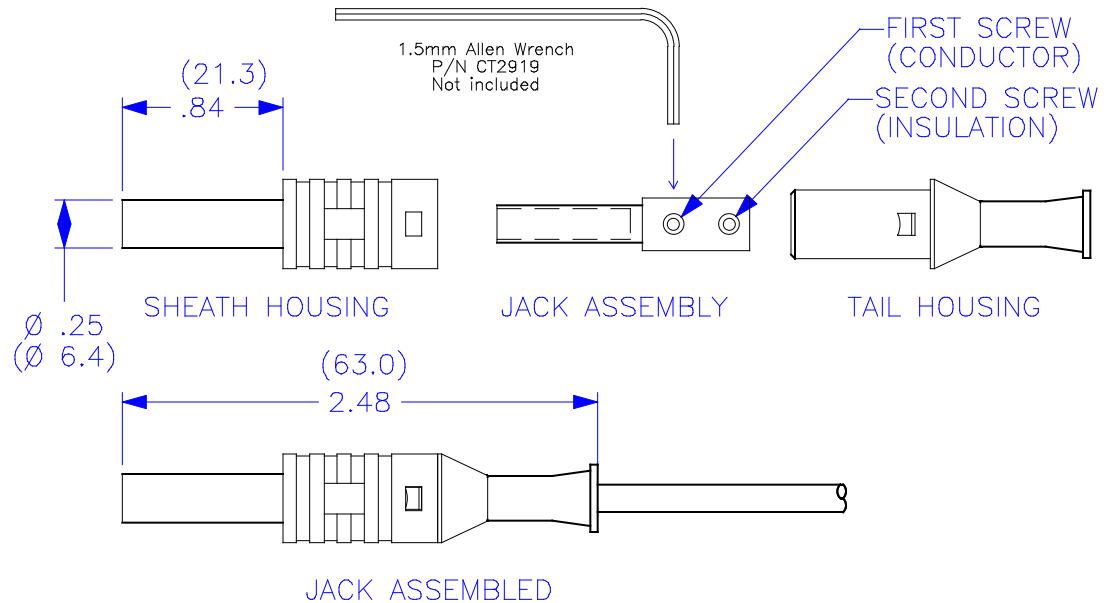

## PART NUMBER

CT3134-#

COLOR: 0 - BLACK  
2 - RED  
4 - YELLOW  
5 - GREEN  
6 - BLUE  
9 - WHITE

### Assembly Instructions:

- Slide wire through Tail Housing.
- Strip wire .25" (6.4mm).
- Insert stripped wire into Jack Assembly and tighten First Set-Screw (conductor). Set-Screws use 1.5mm Allen Wrench (Cal Test P/N CT2919).
- Snug Second Set-Screw on wire insulation.
- Push Jack Assembly into Tail Housing.
- Snap Tail Housing assembly into Sheath Housing.

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02 XXX ± .005 DO NOT SCALE DRAWING		CONTRACT NO.		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610			
		MATERIAL		APPROVALS		DATE		TITLE DIY SHEATH JACK, SCREW ATTACHMENT	
		FINISH		DRAWN WDH		7/10/03			
NEXT ASSY		USED ON		CHECKED		ENGR.		SIZE A	
APPLICATION				DESIGN ACTIVITY				CAGE CODE	
								DWG. NO. P313400	
								REV. —	
								SCALE 1:1	
								SHEET 1 OF 1	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Global Specialties:

[CT3134-5](#) [CT3134-0](#) [CT3134-2](#) [CT3134-4](#) [CT3134-6](#) [CT3134-S-6](#) [CT3134-S-4](#) [CT3134-S-5](#) [CT3134-9](#) [CT3134-S-9](#) [CT3134-S-2](#) [CT3134-S-0](#)