

THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

- 4mm SLIM SAFETY ADAPTER.
APPLICATION: CONVERTS STANDARD 4mm JACK TO ACCEPT SHEATH BANANA PLUGS. UPGRADES JACK TO IEC SPECIFICATIONS.
- SPECIFICATIONS:
INSULATOR: POLYACETAL
CONTACT: BRASS, NICKEL PLATED
SET SCREW: STEEL
- RATING:
VOLTAGE: 400 V CAT I P2 (IEC 61010-031)
CURRENT: 36 A MAX.
RESISTANCE: <5 mΩ.
TEMPERATURE: -20° C TO +80° C.
- INSERT ADAPTER INTO SOCKET, TIGHTEN INTERNAL SET SCREW WITH 1.5 mm ALLEN WRENCH, SUPPLIED SPERATELY (CT2919)


PART NUMBER

CT2575-#

COLOR: 0 - BLACK
2 - RED
4 - YELLOW
5 - GREEN
6 - BLUE
9 - WHITE

REVISIONS


REV.	DESCRIPTIONS	DATE	APPROVED
—	CLASS A RELEASED	7/12/99	
A	CORRECTION IN CONFIGURATION; NOTE 3. VOLTEGE 400 V WAS 500 V.	9/24/03	

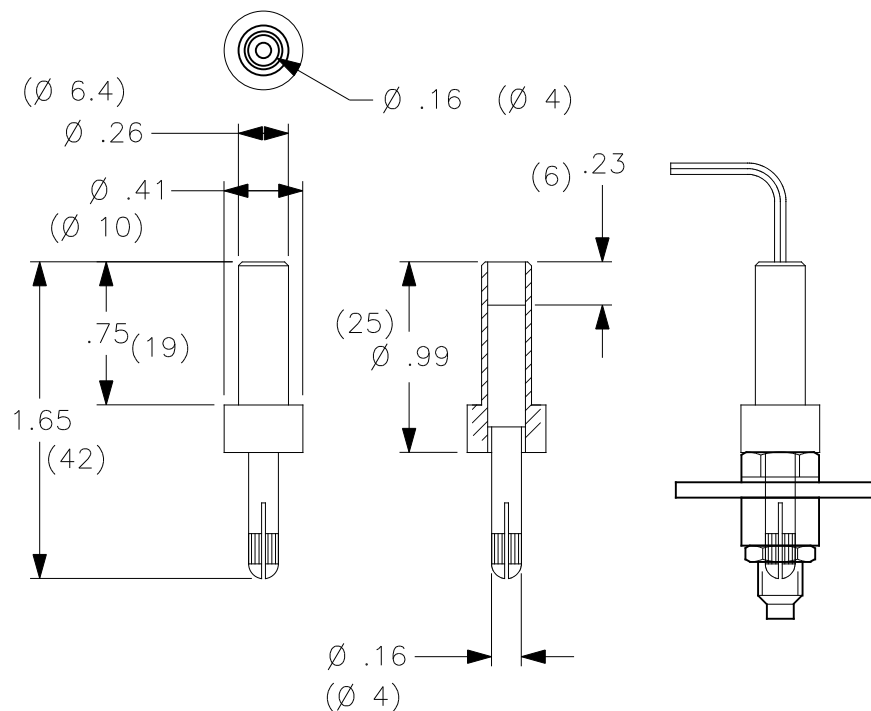

Assembly Instructions:

- Insert Safety Adapter in 4mm Banana Plug Socket. (Reference CT2228-#)
- Tighten internal Set-Screw using 1.5mm Allen Wrench (Cal Test P/N 2919).

THIRD ANGLE PROJECTION



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS
± 1/32 .XX ± .02
.XXX ± .005
DO NOT SCALE DRAWING

CONTRACT NO.

APPROVALS

DRAWN WDH

CHECKED

ENGR.

DESIGN ACTIVITY

DATE

7/12/99

Cal Test Electronics

22820 Savi Ranch Parkway
Yorba Linda, CA 92887-4610

TITLE

**4mm SLIM SAFETY SOCKET
ADAPTER**

SIZE
A

CAGE CODE
43F45

DWG. NO.

P257500

REV.
A

SCALE 1:1

SHEET 1 OF 1

NEXT ASSY

USED ON

APPLICATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Global Specialties:

[CT2575-4](#) [CT2575-0](#) [CT2575-2](#) [CT2575-5](#) [CT2575-6](#) [CT2575-9](#)