
Thin Film Common Mode Filter

ACMF-03





> FEATURES:

- Compact thin film low profile design
- Effective for suppressing common mode noise at high frequency
- Wide bandwidth (cutoff frequency: 4GHz) for high speed differential signals.
- Supports lead-free soldering.

> APPLICATIONS:

- Common mode noise suppression of differential signal lines in high speed and high-density digital equipments such as USB 2.0, IEEE1394, LVDS, Digital Camera, Scanner, etc.
- Digital audio and video equipments such as PDA, DSC, DVC, CD Player, DVD Player, etc.


► ELECTRICAL SPECIFICATIONS:


Operating Temperature: -55°C to +150°C


Storage Temperature: +22°C to +28°C, 80% RH max (In tape and reel)


Part No	Impedance (Ω)	Impedance Tolerance (%)	Test Frequency (MHz)	DCR (Ω) [1 line].	IDC (mA) max.	Rated Voltage (V) max.	Cutoff Frequency (GHz) typ.	Insulation Resistance (MΩ) min.
ACMF-03-350-T	35	±20%	100	1.8±30%	100	10	8	10
ACMF-03-650-T	65	±20%	100	2.5±30%	100	10	5	10
ACMF-03-900-T	90	±20%	100	2.8±30%	100	10	4	10


FREQUENCY CHARACTERISTICS















ABRACON IS ISO 9001:2008 CERTIFIED



Thin Film Common Mode Filter


ACMF-03






Dimension: mm

OUTLINE DIMENSION:

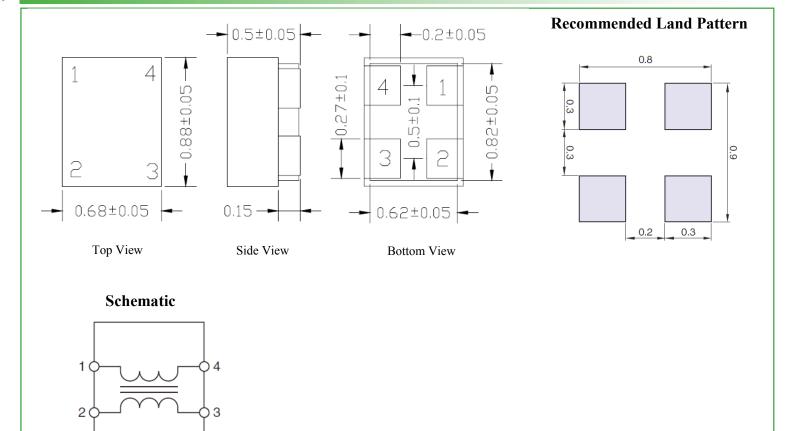

▶ REFLOW PROFILE:

No Polarity

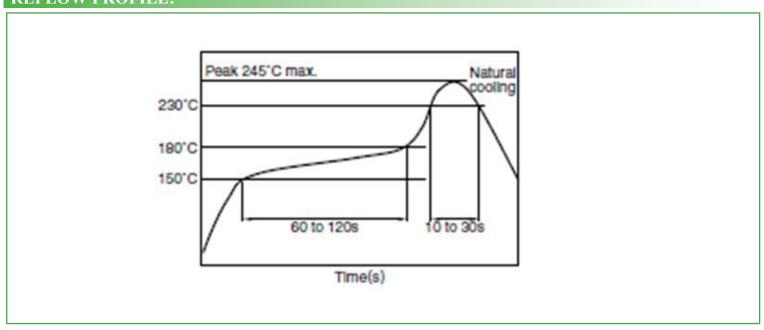







Thin Film Common Mode Filter

ACMF-03








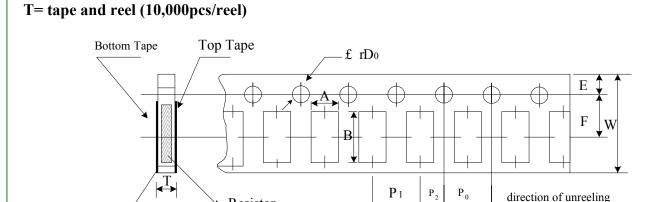

Resistor

Paper Tape

A	В	W	E	F	P0	P1	P2	OD_0	T
0.78±0.03	1.04±0.03	8.00±0.10	1.75±0.05	3.5±0.05	4.00±0.10	4.00±0.10	2.00±0.05	1.55±0.05	0.60±0.03

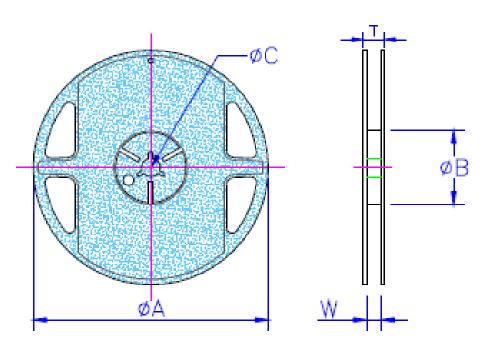

 ØA
 ØB
 ØC
 W
 T

 178.0±1.0
 60.0+1.0
 13.5±0.7
 9.5±1.0
 11.5±1.0

Dimension: mm

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.





Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

ACMF-03-530 ACMF-03-300 ACMF-03-900 ACMF-03-300-T ACMF-03-530-T ACMF-03-900-T ACMF-03-350-T