




1502



1508

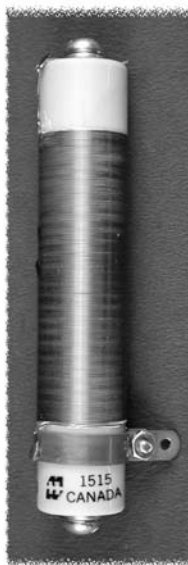

1515



1518



1521

Chokes

## R.F. CHOKES

- Low loss ceramic or powdered iron forms
- Tolerance +/- 10% on inductance
- Catalog numbers 1515, 1518, 1521 designed for heavy duty use in linear amplifiers or other transmitter applications.
- Wound on 1" dia. ceramic forms with standoff insulators and 1/4-20 mounting bolt.

Part No.	D.C. mA	Induct. (mH)	D.C. Res. (ohms)	No. of Pies	Form Type	Length (Inches)	Wt. Oz.
1502	500	0.007	1.3	Layer	Ceramic	1.5	0.25
1508	500	0.035	3.1	Layer	Ceramic	3	1.3
1515	500	0.25	3.0	Layer	Ceramic	4	8
1518	750	0.1	1.2	Layer	Ceramic	4	8
1521	1000	0.09	0.68	Layer	Ceramic	4	8

### EUROPE

Basingstoke, UK 01256 812812

### AUSTRALIA

Queenstown, Australia 61-8-8240-2244

[www.hammondmfg.com](http://www.hammondmfg.com)



### CANADA

Guelph, Ontario (519) 822-2960  
St. Laurent, Quebec (514) 343-9010

### USA

Cheektowaga, NY (716) 630-7030



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hammond:](#)

[1509](#) [1506](#) [1502](#) [1508](#) [1500](#) [1521](#) [1515](#) [1510](#) [1518](#)